



Recorders Data Loggers

Waveform recording
Data logging




Current Probes Clamp Sensors

Non-contact sensing



Impedance Analyzers Battery Testers

Electronic components measurement
Renewable energy measurement

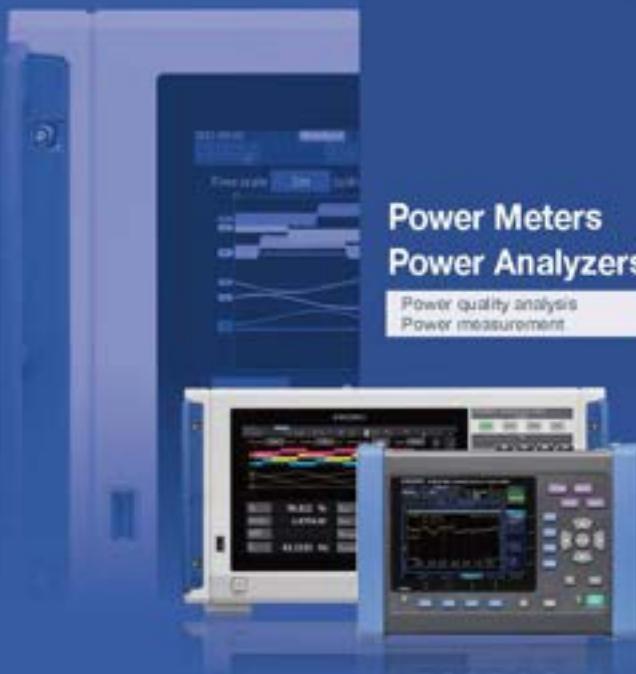

Power Meters Power Analyzers

Power quality analysis
Power measurement

New Products Information



AC/DC CURRENT SENSOR

CT7812 (AC/DC 2 A)

CT7822 (AC/DC 20 A)

Visualizing Energy Loss with Multipoint Current Consumption Measurement



To reduce EV energy loss and extend driving range, it's necessary to make high-accuracy measurements. This ensures that non-drivetrain energy is also used efficiently.

By combining the Hioki Memory HiLogger LR8450 with a current module and AC/DC current sensor, you can measure and record current at multiple points. Analyzing data accurately is key to reducing energy consumption.



RESISTANCE METER

RM3545A-1, RM3545A-2

New Heights in 100% Inspection

Market leading precision tests for testing every weld or connection on your production line.



As society embraces electric mobility, manufacturers are offering batteries, motors, electronic components, and other parts that accommodate increasingly large currents and high voltages. Since even minuscule amounts of resistance can have a significant impact on energy efficiency and safety, more accurate quality control focusing on resistance is required.

The Resistance Meter RM3545A makes it easy for anyone to measure resistance with a high degree of precision. It can be used in a variety of applications, including in development and on production lines.



DATA LOGGER

LR8101, LR8102

A data logger that's ideal for capturing data from high-voltage battery pack cells



Measurement systems are being called upon to deliver sophisticated capabilities as efficient energy use and e-mobility technologies progress.

Hioki data loggers drive solutions that turn measurement system issues into advantages, for example by assuring the safety of high-voltage systems, accommodating enormous numbers of measurement channels, and realizing data compatibility with upstream systems.

Please visit our website to get the latest information.



<https://www.hioki.com/global>

Contents

HIOKI's Philosophy	P.2
About the Catalog	P.4
Ensuring Safe Operation of the Product	P.5
Category Index	P.6 - P.18

Category
Index

 Data Acquisition, Memory Recorders Data Loggers, Multichannel Loggers	P.19 -
--	--------

Recorders
Data Loggers

 Impedance Analyzers, LCR/Resistance Meters, Battery Testers, Super Megohm meters, DMM, Signal Generators/Calibrators	P.38 -
--	--------

LCR / Resistance
Meters

 Impulse/Surge Testers, Leakage Current Testers, Insulation Withstanding Testers, Protective Ground Testers	P.63 -
---	--------

Safety Testing

 Power Meters, Power Analyzers, Power Quality Analyzers, Power Loggers	P.70 -
--	--------

Power Meters

 Current Probes, Current Sensors	P.83 -
--	--------

Current Sensors

 PV Maintenance Testers, LAN Cable Tester	P.94 -
---	--------

PV maintenance
Telecommunication

 Magnetic Field, Temperature, Lux	P.96 -
---	--------

Environmental
Measuring

 Digital Multimeters (DMMs) Testers	P.98 -
 Insulation Testers, Clamp Meters, Ground Resistance Testers, Phase Rotation Meters, Voltage Detectors	P.103 -

DMM/Testers
Field Measuring

 IoT Solutions	P.118 -
---	---------

IoT Solutions

 ATE (Automatic Test Equipment) Bare Board & Package Testing, Populated Board Testing	P.120 -
---	---------

Bare Board &
Package Testing

■ Model No. (Order Code) Index	P.129 -
■ Product Warranties	P.136
■ Repair and calibration service	P.137
■ JCSS and JCSS Calibration	P.137

Model No.
Index / Other

Harnessing the creativity of each and every employee to benefit society:

Our unchanging philosophy and vision for the future



Transforming People Value into Corporate Value

Hioki Philosophy

Hioki's corporate philosophy, established in 1986, embodies its views on management since its founding.

Since then, we have always followed this philosophy.

We will further accelerate Hioki's philosophy-driven management in our quest to realize Vision 2030.

HIOKI

The HIOKI logo

The "O" is not a simple circle but an oval. It symbolizes Earth embracing an egg of creation, nurturing people as it brings forth new things and contributes to the development of society.

Respect for Humanity

Hioki will build a free and open environment where employees can maximize their potential and abilities. Our aim is to foster the creativity and individuality of all persons and help them become the best version of themselves. To ensure that personal development is the driving force behind Hioki's evolution and achieve lasting growth and development, management demonstrates "Respect for Humanity" to achieve a high degree of harmony between individual potential and organizational goals.

Contribution to Society

As a manufacturer, Hioki contributes to the security and advancement of society and the happiness of people by providing high-quality products and unparalleled services.

As a member of the communities we serve, we work actively to support the development of local youth and protect the local environment to make an educational, cultural, and environmental contribution.

Vision 2030

By creating value beyond "measurement," we aim to continue making advances in measurement as an industry front-runner and become a solution creator that builds a sustainable society together with customers worldwide. To this end, we will encourage the organic cohesion of our organization.

Individual purposes

Hioki has continuously grown as a company of people who share its corporate philosophy. We respect our employees' individual sense of purpose (their will to "do, achieve, challenge, and contribute") and will create environments and frameworks that enable them to do so.

DX (Digital transformation) / GX (Green transformation)

We engage in DX initiatives to create new value through digital technology with a focus on two areas: internal information systems and product services. Hioki's business foundation is grounded on the basic principle of balancing environmental protection, which we have been working on for many years, with industrial development. This is highly compatible with Japan's recent green transformation (GX) trend (switching to energy from clean sources as opposed to that from fossil fuel) as it contributes to carbon neutrality and economic growth.

A world centered on electrical energy: Resolving social issues through electrical measurement

The modern society in which we live was built on the consumption of large volumes of energy, and various types of energy have been converted and utilized according to each situation. We expect demand for energy conversion to continue growing in the future.

To date, our major energy source has been "chemical energy," mainly in the form of fossil fuels. Engines that burn fossil fuels and convert chemical energy into "thermal energy" and then into "mechanical energy" are a typical example. Amid the recent trend toward decarbonization, the world is demanding a shift from fossil fuels to alternative energy sources. Electrical energy is at the center of this shift.

With solar power generation, "photon energy" in the form of sunlight is converted into electrical energy. We also have "mechanical energy" in the form of wind and hydro power that is converted into "electrical energy" using generators, as well as "chemical energy" that is stored and used in the form of batteries or hydrogen. Each household uses its own type of electrical energy by converting various types of energy to electricity. As we will discuss later, Hioki's measuring instruments are connected to all these energy types.

We will continue developing new energy-related solutions.



Contributing to local communities

Local Afforestation program

Every year since 1995, Hioki has donated seedlings to local schools and public facilities as part of its Local Afforestation program, which seeks to create a green environment by providing an opportunity for employees and local residents to plant trees together. To date, a total of 78,300 seedlings have been planted at 43 locations in Japan under the program, which also contributes to local environmental protection and carbon dioxide absorption and capture.



Acceptance of interns

The typical internship at a Japanese company lasts about one week, but Hioki accepts technical college student interns for a minimum of one month and for up to four months. With participants involved in actual development, the program is practical in nature. It is not aimed primarily at future hiring but rather to help match interns with local companies.



How we are connected with each type of energy

In this section, we introduce each type of energy, with a focus on electrical energy, and its connection to Hioki.

Mechanical energy

In this case, a motor is used to convert electrical energy into mechanical energy, and an inverter is used to control the conversion. More recently, the latest power semiconductors, such as silicon carbide (SiC) and gallium nitride (GaN), are being used to ensure effective energy utilization. As the measurement for such new devices becomes more difficult, we meet market demands by providing broadband current sensors and other advanced measurement technologies.



Photon energy

Here, photon energy (energy from light) is converted to direct-current (DC) power using solar panels. In most cases, a photovoltaic inverter (power conversion system or PCS) then converts it to alternating-current (AC) power for public utilization. To ensure the effective use of this limited energy, Hioki provides high-performance power measurement technologies to its customers. These customers use Hioki's measurement instruments for power development and production in fields that require ever-higher levels of voltage and power conversion efficiency.



Thermal energy

All energy types are eventually lost as they are converted into thermal energy (heat). Therefore, thermal management is important for the effective use of all energy. This requires technology to simultaneously measure, integrate, and analyze all types of energy conversion, not just electricity. In addition, the world is rapidly transitioning its heating and cooling systems from furnaces to heat pumps.



Chemical energy

Since electrical energy cannot be stored and carried in its original form, it needs to be converted to chemical energy forms, such as batteries and hydrogen, for storage and transport. Demand for batteries is expected to continue increasing. Furthermore, we anticipate significant investments in R&D on converting electricity to hydrogen and from hydrogen back to electricity. Hioki's products are also active in this area of chemical energy.



Scholarships for science and engineering students

The "Hioki Scholarship and Greening Foundation" provides scholarships (non-repayable monetary award, usually four years) to students who have graduated from high schools in Nagano Prefecture and are entering college science or engineering departments. In addition, the scholarship continues two more years for those who move on to graduate school.

Support for Little League

In 1991, we established the Ueda Minami League, a little league youth baseball team with the Company's property as its home ground, to deepen interaction with local communities through the sound development of young people. The team teaches basic behaviors, such as manners and teamwork, and encourages the youths to develop dreams and acquire people skills.



About the Catalog

- This catalog is organized by product group. Search for products using the field-based (category-based) index on the first page. Products have been grouped using general names by principal application.

- A list of all available products can be found at the end of the catalog.

The list is organized by product model and encompasses all products, including options.

Options

Individual product pages include dedicated options. Options that are used by entire product groups are introduced together under the corresponding product group. For option specifications and other detailed information, please see the catalog for the product in question.

Dimensions and mass

Exterior dimensions exclude protrusions, and are given in order of width(W), height(H), and depth(D), in mm units. Indicated weight represents an approximation of the mass of the main unit only, not including case, accessories, etc.

Battery labeling

Battery labeling complies with IEC international standards and includes R03 (AA), R03 (AAA), 6F22 (9 V), LR6 (AA alkaline), LR03 (AAA alkaline), and CR2032 (button-cell lithium).

About the marks



Products that were released within 1 year from the publication date of this catalog.



Products labeled as having a three-year warranty are covered for a period of three years from the date of purchase (or if the date of purchase is unknown, a period of three years from the date of manufacture). Accuracy is guaranteed for the duration of the separately indicated guaranteed accuracy period.



Use only when the measurement object is an insulated conductor.



True RMS measuring capability for accurate measurement of even distorted waveforms.



*Android, Google Play and the Google Play logo are trademarks of Google Inc.

*Cisco is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.

*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.

*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.


*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

*The Bluetooth® word mark and logo are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.

*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioke website.

■ LAN/GP-IB/RS-232C/USB₁/USB₂

Bluetooth® Supported interfaces



Trademark of SD-JC, LLC

Rectification Methods: True RMS and Mean

There are two methods for converting current into RMS values: the true RMS method (true RMS value indication) and the mean method (mean rectification RMS value indication). Although both methods yield the same value for undistorted sine waves, distortion of the waveform causes the values to diverge.

True RMS RMS value method (true RMS value indication)


The waveform including harmonic components is calculated according to an RMS calculation formula and displayed.

MEAN Mean method (mean rectification RMS value indication)

The input waveform is treated as an undistorted sine wave (single frequency only). The AC signal mean is calculated, converted to an RMS value, and displayed. The measurement error increases when the waveform is distorted.

Widespread use of equipment such as inverter devices and switching power supplies has made it more common for current waveforms being measured to be distorted. It is recommended to use a measuring instrument that uses the true RMS method to ensure accurate measurement.

Comparing distorted current values from an inverter, etc.



Current waveform from an inverter (primary side)

- 376 -

Mean-type clamp ammeter

~ 6.35 -

True RMS clamp ammeter

Accuracy and tolerances

f.s. (maximum display, or length of scale, ... full-scale)

Signifies the maximum display (scale) value or the length of the scale (in cases where the scale consists of unequal increments or where the maximum value cannot be defined). In general, this is the range value (the value written on the range selector, or equivalent) currently in use. However, be aware that in cases where the maximum display value is 2000V but the range value is only 600V, the maximum display value (scale value) is still used as the f.s. value.



300V range

rdg (displayed or indicated value, ... reading value)


This signifies the value actually being measured, i.e., the value that is currently indicated or displayed by the measuring instrument.



Measuring 100 V using the 300 V range

dgt (digital resolution, ... digit)

Signifies the smallest display unit on a digital measuring instrument, i.e., the value displayed when the last digit on the digital display is "1". Essentially, this indicates an error of 1 digit (based on decimal processing in analog-to-digital conversion), but in actuality this is the digit error combined with the f.s. error converted to a fraction of a digit unit. The accuracy associated with a particular measured value as shown in the product specifications is derived from these values.



In the 300 V range, the 0.1 V digit is the smallest digit

Example accuracy calculations

[Example accuracy calculation 1] (when the accuracy notation contains rdg and dg)

Accuracy specification: ±1.0% rdg ±3 dg
Measurement range: 300.0 V
Measured value: 100.0 V

Since the value being measured is 100.0 V:

- (A) Reading error (±% rdg): ±1.0% of 100.0 V = ±1.0 V
(B) Digit error (dg): Since the maximum resolution is 0.1 V, ±3 dg = ±0.3 V
(C) Total error (A+B): ±1.3 V
Based on the total error (C), the error boundary values for a measured value of 100.0 V would be **98.7 V to 101.3 V**.

[Example accuracy calculation 2] (when the accuracy notation contains rdg and f.s.)

Accuracy specification: ±0.2% rdg ±0.1% f.s.
Measurement range: 300.00 V
Measured value: 100.00 V

Since the value being measured is 100.00 V:

- (A) Reading error (±% rdg): ±0.2% of 100.00 V = ±0.20 V
(B) Full-scale error (±% f.s.): ±0.1% of 300.00 V = ±0.30 V
(C) Total error (A+B): ±0.50 V
Based on the total error (C), the error boundary values for a measured value of 100.00 V would be **99.50 V to 100.50 V**.

This Electrical Measuring Instruments General Catalog provides a product outline. For more detailed information, please refer to individual product catalogs and series catalogs, which group together similar products.

Ensuring Safe Operation of the Product

To help you use measuring instruments safely, the following information is provided in each product's Instruction Manual under "Specifications":


- Rated voltage to ground: The measurement point's voltage level relative to ground, Measurement Category, Anticipated transient overvoltage, etc.
- Location for use: Pollution Degree 2, indoor, altitude no more than 2000 m, etc.

Measurement Category

Under safety standards (EN61010 Series, JIS C 1010 Series), measurement is classified into Categories II to IV according to the measurement point's rated voltage to ground, current capacity (size of current that flows in a short-circuit fault), etc., and the transient overvoltage that occurs at the measurement point.

- **Category II**: Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.
- **Category III**: Measurement at a point on the power distribution cabling or power supply circuits, or at a point from the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.
- **Category IV**: Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.

The measurement instrument's Category is marked as "CAT II", "CAT III" or "CAT IV" near the measurement terminals.

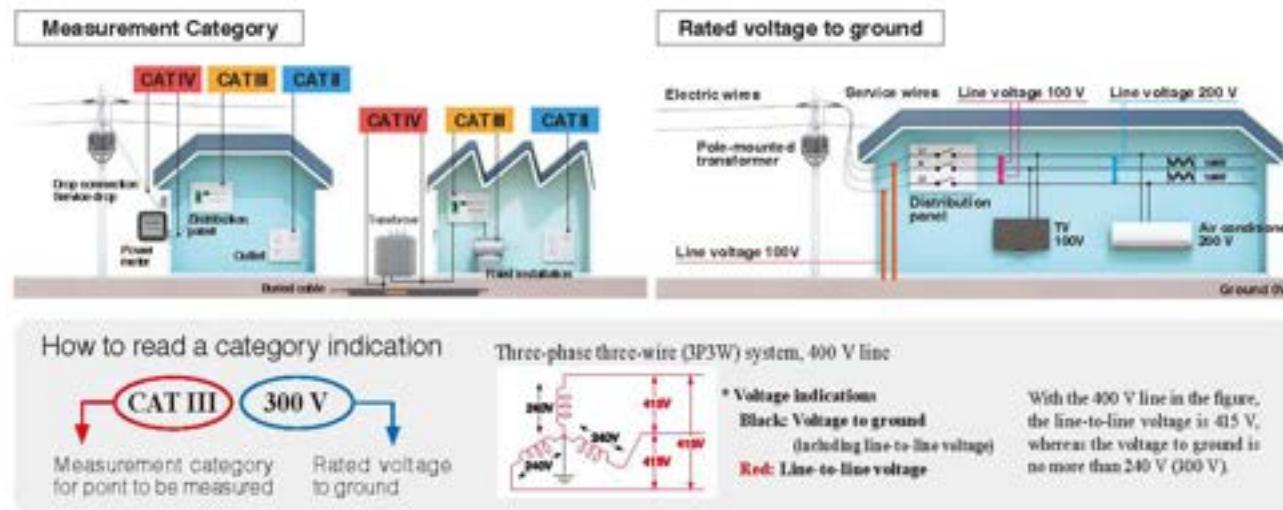

Never measure a measurement point with a higher category number than the category indicated on the measuring instrument. Doing so could lead to a serious accident such as electric shock.

Anticipated Transient Overvoltage

Power lines in factories and similar facilities will at times include transient overvoltage (impulse voltage) that is around 10 times the power source voltage. The transient overvoltage of the measurement points must be predicted in advance, and the instrument will need a safety design that will enable it to withstand such overvoltage.

Safety standards stipulate values such as the following for transient overvoltage, according to the voltage to ground and the measurement category.

Rated voltage to ground [V]	Transient overvoltage [V]		
	CAT II	CAT III	CAT IV
300	2500	4000	6000
600	4000	6000	8000
1000	6000	8000	12000
1500	8000	10000	15000
2000	12000	15000	18000

Pollution Degrees

If contaminants adhere to the surfaces of a measuring instrument, its insulation performance will fall and it will pose a high risk of electric shock. Safety standards classify environments where measuring instruments are used into Pollution Degrees 1 to 4.

- **Pollution Degree 1**: Environment with no pollution, or with only dry contaminants present (non-conductive dirt, dust, etc.), which will not affect a measuring instrument's insulation performance.
- **Pollution Degree 2**: Environment with only dry contaminants present (non-conductive dirt, dust, etc.), but where condensation could form on a measuring instrument, in which case the contaminants could cause a temporary drop in its insulation performance.
- **Pollution Degree 3**: Environment with conductive contaminants present (water, soil, etc.), and which therefore could affect a measuring instrument's insulation performance, depending on how much contaminant adheres to it. Or, environment with high humidity, where even non-conductive contaminants could be a problem, since due to condensation a measuring instrument could have wet surfaces for relatively long periods.
- **Pollution Degree 4**: Environment that could cause a prolonged drop in a measuring instrument's insulation performance, due to conductive contaminants (water, soil and the like) adhering to its surfaces, or to being wetted by rain.

A "Pollution Degree 2" marking on a measurement instrument means that it can be used without detriment to safety in environments of Pollution Degree 1 or 2 described above, and a "Pollution Degree 3" marking means the measurement instrument can be used in environments of Pollution Degrees 1 to 3.

Altitude

As altitude (elevation) rises, the air pressure decreases and flashover (breakdown and discharge through the air) becomes more likely to occur. Accordingly, safety standards stipulate safety design that assumes use locations of altitude no more than 2000 m for measuring instruments.

If measuring instruments are used in locations of altitude exceeding 2000 m, the spaces between their parts that are under hazardous voltage and their parts that humans touch should be made larger as a precaution.

Data Acquisition, Recorder, Data Logger Index

Portable Recorders for
Servicing and Maintenance

Simultaneously Capture Multiple
Signals at High Speeds

Monitor Anomalies in the Power Line



Non-contact AC Voltage Testing Non-contact CAN sensors

NON-CONTACT CAN SENSOR
SP7001, SP7002



- Supports φ1.2mm to 2.0mm covered wires
- No modification of vehicle cables
- No impact on the CAN bus or ECUs
- Accurate, reliable signal capture

.....p.23

Recorder Peripherals



- Connection cord
- PC card
- Logic probe
- Clamp on probe, etc

.....p.25-p.27

PC Software for Data Management

MR6000 Viewer



- For Memory Hi-Logger MR8600, Available for download free of charge from Hioki's website.

.....p.27

WAVE PROCESSOR
9335



- For Memory Hi-Logger
- Convert data, print and display waveforms

.....p.27

LAN COMMUNICATOR
9333



- For Memory Hi-Logger
- For data collection and remote control

.....p.27

Data Acquisition, Recorder, Data Logger Index

Category
Index

Multi-Channel Recorders

MEMORY HICORDER
MR6000 (16ch)Instantaneous waveform/
Long term recording
..... p.19MEMORY HICORDER
MR8741 (16ch)Systems Integration
..... p.22MEMORY HICORDER
MR8827 (32ch)Instantaneous waveform/
RMS value recording
..... p.21MEMORY HICORDER
MR8740 (54ch)Ideal for rack-mounting
..... p.22MEMORY HICORDER
MR8740T (108ch)Ideal for rack-mounting
..... p.22MEMORY HICORDER
MR8875 (16ch)Instantaneous waveform/
Temperature/Pulse
measurement
..... p.20MEMORY HICORDER
MR6000 (32ch)Instantaneous waveform/
Long term recording
..... p.19MEMORY HICORDER
MR6000 (Logic 128ch)Instantaneous waveform/
Long term recording
..... p.19DATA LOGGER LR8102
VOLTAGE/TEMP MODULE
(3000ch)

Temperature, Voltage and More

MEMORY HICORDER
LR8450 (20ch)DC/Pulse measurement
..... p.32MEMORY HICORDER
LR8450-01 (55ch)DC/Pulse measurement
..... p.32DATA LOGGER LR8101
VOLTAGE/TEMP MODULE
(150ch)DC/Temperature mea-
surement
..... p.34MEMORY HICORDER
LR8450-01 (350ch)
DC/Temperature mea-
surement
..... p.34WIRELESS LOGGING STATION
LR8410 (15ch)DC/Temperature/Pulse
measurement
..... p.31MEMORY HICORDER
MR8875 (80ch)Temperature measurement
..... p.20MEMORY HICORDER
LR8450 (120ch)DC/Temperature/Pulse
measurement
..... p.32WIRELESS LOGGING STATION
LR8410 (105ch)DC/Temperature mea-
surement
..... p.31

16ch

32ch

60ch

64ch

120ch

150ch

...3000ch

Number of channels

Other compatible software (third party)

FlexPro



- Powerful data analysis and presentation software for importing and organizing data from the MEMORY HICORDER Series
- From Weising GmbH (Germany)

p.27

Data Logger, Data Acquisition Index

Monitor Power Demand and Equipment Efficiency

CLAMP ON POWER LOGGER PW3365



- Designed for 50/60 Hz commercial line use
- 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
- Save data to SD card continuously
- (Current) Clamp input
- (Voltage) Non-invasive contact sensor

p.80

CLAMP ON POWER LOGGER PW3360



- Designed for 50/60 Hz commercial line use
- 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
- Save data to SD card continuously
- Clamp input
- Harmonic analysis

p.81

p.80

Compact Temperature or Humidity Loggers

WIRELESS FUNGAL LOGGER LR8520



- Record fungal index, growth prediction, temperature and humidity
- Minimum 0.5 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ch
- Alarm output
- Three-way power

p.28

WIRELESS VOLTAGE/TEMP LOGGER LR8515



- 1 ch Voltage ($\pm 30 \text{ mV}$ to $\pm 5 \text{ V}$) Thermocouple recording
- Minimum 0.1 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ch
- Three-way power

p.28

WIRELESS HUMIDITY LOGGER LR8514



- 2 ch Temperature / 2 ch Humidity recording
- -40 to 80 °C / 0 to 100 % RH (with optional sensor)
- Minimum 0.5 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ch
- Three-way power

p.29

TEMPERATURE LOGGER LR5011



- 1 ch Temperature recording
- -40 to 80 °C / 0 to 100 % RH (with optional sensor)
- Fastest 1 sec interval
- 60000 data × 1ch memory
- Dry cell battery operation
- IP54 (splash-proof)

p.37

HUMIDITY LOGGER LR5001



- 2 ch Temperature / Humidity alternating recording
- -40 to 80 °C / 0 to 100 % RH (with LR5004 sensor)
- Fastest 1 sec interval
- 60000 data × 2ch memory
- Dry cell battery operation
- IP54 (splash-proof)

p.37

Peripherals for Compact Loggers

DATA COLLECTOR LR6092



LR6092

COMMUNICATION ADAPTER LR5091

p.35

Pulse integration (flow rate, vehicle speed, etc.)

WIRELESS PULSE LOGGER LR8512



- 1 ch Pulse (frequency/no. of revolutions) recording
- Fastest 0.1 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ch
- Three-way power

p.30

Compact Current Loggers

WIRELESS CLAMP LOGGER LR8513



- AC/DC load current recording
- 2ch, Clamp-on sensor input
- Fastest 0.5 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ch
- Three-way power

p.29

Compact DC Voltage Loggers

WIRELESS VOLTAGE/TEMP LOGGER LR8515



- 2 ch Voltage ($\pm 30 \text{ mV}$ to $\pm 5 \text{ V}$) Thermocouple recording
- Minimum 0.1 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ch
- Three-way power

p.28

VOLTAGE LOGGER LR6041, LR6042, LR6043



- 1 ch DC voltage recording
- LR6041: ±5 mV DC
- LR6042: ±5V DC
- LR6043: ±50V DC
- Minimum 1 sec interval
- 60000 data × 1ch memory
- Dry cell battery operation
- IP54 (splash-proof)

p.36

Instrumentation recording

INSTRUMENTATION LOGGER LR5031



- 1 ch 0 to 20mA recording
- Minimum 1 sec interval
- 60000 data × 1ch memory
- Dry cell battery operation
- IP54 (splash-proof)

p.36

For analysis of LIB electrode slurries

Slurry Analytical System



- Impedance measurement and analysis of LiFe electrode slurries
- Analysis Results "DCR, Ratio, Uniformity" indicate electron conductivity of Slurry

p.51

For evaluation of LIB electrode sheets

ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610



- Isolates and quantifies contact layer resistance and interface resistance in positive- and negative-electrode sheets used in lithium-ion batteries

p.51

Battery Testing

BATTERY INSULATION TESTER BT5525



- Ideal for insulation resistance testing before battery electrolyte filling
- Detecting microscale insulation on defects caused by contamination (Break Down Detect function)
- Test voltage: 500V max.
- Insulation resistance test up to 999 MΩ
- Contact check

p.69

BATTERY TESTER BT3561A



- Compact power cells
- Compact pads up to 60 V
- AC 4-terminal method
- Resistance measurement: 0 Ω to 3.1 kΩ (maximum resolution: 1 μΩ)
- Voltage measurement: 0 V to ±60 V DC (maximum resolution: 10 μV)

p.53

BATTERY TESTER BT3562A



- Large pads for 12V
- Medium-size pads up to 100 V
- AC 4-terminal method
- Resistance measurement: 0 Ω to 3.1 kΩ (maximum resolution: 0.1 μΩ)
- Voltage measurement: 0 V to ±300 V DC (maximum resolution: 10 μV)

p.53

BATTERY TESTER BT3563A



- Large pads for 12V
- Large pads up to 300 V
- AC 4-terminal method
- Resistance measurement: 0 Ω to 3.1 kΩ (maximum resolution: 0.1 μΩ)
- Voltage measurement: 0 V to ±300 V DC (maximum resolution: 10 μV)

p.54

BATTERY TESTER BT3554-50



- Diagnose deterioration and health of UPS, compact and large lead-acid batteries
- Testing source: AC 1kVA
- finest resolution: 1 μΩ
- Compatible with Wireless Adapter Z3210

p.55

Impedance, Inductance and Capacitance in Research and Development and During Component Production



- Z, L, C, R testing
- Testing source frequency: 1 MHz to 3 GHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.38



- Z, L, C, R testing
- Testing source frequency: 1 MHz to 1.3 GHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.39



- Z, L, C, R testing
- Testing source frequency: 1 MHz to 600 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.39



- Z, L, C, R testing
- Testing source frequency: 100 kHz to 300 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.40



- Z, L, C, R testing
- Testing source frequency: 1 MHz to 300 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.40



- Z, L, C, R, σ (conductivity), ϵ (dielectric constant) testing
- Battery measurement
- Testing source frequency: 1 nHz to 200 kHz
- Measuring time: 2 ms

p.41



- Z, L, C, R testing
- Testing source frequency: 4 Hz to 5 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.42

Impedance, Inductance and Capacitance Testing During Component Production

LCR METER
IM353-6

- Z, L, C, R testing
- Testing source frequency: DC, or 4 Hz to 8 MHz
- Measuring time: 1 ms
- Accuracy guaranteed range from 1 mΩ
- Continuous testing under varying conditions

p.43

LCR METER
IM3533

- Z, L, C, R testing
- Testing source frequency: 1 nHz to 200 kHz
- Measuring time: 2 ms
- Transformer measurement mode
- Frequency sweep measurement: (IM3533-1)

p.44

LCR METER
IM3523, IM3523A

- Z, L, C, R testing
- Testing source frequency: 40 Hz to 200 kHz
- Measuring time: 2 ms
- IM3523A: USB and LAN as standard

p.43

C METER
3506-10

- C, D, Q, low capacitance testing
- Testing source frequency: 1 kHz, 1 MHz
- Measuring time: 1.5 ms (1 MHz)
- RS-232C, GPIB

p.44

C HITEMSTER
3504

- C, D, large capacitance MLCC testing
- Testing source frequency: 120 Hz or 1 kHz
- Measuring time: 2 ms
- RS-232C standard (384-5) EDN factor, GP-IB (384-6) EDN factor, Contact check, GP-IB

p.45

EQUIVALENT CIRCUIT ANALYSIS
FRMWARE IM9000

- Optional software built in to the IM3570
- Equivalent circuit models
- Enables displaying the ideal frequency characteristics graph derived from the analysis results
- Cole-Cole plot, Admittance circle display

p.42

DC Resistance Testing

RESISTANCE METER
RM3548

- High-precision portable resistance meter measures from $\mu\Omega$ to $M\Omega$
- Testing source current: DC, 1 A max.
- Display refresh rate: approx. 100 ms
- Fine resolution: 0.1 $\mu\Omega$

p.45

RESISTANCE METER
RM3545A

- Market-leading precision tests for testing every weld or connection on your production line
- 1000 $\mu\Omega$ to 1000 $M\Omega$ range
- Multi-point measurement: 20 locations
- Fast resolution: 1 $\mu\Omega$
- Testing source current: DC, 1 A max.

p.47

RESISTANCE METER
RM3545

- Features super-high accuracy and multi-channel capability
- Testing source: DC, 1 A max.
- Faster measurement speed: 2 ms
- Fast resolution: 1 $\mu\Omega$
- Multi-point measurement: 20 locations

p.48

RESISTANCE METER
RM3544

- High-precision bench-top resistance meter for both manual operation and integration with automatic lines
- Testing source: DC, 300 mA Max.
- Fast measurement speed: 15 ms
- Fast resolution: 1 $\mu\Omega$

p.49

RESISTANCE HITEMSTER
RM3543

- Advanced enough to measure 0.1 $m\Omega$ sheets with room to spare
- Meets high precision & high resolution for automated lines
- Testing source: DC, 300 mA Max.
- Minimum integration time: 0.1 ms
- Fast resolution: 0.01 $\mu\Omega$

p.49

RESISTANCE METER
RM3542A, RM3542

- High-precision resistance meter for automated lines
- Compatible with super small electronic components (SMDs)
- Testing source: DC, 100 mA max.
- Fast measurement time: 0.9 ms
- Minimum integration time: 0.1 ms
- Fast resolution: 0.1 $\mu\Omega$

p.50

Probes and Test Fixtures



- Probes and test fixtures for lead components
- Test fixtures for SMDs
- DUT size reference table included

p.46

Battery Testing

BATTERY CELL VOLTAGE GENERATOR
SS7081-50

- Easy build a BMS evaluation environment
- Power supply, electronic load, DMM function integrated into one (12 channels)
- Generated voltage: 5V / dc

p.52

SWITCH MAINFRAME
SW1001, SW1002

- Pair with a measuring instrument to achieve multi-channel capability
- SW1001: max. 68 channels (2-wire) to max. 18 channels (4-terminal pair)
- SW1002: max. 344 channels (2-wire) to max. 72 channels (4-terminal pair)

p.52

PRECISION DC VOLTMETER
DM7275, DM7276

- DCV only
- Measure DC voltage and temperature simultaneously
- 1:12 digit resolution
- 1-year 20 ppm Accuracy (DM7275)
- 1-year 3 ppm Accuracy (DM7276)
- Built-in EXT IO, LAN, and USB

p.61

BATTERY HITEMSTER
BT3564

- EV and PHEV battery pack testing
- Testing source: AC 1 kHz
- Measure voltage up to: 1000 V
- Measurement time: 728 ms
- Fast resolution: 0.1 $\mu\Omega$ and 10 μV

p.54

BATTERY HITEMSTER
BT3562-01, BT3563-01

- The perfect battery tester for production lines
- Testing source: AC 1 kHz
- Max. voltage: 60 V DC (BT3562-01)
- 300 V DC (BT3563-01)
- Measurement time: 180 ms
- Fast resolution: 0.1 $\mu\Omega$ and 10 μV

p.55

BATTERY HITEMSTER
3561

- The perfect battery tester for small secondary batteries
- Testing source: AC 1 kHz
- Measurement time: 1 ms
- Fast resolution: 0.01 $\mu\Omega$

p.55

BATTERY IMPEDANCE METER
BT4560

- For Li-ion battery testing
- Low-frequency AC-DC method without charge and discharge
- R, X, Z, E measurement
- Testing source: 0.1 A rms
- Measuring range at least 3 mΩ
- DCV measurement with 10 μV resolution

p.56

Super Insulation Testing of Capacitors

SUPER MQ HITESTER SM7810 POWER SOURCE UNIT SM7860 series SUPER MEGOHM METER SM7420 SUPER MEGOHM METER SM7110, SM7120



- For testing leakage current in MLCC
- 6.8ms measurement speed over 8ch simultaneously
- Testing current is applied externally
- Resistance measurement: Max. $1 \times 10^9 \Omega$
- Current measurement: 1pA to 1mA



- Specially designed power source unit for SM710
- Supports multi-channel system and provides functions required for MLCC test lines
- 50 mA per channel output

p.58



- Fastest speed of 6.4 ms
- 4ch
- Dedicated ultra-current measurement (can of generate or measure voltage)
- Max. $2 \times 10^9 \Omega$ display
- Min. 0.1 fA resolution

p.59

Peripherals

SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001



- Simple and Convenient
- Surface/Volume Resistance Measurement ($\geq 10^6 \Omega$, 100V)
- Measure surface and volume resistance of metal sheets without need to cut samples

Testing terminals for super megohm measurement



- For flat plate testing
- For surface resistance testing
- For liquid testing
- Screen box
- Comparing resistance box

p.60

System Integrated Digital Multi-Module Stations

DMM STATION U8991+ MR8740T



- Store entire data from 108 units of DMM in single operation
- Simultaneous 108 ch sampling without signal scanner
- High ±0.02% precision & ultra high 6-1/2 digit resolution
- 50 times/sampling

p.61

DMM STATION MR8990+ MR8741



- Store entire data from 16 units of DMM in single operation
- Simultaneous 16 ch sampling without signal scanner
- High ±0.01% precision & ultra high 6-1/2 digit resolution
- 500 times/sampling

p.61

DMM STATION MR8990+ MR8740



- Store entire data from 54 units of DMM in single operation
- Simultaneous 32 ch sampling without signal scanner
- High ±0.01% precision & ultra high 6-1/2 digit resolution
- 500 times/sampling

p.61

Benchtop Multimeters for Production and Inspection Lines

PRECISION DC VOMETER DM7275, DM7278



- DCV only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 99ppm Accuracy (DM7275)
- 1-year 20ppm Accuracy (DM7278)
- Built-in EXT IO, LAN, and USB

p.61

Arbitrary Waveform Generation Recorders

VIR GENERATOR UNIT U8794+ MR8740T



- DC voltage output
- DC current output
- Resistance output (simulated resistance)
- 8ch

p.62

ARBITRARY WAVEFORM GENERATION RECORDER U8793+ MR8847A



- Max. 2 MHz D/A output
- Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- 2048-Sampling
- Max. 15V output
- Max. 16ch

p.62

ARBITRARY WAVEFORM GENERATION RECORDER U8793+ MR8827



- Max. 2 MHz D/A output
- Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- 2048-Sampling
- Max. 15V output
- Max. 16ch

p.62

ARBITRARY WAVEFORM GENERATION RECORDER U8793+ MR8741



- Max. 2 MHz D/A output
- Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- 2048-Sampling
- Max. 15V output
- Max. 16ch

p.62

ARBITRARY WAVEFORM GENERATION RECORDER U8793+ MR8740



- Max. 2 MHz D/A output
- Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- 2048-Sampling
- Max. 15V output
- Max. 16ch

p.62

Signal Generators and Calibrators

DC SIGNAL SOURCE SS7012



- DC constant voltage, current source
- ±25 V, ±25 mA
- Thermoelectric power generation, E, E, J, T, K, B, N thermocouple
- DC voltage, DC current measurement
- Battery operation

p.62

For Motor Winding Inspection

IMPULSE WINDING TESTER
ST4030A



- Diagnose winding quality and insulation while the rotor is assembled
- Identify single-turn faults
- Detect partial discharge with high accuracy
- Diagnose insulation failure between motor windings
- Output voltage up to 4200 V

..... p.63

DISCHARGE DETECTION
UPGRADE ST9000



- Optional function for ST4030A
- Detects microscopic partial discharges obscured by noise
- HD802 original filter

..... p.63

Insulation Resistance and Withstand Voltage Testing

AC AUTOMATIC INSULATION
WITHSTANDING VTESTER 3174



- Insulation resistance test up to 2000 MΩ
- Withstanding voltage test up to 5kV AC
- Contact check
- Full remote control

..... p.68

AUTOMATIC INSULATION
WITHSTANDING VTESTER 3153



- Insulation resistance test up to 9999 MΩ
- Withstanding voltage test up to 5kV AC/DC
- Full remote control

..... p.69

HIGH VOLTAGE SCANNER
3900



- Supports remote control
- For automatic multipoint testing of insulation / withstand voltage
- Use with 3153's program or with general-purpose logic expansion

..... p.69

PC Applications

SAFETY TEST DATA MANAGEMENT
SOFTWARE 9267



- PC-controlled application software

..... p.69

Leakage Current Testing in Equipment and Medical Devices

LEAK CURRENT VTESTER
ST5540



- Test biomedical- and general-use electrical devices
- Built-in support for all networks
- Support for rated currents of up to 20 A
- Support for automated testing in production lines, etc.

..... p.65

LEAK CURRENT VTESTER
ST5541



- Testing of general-use electrical devices
- Built-in support for networks other than medical-use electrical devices
- Support for rated currents of up to 20 A
- Support for automated testing in production lines, etc.

..... p.66

Insulation Resistance and Withstand Voltage Testing

BATTERY INSULATION TESTER
BT5525



- Ideal for insulation resistance testing before battery electrolyte filling
- Detecting microscale insulation defects caused by contamination (Break Down Detect function)
- Test voltage: 500 V max.
- Insulation resistance test: up to 9999 MΩ
- Contact check

..... p.67

INSULATION TESTER
ST5520



- Rapid 500V testing speed
- Test voltage: 1000V max.
- Insulation resistance test: up to 9999 MΩ
- Contact check

..... p.67

AC Ground Bond Testing

AC GROUNDING VTESTER
3157



- Protective ground tester indispensable for standard certification (low resistance measure)
- 0 to 1.5Ω measurement
- Testing current up to 31A

..... p.64

Power Measuring Instruments Index

Evaluate and Analyze the Power Efficiency of Motors, Equipment and other Energy Saving Devices

POWER ANALYZER PWB001



- Max. 16 ch power analysis by optical link
- Partial evaluation of equipment
- Wide-band DC to 100 kHz (7000)
- DC, or IP2W to 304W
- 4 ch current sensor input
- Motor drive equipment, analyze motors and high frequency reactors
- Analyze waveform without an oscilloscope

p.70

POWER ANALYZER PW6001



- Max. 12 ch by synchronizing via 6-channel mode
- Partial evaluation of equipment
- Wide-band DC, 0.1 Hz to 2 MHz
- DC, or IP2W to 304W
- 6 ch current sensor input
- Measure inverter equipment and analyze motors
- Analyze waveform without an oscilloscope

p.72


POWER ANALYZER PW3390



- Max. 12 ch by synchronizing eight 4-channel mode
- Partial evaluation of equipment
- Wide-band DC, 0.1 Hz to 200 kHz
- DC, or IP2W to 304W
- 4 ch current sensor input
- Measure inverter equipment and analyze motors

p.74

AC/DC CURRENT BOX PW9100A



- Direct current measurement option for PWB001/PW6001/PW3390
- Wide-band DC to 3.5 MHz, 50A AC/DC rated input, 0.04%V/A output
- PW9100A-3 : 3 channels
- PW9100A-4 : 4 channels

p.75

AC/DC HIGH VOLTAGE DIVIDER VT1005



- Voltage measurement option for PWB001/PW6001/PW3390
- Divides high voltage by 1000:1 and outputs
- Wide-band DC to 4 MHz
- Measurement Accuracy: ±0.08% (DC)
±0.04% (300 kHz)
±0.17% (20 kHz)

p.74

3-Phase Power Meters for Industrial Equipment Testing

POWER METER PW3337



- 3 ch input, DC, or IP2W to 304W
- Max. input 1000 V, 65 A.
- DC, or 0.1 Hz to 100 kHz
- ±0.1% basic accuracy
- Direct input or clamp input
- Direct input or clamp input

p.76

POWER METER PW3336



- 2 ch input, DC, or IP2W to 303W
- Max. input 1000 V, 65 A.
- DC, or 0.1 Hz to 100 kHz
- ±0.1% basic accuracy
- Direct input or clamp input
- Direct input or clamp input

p.76

POWER METER PW3335



- Ultra-sensitive stability power measurement
- Measure according to IEC 62301
- DC, or IP2W
- Max. input 300 V, 30 A
- DC, or 45 Hz to 5 kHz
- ±0.2% basic accuracy
- DC, or 0.1 Hz to 100 kHz
- ±0.1% basic accuracy
- Direct or clamp input

p.77

AC/DC POWER HITESTER 3334



- Compliant with the SEPCover® Benchmark
- DC, or IP2W
- Max. input 300 V, 30 A
- DC, or 45 Hz to 5 kHz
- ±0.2% basic accuracy
- Guaranteed accuracy of ±0.3% for 3 years
- Direct input only

p.78

POWER HITESTER 3333



- Space-saving footprint
- High accuracy of ±0.2%
- IP2W only
- Max. input 300 V, 30 A
- 45 Hz to 5 kHz
- Guaranteed accuracy of ±0.3% for 3 years
- Direct input only

p.78

Monitor and Record Power Quality

POWER QUALITY ANALYZER PQ3198



- IEC61000-4-30 Ed.3 Class A Power Quality Analyzer
- Monitor and record the quality of power
- IP2W to 304W, DC 50/60 400 Hz
- Clamp input
- Clamp input

p.79

POWER QUALITY ANALYZER PQ3100



- IEC61000-4-30 Ed.3 Class A Power Quality Analyzer
- Monitor and record the quality of power
- IP2W to 304W, DC 50/60 400 Hz
- Clamp input
- Clamp input

p.79

Monitor Energy Consumption and Analyze Energy Savings

CLAMP ON POWER LOGGER PW3365



- Designed for 50/60 Hz commercial line use
- 3 circuits (IP2W), single circuit (IP3W, IP2M, IP4W)
- Save data to the SD card continuously
- (Current) Clamp input
- (Voltage) Non-metallic contact sensor

p.80

CLAMP ON POWER LOGGER PW3360



- Designed for 50/60 Hz commercial line use
- 3 circuits (IP2W), single circuit (IP3W, IP2M, IP4W)
- Save data to the SD card continuously
- Clamp input
- Harmonic analysis

p.81

POWER LOGGER VIEWER SF1001



- Easy graphical processing of measurement data saved with the PW3360/3365 series
- 3169 series on a PC

p.82

Handheld Power Meter

AC CLAMP POWER METER CM3288-50



- Easy AC power clamps
- Single-phase, 3-phase (balanced condition/without distortion)
- Phase angle, power factor
- Voltage/current harmonics (with Z3210 installed)
- AC clamp, True RMS, Battery operation
- Compatible with Wireless Adapter Z3210

p.82

Non-contact CAN sensors

NON-CONTACT CAN SENSOR SP7001, SP7002



- Supports $\phi 1.2\text{mm}$ to 2.0mm core and wire
- No modification of vehicle cables
- No impact on the CAN bus or ECUs
- Accurate, reliable signal capture

p.23

Current Probes to Observe DC to MHz Bandwidth Waveforms on Oscilloscopes and Memory Recorders

CURRENT PROBE CT6710, CT6711



- Clearly observe signals with high S/N ratio and 10x output rate
- CT6710: DC to 50 MHz
- CT6711: DC to 120 MHz
- 30A rms max, 3 ranges
- $\phi 5\text{ mm}$ (0.20 in) Core dia.

p.80

CURRENT PROBE CT6700, CT6701



- CT6700: DC to 50 MHz
- CT6701: DC to 120 MHz
- 5 Amperes max.
- $\phi 5\text{ mm}$ (0.20 in) Core dia.

p.80

CLAMP ON PROBE 3273-50, 3276



- 3276: DC to 100 MHz
- 3273-50: DC to 50 MHz
- 30 Amperes max.
- $\phi 5\text{ mm}$ (0.20 in) Core dia.

p.84

CLAMP ON PROBE 3274, 3275



- 3275: DC to 2 MHz, 500 Amperes max.
- 3274: DC to 10 MHz, 150 Amperes max.
- $\phi 5\text{ mm}$ (0.20 in) Core dia.

p.84

Power Supplies for Current Probes

POWER SUPPLY 3269, 3272



- 3269: Power 2 x CT6710 series or 4 x CT6700, 3270 series
- 3272: Power 1 x CT6700, 3270 series

p.84

Current Probes/Clamp Sensors Index

Current Probes to Observe Waveforms Using Wide-Band Power Analyzers

AC/DC CURRENT SENSOR CT6904A



- Frequency bandwidth: CT6904A: DC to 4 MHz, 500 A AC/DC rated; Phase: DC to 1 MHz.
- Frequency bandwidth: CT6904A/2: DC to 4 MHz, 100 A AC/DC rated; Phase: DC to 1 MHz.
- Frequency bandwidth: CT6904A: Ø 22 mm (1.26 in) Core dia.

p. 85

AC/DC CURRENT SENSOR CT16873A, CT16875A, CT16877A



- Frequency bandwidth: CT16873A: Amplitude: DC to 1 MHz; 500 A AC/DC, Phase: DC to 1 MHz; Ø 24 mm (1.41 in) Core dia.
- Frequency bandwidth: CT16874A: Amplitude: DC to 1.5 MHz; 1000 A AC/DC, Phase: DC to 1 MHz; Ø 24 mm (1.41 in) Core dia.
- Frequency bandwidth: CT16877A: Amplitude: DC to 1 MHz; 2000 A AC/DC, Phase: DC to 700 kHz; Ø 24 mm (1.41 in) Core dia.

AC/DC CURRENT SENSOR CT16872, CT16873



- Frequency bandwidth: CT16872: Amplitude: DC to 10 MHz, 50 A AC/DC rated; Phase: DC to 1 MHz.
- Frequency bandwidth: CT16873: Amplitude: DC to 10 MHz, 200 A AC/DC rated; Phase: DC to 1 MHz; Ø 24 mm (1.41 in) Core dia.

p. 85

AC/DC CURRENT SENSOR CT16862, CT16863



- Frequency bandwidth: CT16862: Amplitude: DC to 1 MHz, 50 A AC/DC rated; Phase: DC to 100 kHz.
- Frequency bandwidth: CT16863: Amplitude: DC to 500 kHz; 200 A AC/DC rated; Phase: DC to 300 kHz; Ø 24 mm (1.41 in) Core dia.

p. 85

Current Probes to Observe Waveforms Using Wide-Band Power Analyzers

AC/DC CURRENT PROBE CT6844A, CT6845A, CT6846A



- Frequency bandwidth: CT6844A: DC to 500 kHz, 500 A AC/DC rated.
- Frequency bandwidth: CT6845A: DC to 200 kHz, 500 A AC/DC rated.
- Frequency bandwidth: CT6846A: DC to 100 kHz, 1000 A AC/DC rated.
- Core dia: CT6844-05: Ø 20 mm (0.79 in), CT6845-05: Ø 20 mm (0.79 in), CT6846-05: Ø 20 mm (0.79 in).

p. 87

AC/DC CURRENT PROBE CT6841A, CT6843A



- Frequency bandwidth: CT6841A: DC to 2 MHz, 20 A AC/DC rated.
- Frequency bandwidth: CT6843A: DC to 700 kHz, 200 A AC/DC rated.
- Ø 20 mm (0.79 in) Core dia.

p. 88

AC/DC CURRENT PROBE CT6830, CT6831



- Frequency bandwidth: CT6830: DC to 100 kHz, 2 A AC/DC rated.
- Frequency bandwidth: CT6831: DC to 100 kHz, 20 A AC/DC rated.
- Ø 5 mm (0.20 in) Core dia.

CLAMP-ON SENSOR 9272-05



- Frequency bandwidth: Amplitude: 3 Hz to 100 kHz; Phase: 5 Hz to 50 kHz.
- 20 A or 200 AAC rated.
- Ø 45 mm (1.81 in) Core dia.

Power Supplies for Current Probes

SENSOR UNIT CT9555, CT9556, CT9557



- Power supply for current sensors: CT9555: 1ch, with waveform output.
- CT9556: 1ch, with waveform/EMI output.
- CT9557: 4ch, with waveform/total waveform/total EMI output.

p. 88-89

AC/DC Current Input

AC/DC CURRENT BOX PW9100A



- Direct current measurement option for PW8000/PW9000/PW3000.
- Wide-band DC to 3.5 MHz, 50 A AC/DC rated input, 0.01%TA output.
- PW9000A-3: 3 channels
- PW9000A-4: 4 channels

p. 75

AC/DC Current Clamps

Terminal HIOKI PL14

AC/DC CURRENT SENSOR CT7812, CT7822



- Frequency bandwidth: CT7812: DC to 100 kHz, 2 A AC/DC rated.
- Frequency bandwidth: CT7822: DC to 100 kHz, 20 A AC/DC rated.
- Ø 5 mm (0.20 in) Core dia.

p. 89

AC/DC AUTO-ZERO CURRENT SENSOR CT7700 series



- DC to 50 Hz (-3dB)
- Rated current, core dia: CT7742: 2000 A AC/DC, Ø 55 mm (2.17 in) core dia.
- CT7756: 600 A AC/DC, Ø 33 mm (1.30 in) core dia.
- CT7758: 100 A AC/DC, Ø 33 mm (1.30 in) core dia.
- CT7759: 100 A AC/DC, Ø 33 mm (1.30 in) core dia.

p. 90

AC/DC CURRENT SENSOR CT7800 series



- DC to 100 kHz (-3dB)
- Rated current, core dia: CT7842: 2000 A, AC/DC, Ø 35 mm (1.37 in) core dia.
- CT7856: 600 A AC/DC, Ø 33 mm (1.30 in) core dia.
- CT7858: 100 A AC/DC, Ø 33 mm (1.30 in) core dia.

DISPLAY UNIT CM7290, CM7291



- Use with CT7800 series current sensors.
- DCA, ACA, (DC+AC), Frequency measurement.
- Power supply for single sensor.
- Built-in Bluetooth® wireless technology (CM7291).

AC Current Clamps

Terminal HIOKI PL14

AC CURRENT SENSOR CT17126, CT17191, CT17192



- Frequency band up to 20 kHz.
- 6000 A AC rated input.
- Ø 15 mm (0.59 in) Core dia.

p. 91

AC FLEXIBLE CURRENT SENSOR CT7040 series



- 10 Hz to 50 kHz (-3dB)
- 6000 A AC rated input.
- Loop diameters: CT7044: Ø 100 mm (3.94 in); CT7045: Ø 180 mm (7.09 in); CT7046: Ø 254 mm (10.0 in).

p. 91

AC Current Clamps

Terminal BNC

CLAMP-ON SENSOR 9695



- 40 Hz to 5 kHz
- Phase: 45 Hz to 5 kHz
- 50 A AC rated input
- Ø 15 mm (0.59 in) Core dia.
- 9695-02: Requires the 9219
- 100 A AC rated input
- Ø 55 mm (2.17 in) Core dia.

p. 93

CLAMP-ON SENSOR 9681, 9689



- 500 A AC rated input
- Ø 46 mm (1.81 in) Core dia.
- 40 Hz to 5 kHz
- Phase: 45 Hz to 5 kHz
- 1000 A AC rated input
- Ø 55 mm (2.17 in) Core dia.

p. 93

AC FLEXIBLE CURRENT SENSOR CT9867



- 10 Hz to 20 kHz (-3dB)
- 5000 A/500 A AC rated input
- Three types of core dia: Ø 100 mm (3.94 in) to Ø 254 mm (10.0 in)

p. 93

CLAMP-ON SENSOR 9660, 9694



- Frequency characteristics: Amplitude: 40 Hz to 5 kHz, Phase: 45 Hz to 5 kHz
- 300 A AC rated input
- Ø 15 mm (0.59 in) Core dia.
- 5 AAC rated input

p. 93

Leak Current Sensor Terminal HIOKI PL14



- Frequency band 40 Hz to 5 kHz
- 6 AAC rated input
- Ø 40 mm (1.57 in) Core dia.

p. 93

Leak Current Sensor Terminal BNC



- Use for leak measurement: 9132-50: AC 20 to 1000 A, Ø 15 mm (0.59 in) Core dia.
- 910-50: AC 20 to 500 A, Ø 15 mm (0.59 in) Core dia.
- Frequency characteristics: 9066-50: AC 10 to 500 A, Ø 46 mm (1.81 in) Core dia.

p. 93

Load Current Sensor Terminal BNC



- Use for load measurement: 9132-50: AC 20 to 1000 A, Ø 15 mm (0.59 in) Core dia.
- 9010-50: AC 20 to 500 A, Ø 15 mm (0.59 in) Core dia.
- Frequency characteristics: 9018-50: AC 10 to 500 A, Ø 46 mm (1.81 in) Core dia.

p. 93

**Communication Testing
for Electrical Construction**LAN CABLE TESTER
FT3685

- Use for installing LAN cables or repair maintenance
- Detect split pairs with wiring check
- Get NVP-balanced measurement
- Identify cable destinations

p.94

PV Maintenance TestersDI/PASS DIODE TESTER
FT4310

- Tester open or short-circuit bypass diodes even during the day
- Easily reading the strings in the junction boxes
- Automatically transfer data wirelessly via Bluetooth® wireless technology

p.95

INSULATION TESTER
IR4053

- Built-in dedicated PV function
- 600 V AC/ 1000 V DC
- 5 test voltage ranges from 50 to 1000 V
- Computer function
- Integrated hard carrying case

p.104

Magnetic Field TestingMAGNETIC FIELD TESTER
FT3470-52

- To measure as defined by IEC/EN 62233
- Compliance testing of household appliances
- Compliant to ICNIRP 2010 guidelines
- 10 Hz to 400 kHz
- Bundled with 100 cm² and 3 cm² sensors

p.96

MAGNETIC FIELD TESTER
FT3470-51

- To measure as defined by IEC/EN 62233
- Compliance testing of household appliances
- Compliant to ICNIRP 2010 guidelines
- 10 Hz to 400 kHz
- Bundled with 100 cm² sensor

p.96

Infrared ThermometersINFRARED THERMOMETER
FT3701

- Long-focus, precise-field type
- ± 100mm at a 3m distance
- -35.0 °C to 500.0 °C
- Measurement wavelength 8 to 14μm
- Two-beam laser pointer

INFRARED THERMOMETER
FT3700

- Long-focus type
- ± 83mm at a 1m distance
- -35.0 °C to 500.0 °C
- Measurement wavelength 8 to 14μm
- Two-beam laser pointer

p.96

Temperature MeasurementWIRELESS HUMIDITY LOGGER
LR8514, etc.

- Refer to the Wireless Logger series for temperature measurement

p.29

WIRELESS LOGGING STATION LRB410



- Refer to the Multi-channels Wireless Logger series for temperature measurement

p.31

Compact Data Logger
LR5000 Series**Heat Flow Testing**HEAT FLOW LOGGER
LR8432

- Refer to the LR5000 Data Logger series for temperature measurement

p.30

**Forecast Likelihood
of Fungal Growth**WIRELESS FUNGAL LOGGER
LR8520

- Record fungal index, growth prediction, temperature and humidity
- Minimum 0.5 sec interval
- Wireless data download to a tablet or computer
- 500,000 data ch.
- Alarm output
- Three-way power

p.28

**Illumination
Testing**LUX METER
FT3424, FT3425

- IEC 6102-7-1985 class II, IEC 61091-2006 general AA class compliant
- 0 to 200,000 lx
- User hold function
- Memory function
- Built-in Bluetooth® wireless technology (FT3425)

p.97

Digital Multimeter/Tester Index

Because the DMM offers a large number of measurement functions and ranges, only a representative value (maximum accuracy) for each range is included at the basic accuracy (due to space limitation). For more accuracy information for each range, please see the detailed catalog or user manual.

High-Precision Handheld DMM

DIGITAL MULTIMETER DT4282



- 60000 count display
- DC/AC Voltage measurement
- + Peak - Peak measurement
- Low-pass filter function
- 10 A Direct input
- USB communication (option)
- True RMS
- CAT IV 600 V

p. 98

p. 98

p. 99

DMM for on-site maintenance

DIGITAL MULTIMETER DT4281



- 60000 count display
- DC/AC Voltage measurement
- + Peak - Peak measurement
- Low-pass filter function
- AC Current measurement with Clamp-on probe
- USB communication (option)
- True RMS
- CAT IV 600 V

p. 98

p. 99

DIGITAL MULTIMETER DT4261



- 6000 count display
- DC/AC Voltage measurement
- + Peak - Peak measurement
- Low-pass filter function
- AC Current measurement with Clamp-on probe
- USB communication (option)
- True RMS
- CAT IV 600 V

p. 99

DMM for Electrical Work

DIGITAL MULTIMETER DT4255



- 6000 count display
- Current-measuring resistor fast blow fuse
- Low-pass filter function
- AC current measurement with clamp-on probe
- Voltage detector
- USB communication (option)
- True RMS
- CAT III 600 V
- CAT IV 600 V

p. 100

p. 101

DIGITAL MULTIMETER DT4223



- 6000 count display
- Protective function against accidental voltage input
- Low-pass filter function
- No current measurement
- Voltage detector
- True RMS
- CAT III 600 V
- CAT IV 600 V

p. 101

Field Measuring Instruments Index

5-Range Digital Meg-ohm Meters

INSULATION TESTER IR4053 HIGH VOLTAGE INSULATION TESTER IR5050, IR5051



- Built-in dedicated PV function
- 600 V AC/1000 V DC
- 5 test voltage ranges from 50 to 1000 V
- Capacitor function
- IP65 rated all-in-one storage and carrying case

p.104

5-Range Digital Meg-ohm Meters for Electrical Equipment Maintenance

INSULATION TESTER IR4057-50, IR4059



- 5 test voltage ranges from 50 to 1000 V
- High-speed measurement with bar graph
- Capacitor detection function
- 600 V AC/DC voltmeter
- Compatible with Wireless Adapter Z3210

p.103

INSULATION TESTER IR4056



- 5 test voltage ranges from 50 to 1000 V
- Capacitor function
- 600 V AC/DC meter
- 200 mA continuity check
- Integrated hard carrying case

p.104

3-Range Analog Meg-ohm Meters

ANALOG MD HITEMETER 3490



- 3 ranges
- 100/500/1000 V testing voltage
- 200 mA continuity (3 Ω resistance range)
- AC voltage measurement
- Bright LED, luminous scale
- Integrated hard carrying case

p.106

Single-Range Analog Meg-ohm Meters

ANALOG MD HITEMETER IR4018



- Single range
- 1000 V testing voltage (2000 MΩ)
- AC voltage measurement
- Bright LED, luminous scale
- Integrated hard carrying case

p.105

ANALOG MD HITEMETER IR4017



- Single range
- 500 V testing voltage (100 MΩ)
- AC voltage measurement
- Bright LED, luminous scale
- Integrated hard carrying case

p.105

ANALOG MD HITEMETER IR4016



- Single range
- 500 V testing voltage (100 MΩ)
- AC voltage measurement
- Bright LED, luminous scale
- Integrated hard carrying case

p.105

Ground Clamps and Earth Resistance Testers

CLAMP ON EARTH TESTER FT6380-50



- Grounding resistance measurement for multiple-ground installations
- Current measurement capable (AC)
- CAT IV 600 V compliant
- RMS measurement (true RMS rectification)
- Compatible with Wireless Adapter Z3210

p.113

EARTH TESTER FT60841



- 4- or 3- or 2-pole method
- Grounding resistance measurement without disconnecting ground electrodes
- IP67 protected, built tough to withstand use at harsh sites
- Compatible with Wireless Adapter Z3210

p.114

EARTH TESTER FT6031-50



- 3- or 2-pole method
- Supports Class A to Class D ground types
- IP67 dustproof and waterproof
- Compatible with Wireless Adapter Z3210

p.115

ANALOG EARTH TESTER FT3151



- Three or two electrode measurement method
- EN and IEC standard

p.115

Voltage Detectors

VOLTAGE DETECTOR 3481



- Non-metallic contact
- 40 to 600 V AC range
- Sensitivity adjustment function
- With LED light

p.116

Phase Detectors

DIGITAL PHASE DETECTOR PD3250-50 PHASE DETECTOR PD3129



- Non-metallic voltage measurements
- Non-metallic measure voltage and detect phase sequence simultaneously
- 90 to 520 V AC
- Ø 6 - 30 mm (0.24 - 1.18 in) core dia.
- Compatible with Wireless Adapter Z3210

p.116



- Non-metallic contact clip
- PD3129-10: For use on 70 to 1000 V lines (50/60 Hz), Thick conductors Ø 10 - 40 mm (0.39 - 1.57 in) core dia.
- PD3129: For use on 70 to 600 V lines (50/60 Hz), Conductors Ø 2.4 - 17 mm (0.09 - 0.67 in) core dia.

p.117

AC Current Leakage Clamp MetersCLAMP ON EARTH TESTER
FT6380-50

- Grounding resistance measurement for multiple-ground installations
- Current measurement capable (AC)
- CAT IV 600 V compliant
- True RMS
- Compatible with Wireless Adapter Z3210

p.113

AC LEAKAGE CLAMP METER
CM4001

- Measure everything from leakage to load
- 0.01 mA (resolution: 1 µA) to 600.0 A
- True RMS
- Filter function
- Earth current measurement
- Compatible with Wireless Adapter Z3210

p.112

AC LEAKAGE CLAMP METER
CM4002, CM4003

- Measure everything from leakage to load
- 0.001 mA (resolution: 1 µA) to 200.0 A
- True RMS
- External output function (CM4003)
- Compatible with Wireless Adapter Z3210

p.112

AC Current Clamp Meters for Electrical WorkAC CLAMP METER
CM4141-50

- Thin jaw easily gets into tight spaces
- 0 to 2000 AAC range
- True RMS
- V, A, Hz, Q, and other extensive measurement parameters
- Compatible with Wireless Adapter Z3210

p.110

AC CLAMP METER
CM3281
CM3291

- 42 to 2000 AAC range
- Average rectified (CM3281)
- True RMS (CM3291)
- V, A, Hz, Q, and other extensive measurement parameters

p.111

AC CLAMP METER
CM3289

- 42 to 2000 AAC range
- Weighing only 100g with this 16 mm body
- True RMS
- DMM function

p.110

AC CLAMP METER
3280-10F

- 42 to 1000 AAC range
- Weighing only 100g with this 16 mm body
- Average rectified
- DMM function

p.110

AC/DC Current Clamp Meters for General Industrial ApplicationsAC/DC CLAMP METER
CM4375-50

- Easily get into tight spaces
- 1000 A AC/DC range
- True RMS
- V, A, Hz, Q, and other extensive measurement parameters
- Earth current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210

p.107

AC/DC CLAMP METER
CM4373-50

- 600/2000 A AC/DC range
- True RMS
- V, A, Hz, Q, and other extensive measurement parameters
- Earth current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210

p.107

AC/DC CLAMP METER
CM4371-50

- 2000 A AC/DC range
- True RMS
- V, A, Hz, Q, and other extensive measurement parameters
- Earth current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210

p.107

CLAMP ON AC/DC TESTER
3288

- 100/1000 A AC/DC range
- True RMS (3288-2)
- Average rectified (3288)
- Weighing only 130g with thin 16 mm body
- DMM function

p.108

CLAMP ON AC/DC TESTER
3287

- 10/100 A AC/DC range
- True RMS
- Weighing only 130g with thin 16 mm body
- DMM function

p.109

DISPLAY UNIT
CM7290, CM7291

- Use with CT7000 series current sensors
- DCA, ACA, (DC+AC), frequency measurement
- Power supply for single sensor
- Built-in Bluetooth® wireless technology (CM7290)

p.91

Handheld Power MeterAC CLAMP POWER METER
CM3286-50

- Easy AC power meter
- Single-phase, 3-phase (balanced condition without distortion)
- Phase angle, power factor
- Voltage/current harmonics (with Z3210 installed)
- AC clamp, True RMS, battery operation
- Compatible with Wireless Adapter Z3210

p.82

**Accessories for
AC Clamp Meters**AC FLEXIBLE CURRENT
SENSOR CT6280

- For large diameter and large current measurement in combination with AC clamp meter
- 4000 A AC continuous

p.111

CLAMP ON ADAPTER
9290-10

- Primary 1000A, secondary 100A (10:1 ratio) output
- Superior phase angle characteristics for power

p.93

Connecting Instruments in the Field with IT

GENNECT Cross
SF4071, SF4072WIRELESS ADAPTER
Z3210GENNECT One
SF4000GENNECT Cloud
SF4180

- Mobile app for iOS and Android
- Improve efficiency especially for repeated measurements and recording
- Find root cause of failures through data analysis and create quick reports

p.119



- Simply plug in the Z3210 wireless adapter and your compatible HIOKI device is Bluetooth® ready

p.119



- Automatically pair with LAN-connected measuring instruments
- Display acquired data graphically in real-time
- List MAX, MIN and AVG values
- Windows compatible

p.118



- Connects to the GENNECT series to provide added value through cloud services
- Exchanging data via the cloud
- Offers storage of plans and payment methods

p.118

Data Acquisition/Digital Oscilloscope/Recorders

Highest Measurement Capabilities and Fastest Transfer Rate in History

MEMORY HiCORDER MR6000



German IF Design Award

- Work efficiently and intuitively using the MR6000's large touch panel
- Capture momentary phenomena by performing isolation measurement at up to 200 MS/s (when using the High Speed Analog Unit U8976)
- Enjoy a stress-free user experience thanks to dramatically faster saving of data
- Save data in real time while measurement continues
- CAN, CAN FD, and LIN measurement; MDI saving
- Generate user-defined waveforms and monitor values

Model No. (Order Code) **MR6000** (Main unit only, input modules up to 8 units)
MR6000-01 (Dual-channel waveform calculation and other functionality)

Note: Main unit MR6000/MR6000-01 cannot operate alone. You must install one or more optional input modules in the unit.



■ Basic specifications (Accuracy guaranteed for 1 year)

	MR6000	MR6000-01
Additional function	3DA	Real-time waveform calculation, Digital Filter calculation
Number of input units	Max. 8 units	
Number of channels	Max. 14 analog channels (when using the U8975), or 12 logic channels (when using the U875)	
Measurement ranges (10 div full-scale)	10 mV to 400 V DC, 12 ranges (when using the U8976); Resolution: 1/1600 of range 4 V to 200 V DC, 6 ranges (when using the U8975); Resolution: 1/25600 of range	
Max. allowable input	1000 V DC/700 V AC (when using the U8976), 400 V DC (when using the U8975), 200 V DC (when using the U8975)	
Frequency characteristics	D.C to 30 MHz (when using the U8976), D.C to 2 MHz (when using the U8975)	
Max. sampling rate	200 MS/s, all channels simultaneously (when using the U8976) External sampling: 10 MS/s	
Recording methods	Normal: Normal waveform recording Envelope: Record maximum and minimum values every fixed period Dual sampling: Record waveforms at a sampling rate that differs from the envelope during envelope measurement	
Calculation functions	Statistical calculation, waveform processing*, FFT calculations Power fluctuation analysis using full-wave average operator	
Storage/memory capacity	1 G-words	
Removable storage	SD memory card >1, USB memory >7, SSD/HDD (built in the main unit) >1 FTP transmission (to LAN-connected computer) *Only storage Media sold by Hioki	
Display	12.1 inch XGA-TFT color LCD (1024 × 768 dots)	
Display formats	Time-domain waveform representation, XY composite waveform display, FFT display	
External interfaces	LAN, USB, SD, SATA, Monitor output	
Power supply	100 to 240 V AC (50/60 Hz) (300 VA max.)	
Dimensions and mass	355 mm (13.9 in)W × 235 mm (9.25 in)H × 254.8 mm (6.09 in)D, 6.5 kg (22.9 lb) (mass unit only)	
Included accessories	Power cord >1, Quick start manual >1, Precautions concerning use >1, Application disk (CD-R) >1, Instruction manual (CD-R, detail and calculation) >1, Blank panel (for black slots only)	

Other options refer to the detailed catalog

• ANALOG UNIT U8966 2 ch. voltage input, 2000V/DC to 5 MHz	• DC/PMSI UNIT U8922 3 ch. Voltage, 350V/DC to 400 kHz, or PMSI (DC XGA TFT)	• HIGH SPEED ANALOG UNIT U8806 2 ch. Voltage input, 350V/DC to 8 MHz
• TEMP.UNIT U8967 3 ch. thermocouple temperature input	• LOGIC UNIT U8973 4 channels, 16 bits	• 3CH CURRENT UNIT U8977 Measurement currently defined norm current
• HIGH RESOLUTION UNIT U8968 2 ch. voltage input, 1000V/DC to 100 kHz	• DIGITAL VOLTMETER UNIT MR8900 3 ch. DC/V input, 51.27 resolution, 3000 counts	• 4CH ANALOG UNIT U8879 4 ch. voltage input, 2000V/DC to 2 MHz
• STRAIN UNIT U8969 2 ch. strain gauge type connector input	• HIGH VOLTAGE UNIT U8944 2 ch. voltage input, 1000V/DC, 100V AC	• CHARGE UNIT U8879 2 ch. Capacitance measurement, charge output / polarization output / voltage output
• FREQUENCY UNIT 2 ch. for measurement of frequency, open pulse	• CURRENT UNIT U8971 3 ch. for measuring alternating current, direct current	• HIGH VOLTAGE UNIT U8944 2 ch. voltage input, 1000V/DC, 100V AC
• CARRYING CASE C1010 For the MR6000, includes component kit options, hard tool type		• 4CH ANALOG UNIT U8879 4 ch. voltage input, 350V/DC to 2 MHz

Other options refer to the detailed catalog

Capture High-to-Low-Voltage Signals in a Single Device! Rugged, Professional and Ready for the Field

MEMORY HiCORDER MR8880



Printer unit is optional

- CAT III 600V isolation performance, directly measure a 480V power line
- 4 completely isolated channels let you simultaneously record data on a 3-phase power line plus have one extra channel
- Tough against harsh environments: -10°C to 50°C operating temperature range
- Built to withstand mechanical shocks and vibrations (shock standard with side protectors)
- Make settings easily with PRESETS function

Model No. (Order Code) **MR8880-20** (4ch, printer unit option, English model)

Note: Input cards and Battery Pack are not included. Purchase the cards appropriate for your application separately. Printer Unit MR8900 is optional and sold separately.

■ Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	4 analog channels + 3 logic channels (standard)
Note:	Isolated analog channels, isolated input and frame, logic has common GND
Measurement ranges (10 div full-scale)	4 channels of voltage measurement, mode switchable between instantaneous waveform or RMS value, 10 mV to 100 Vrms, 12 ranges, resolution: 1/64 of range 2MS measurement: 30 Hz to 10 kHz, Crest factor: 2
Max. rated voltage	Between terminals: 600 V AC/DC, Between terminal to earth: 600 V AC/DC CAT III, 300 V AC/DC CAT IV
Frequency characteristics	D.C to 100 kHz (±3dB)
Time axis (high-speed function)	100 µs to 100 ms/div, 10 ranges, Sampling period: 1/100 of range
Recording intervals (Real-time function)	100 µs to 1 minute, 19 selections (simultaneous sampling in all channels)
Measurement functions	High-speed function (high speed recording) Real-time function (actual time recording)
Memory capacity	34-bits × 1M-word/ch (1 word = 2 bytes)
Removable storage	CF card slot >1 (Up to 2 GB), USB 2.0 memory >1
Printing	Printer unit is optional (152mm (4.11 in) × 18 m (59.06 ft), thermal paper roll, Recording speed: 30 mm (3.29 inches)) Note: Printing is not supported when using alkaline batteries
Display	4.3-inch VOA-TFT color LCD (640 × 480 dots)
Displayable languages	English, Japanese, Chinese
Communication interface	USB 2.0 mini-B receptacle >1, Transfer files from the installed CF card or USB memory stick to a PC when connected, and External PC control
Power supply	AC adapter Z1002: 100 to 240V AC (50/60 Hz), 45 VA (include AC adapter, when Real-time recording), 197 VA (include AC adapter, when Real-time recording and printing) Battery pack Z1000: AC adapter has priority when used in combination with battery pack, recharge with AC adapter 3 hours. Continuous use 3 hours (with back-light ON). Li-Ion (A) alkaline batteries >8, Continuous use 40 minutes, (with back-light OFF, cannot be used with the Printer unit) DC power supply: 10 to 28 V DC (table available by special order)
Dimensions and mass	265 mm (10.0 in)W × 199 mm (7.87 in)H × 87 mm (3.43 in)D, 1.95 kg (5.36 lb) (with the 8-story pack installed) When printer is combined - with main unit: 363 mm (14.3 in)W × 199 mm (7.87 in)H × 87 mm (3.43 in)D, 2.16 kg (4.72 lb) (with the 8-story pack installed)
Included accessories	Instruction manual >1, AC adapter Z1002 >1, Alkaline battery bat >8, Step >1, USB cable >1, Application disk, Wave viewer Win, Communication commands table >1

Other options refer to the detailed catalog



Optional accessories

Other options refer to the detailed catalog

Data Acquisition/Digital Oscilloscope/Recorders

1000V Direct Input Multi-channel Logger MEMORY HiCORDER MR8875



- 1000V input and instantaneous DC or RMS waveform measurement with new Analog Unit MR8805
- Multi-channel logger capable of thermocouple temperature measurement up to 80 °C at 10 msec intervals
- Measure multiple channels simultaneously despite handheld portable design
- Max. 2 usec high-speed simultaneous logging for all input channels
- Save directly to the SD Card in real time for uninterrupted long term logging
- 16-bit high-resolution measurement of voltage, temperature, and distortion
- FFT calculation, waveform calculation functions for advanced analysis
- Intuitive touch screen for optimal operability
- Tough against vibrations and extreme temperatures
- 3 different power supplies

Model No. (Order code) **MR8875** (Max. 16 - 60ch, 32MB memory, main unit only)

Note: Test leads are not included. Purchase the leads appropriate for your application separately. AC Adapter Z1003 is included as standard.



■ Basic specifications (Accuracy guaranteed for 1 year)

Number of input units	Up to 4 slots
Number of channels	Max. 16 analog channels (Max. 40 channels when using the MR8805) + standard 8 logic channels (= 2 pulse channels)
Measurement ranges (20 dB full-scale)	5 mV to 10 V (DC), 11 ranges, when using the MR8805, 500 mV to 50 V (AC), 7 ranges (when using the MR8805), resolution: 1/1250 of range
Max. rated voltage	Between terminals: 1000 V DC, 700 V AC (when using the MR8805)
Frequency characteristics	DC to 100 kHz (-3 dB, when using the MR8805)
Time axis	100 μs to 5 ms/div, 21 ranges, sampling period: 10/10 of range, External sampling possible
Max. sampling rate	(When using MR8805) 500 kS/s (1 μs period, all channels simultaneously) (When using MR8800) 10 ms (all eight channels recorded simultaneously using every sampling interval) (When using MR8800) 200 kS/s (5 μs period, all channels simultaneously) External sampling: 200 kS/s (1 μs period)
Measurement functions	High-speed function (high speed recording), Real-time calculation between channels, FFT calculation, or other functions
Storage memory capacity	Total 72 Mwords (memory expansion: 16x, 32M per input unit) Max. 1 word = 2 bytes, therefore 72 Mbytes = 144 Megabytes
Removable storage	SD card slot × 1, USB 2.0 memory
Display	Touch-panel operation 3.4-inch QVGA-TFT color LCD (600 × 480 dots)
Communication interfaces	LAN: 10BASE-T/100BASE-TX (DHCP, DNS supported), FTP server/client, WEB server, mail, E-mail, command control USB: USB 2.0 compliant, remote mini-B receptacle × 1 (serial / memory with communication command, or RS-232C (ID card to PC), serial A receptacle × 1 (RS-232 memory, USB mouse key-board))
Power supply	1) AC adapter Z1002: 100 to 240 V AC (50/60 Hz), 56 VA 2) Battery pack Z1003: 7.2 V DC, 36 VA, continuous operation time: 1 hour with backlight OFF/AC adapter priority when switch combination with battery pack. Charger while installed in the MR8875, recharging time: 3 hours 3) External DC Power: 10 to 28 V DC, 56 VA, (please contact your HIOKI distributor for connection cord)
Dimensions and mass	298 mm (W) 73 mm (H) × 124 mm (D) (2.02 kg) × 84 mm (H) 3.17 in (D), 2.43 kg (5.37 lb) (excluding accessories and the battery pack Z1003)
Included accessories	Instruction manual × 1, Measurement guide × 1, AC adapter Z1002 × 1, Protection sheet × 1, USB cable × 1, Shoulder strap × 1, Application disk (Wave viewer Win, communication command table, CANCode.exe) × 1

Data Loggers

Other options: refer to the detailed catalog



AC ADAPTER
Z1002
For main unit, DC power,
power source external battery,
programmable relay, Approx.
2.4 kg (5.3 lb)



POWER CABLE L1012
For main unit, DC power,
power source external battery,
programmable relay, Approx.
2.4 m (8 ft)



BATTERY PACK
Z1003
For the MR8864,
unplugged on use; 7.2 V (1.5 Ah),
CAN FD is not supported



CAN CABLE S713-01
For the MR8864,
unplugged on use; 7.2 V (0.9 Ah),
CAN FD is not supported




SD MEMORY CARD
Z4001 (2GB)
Z4003 (8GB)

Card Protection
Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.



CARRYING CASE
C1004
For the MR8875, includes
compartment for options,
hard disk type



Installation of recording device may need to be exposed for use
CAN UNIT MR8804
2-port, serial 16 analog channels
and up to 16 logic channels,
CAN FD is not supported.
ANALOG UNIT MR8805
2ch, high-voltage measurement
(parallel with MR8803) to
2.048A (or less)

Oscilloscope-like Waveform Observation, Plus Recording of RMS Variations - In a Single Device! MEMORY HiCORDER MR8870



■ Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	2 analog channels + 4 logic channels (monitored)
Measurement ranges	Note: Unloaded analog channels, isolated input and frame, Input Bus common GND
Max. rated voltage	10 mV to 50 V (DC, 10 dB full-scale), 12 ranges, Resolution: 3/30 of range
Frequency characteristics	Between terminals: 400 V (DC), Between terminal to earth: 300 V (AC), DC CAT II
Time axis	DC to 50 kHz (-3 dB)
(Memory mode)	100 μs to 5 ms/div, 20 ranges at 100 pixels/div resolution, three steps of time-axis magnification from × 1 to × 10, and 8 steps of time-axis compression from × 1/2 to × 1/100
Recording intervals (RMS mode)	1 ms to 1 min., 16 settings, sampling period: 200 μs (fixed) (for AC voltage/current, 1,000 RMS values/sec.), envelope mode always on
Note: Only the maximum value and minimum value for each recording interval are recorded.	
Measurement functions	Memory recorder (high speed recording), RMS recorder (50/60 Hz, DC mode)
Memory capacity	12-bits × 28-word/track (1 word = 2 bytes)
Removable storage	CF card TYPE I 4 MB × 1 (Up to 2 GB)
Display	4.3-inch QVGA-TFT color LCD (600 × 480 dots)
Displayable languages	English, Japanese
Interfaces	USB 2.0 mini-B receptacle × 1, Functionality: Connect the instrument to a PC to send files on the CF card to the PC. The instrument cannot be controlled from a PC.
Printer	N/A
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA max. (when using the AC adapter and charging the Z1003 with the instrument). Battery Pack Z1003: 3 VA, continuous operating time of approx. 2 hr. (23°C reference value, when used with the Z1003, the Z1003 takes priority), charging time of 200 min. using the AC adapter (23°C reference value) (option). External DC power: 10 to 28 V DC, 10 VA max. (connection cord not included by special-order).
Dimensions and mass	176 mm (W) 93 mm (H) × 101 mm (D) (0.91 kg) × 43 mm (1.74 in (D), 600 g (1.32 lb) (with the Battery pack Z1003 installed))
Included accessories	Instruction manual × 1, Measurement guide × 1, AC adapter Z1005 × 1, Strap × 1, USB cable × 1, Application disk (Dedicated program for the MR8870) × 1, Protection sheet S909 × 1

Model No. (Order code) **MR8870-20** (2ch, English model)

Note: Input cords and battery pack are not included. Purchase the cords appropriate for your application separately. The AC Adapter Z1005 is included as standard.



PROTECTION SHEET S909
For LCD protection, part of additional sheet can
be purchased separately, bundled with instrument.



AC ADAPTER Z1005
100 to 240 V AC, bundled
with instrument.

Options



BATTERY PACK Z1003
NIMH, Charger white
installed in the main unit



SOFT CASE S912
Includes space for small items, Neoprene rubber



CARRYING CASE S9709
Includes compartment for options,
hard disk type



PC CARD 2G S930 (1GB capacity)
PC CARD 1G S929 (1GB capacity)
PC CARD 512M S928 (512MB capacity)

Data Acquisition/Digital Oscilloscope/Recorders

The Global Standard Recorder for Field and R&D Testing

MEMORY HiCORDER MR8847A



USB

LANT

CE

**3 years
Warranty**

- Supports a wide variety of measurements with a total of 17 plug-in modules
- Generate and record with a single unit
- Direct 1000 V high voltage input testing
- High-speed sampling up to 20MS/s with fully isolated inputs
- 32 analog + 16 logic channels to 64 logic + 20 analog channels
- High-speed sampling with waveform judgement function
- Steel-resistant construction strong against adverse working environments
- Big buttons coated to withstand industrial oil and residue
- Drop-in paper loading and one-touch setup, along with high-speed 50mm/s printing

Model No. (OEM Order) **MR8847-51** (Max. 16ch, 64MW memory, main unit only)

MR8847-52 (Max. 16ch, 256MW memory, main unit only)

MR8847-53 (Max. 16ch, 512MW memory, main unit only)

Note: Main unit MR8847-51/-52/-53 cannot operate alone. You must install one or more optional input modules in the unit.

Accessories: Instruction manual x1, Measurement guide x1, Application disk (Windows® Win, Communication command table) x1, Power cord x1, Input coil label x1, USB cable x1, Printer paper x1, Roll paper attachment x2, Ferrite clamp x1

■ Basic specifications (Accuracy guaranteed for 1 year)

Max. Number of channels	36 ch analog + 16 ch logic, or 10 ch analog + 64 ch logic (when used with built-in logic input + plug-in logic unit 8973 x 3)
Number of slots	8 slots (Max. 8) [Limitation on number of slots] when using the Current Unit 8973, Max. 4, when using the Logic Unit 8973, Max. 3
Number of logic channels	16 ch logic (logic probe terminal GND share a common GND with channel 0) Built-in logic input is available when using DVM Unit MR2990 as slot 1 or 2 [Limitations on using built-in logic input] (with logic measurement ON) <ul style="list-style-type: none"> Measurement resolution on slot 1 or 2 is limited up to 12 bits Cannot use Frequency Unit 8979 on slots 1 or 2
Measurement ranges (20-ch full-scale)	[Analog Unit 8966]: 5mV/dy to 20V/dy, 12 ranges, resolution : 1/100 of range (using 12-bit A/D) [High Voltage Unit 8968]: 200 mV/dy to 20 kV/dy, 12 ranges, resolution : 1/1600 of range (using 16-bit A/D)
Max. allowable input	400 V DC (using the 8966), 1000 V DC (using the 8968)
Frequency characteristics	D.C to 5 MHz (-3 dB, using the 8966), D.C to 100 kHz (using the 8968)
Time axis (Memory function)	5 μs to 5 ms/div (100 samples/div) 26 ranges, External sampling (100 samples/div, or free setting), Time axis zoom x2 to x10 in 3 stages, compensation : 10 to 1/100 000 us in 16 stages
Measurement functions	MEMORY (high-speed recording), RECORDER (real-time recording), XY RECORDER (XY real-time recording), FFT
Other functions	Waveform judgment (at Memory or FFT function)
Memory capacity	MR8847-51: Total 64 M-words (Memory expansion: none) 32 MWoch (using 2 Analog channels), to 4 MWoch (using 16 Analog channels) MR8847-52: Total 256 M-words (Memory expansion: none) 128 MWoch (using 2 Analog channels), to 16 MWoch (using 16 Analog channels) MR8847-53: Total 512 M-words (Memory expansion: none) 256 MWoch (using 2 Analog channels), to 32 MWoch (using 16 Analog channels)
Removable storage	CF card slot (standard), 1.8 to 2.5 inch (IDE interface), SSD (2.5 inch), USB memory disk (USB 2.0)
Printing	216 mm (8.5 in) × 30 m (9.8 ft), thermal paper roll, Recording speed : Max. 50 mm (1.97 in)/s
Display	10.4 inch TFT color LCD (TGA, 800 × 600 dots)
Displayable languages	English, Japanese, Korean, Chinese
External interfaces	[LAN] 100Base-TX (RJ45 port), HTTP server, HTTPS server, [USB] U2B 2.0 compliant, series A receptacle x1, series B receptacle x1, DC input/outputs/CF card to PC, or remote control from PC
Power supply	100 to 240 V AC, 50/60 Hz (100 VA max., when using printer: 220 VA max.) 20 to 28 V DC (when using the optional factory installed DC Power Unit 9784)
Dimensions and mass	391 mm (15.4 in) W × 281 mm (11.1 in) H × 145 mm (5.7 in) D, 7.6 kg (16.7 lb) (main unit only)

Other options: refer to the detailed catalog



SSD UNIT 1000:
Specify your order.
Unit in type: 128 GB



DC-POWER UNIT 9784:
Factory installed option - not
available as an add-on.
Unit in type: 128 GB



RECORDING PAPER 9231:
Unit width: 210 mm (8.3 in)
× 30 m (9.8 ft), 6 dot/line



CARRYING CASE 9793:
For the MR8847 series MR880
series, includes compartment
for options, lead mask type

For ordering, see the main text. This is required by law.

• ANALOG UNIT 8966: 2 ch voltage input, 20MsA (DC) to 5MHz	• FREQUENCY UNIT 8970: 2 ch, for measurement of frequency 1 cps, pulse
• DC-ANALOG UNIT 8969: 2 ch voltage input, 20MsA (DC) to 20MHz	• CURRENT UNIT 8971: 2 ch, for measuring current using dedicated current sensor
• HIGH-ANALOG UNIT 8968: 2 ch voltage input, 20MsA (DC) to 20MHz	• 3CH-CURRENT UNIT 8977: 3 ch, for measuring alternating or dc current source
• TEMP.UNIT 8967: 1 ch, thermocouple temperature input	• HIGH-RESOLUTION UNIT 8968: 2 ch, Voltage, 1MsA (DC) to 400 MHz, or 1MsA (DC) to 100 MHz
• HIGH-RESOLUTION UNIT 8969: 2 ch, voltage input, 1MsA (DC) to 100 MHz	• LOGIC UNIT 8979: 4 channels, 16-bits
• STRAIN.UNIT 8969: 2 ch, strain gauge input, 0.1% resolution, 500 times magnification	• DIGITAL VOLTMETER UNIT 89800: 1 ch, DC V input, 0.1% resolution, 500 times magnification
	• WAVEFORM GENERATOR UNIT MR8700: 4 ch, 2.5V DC output, 1 Hz to 20 kHz sine wave-form output
	• PULSE GENERATOR UNIT MR8791: 0.01, 0.1, 1 Hz to 20 kHz pulse, pattern output
	• ARBITRARY WAVEFORM GENERATOR UNIT 8970: 2 ch, 50 ns/div to 100 kHz, arbitrary waveform generator (10 ns/div to 20 MHz, Output 17-V
	• HIGH VOLTAGE UNIT 8969: 2 ch, voltage input, max. 1000 V DC, 100 V AC
	• CHARGE UNIT 8979

Waveform Generation and Recording. Total 64ch, 32 Analog Channels + 32 Logic Channels

MEMORY HiCORDER MR8827

USB

LANT

CE

**3 years
Warranty**



- Generate and record waveforms with a single unit
- Output previously recorded problematic waveforms and apply to devices under test to simulate potential issues
- 32 analog + 32 logic channels to 28 analog + 64 logic channels
- High-speed sampling up to 20MS/s with fully isolated inputs
- Safe measurement with all isolated analog inputs
- Large capacity memory of total 512M-words
- Measure various system signals from high voltage to ultra low voltage simultaneously

Model No. (OEM Order) **MR8827** (Max. 32ch, 512MW memory, main unit only)

Note: Main unit MR8827 cannot operate alone. You must install one or more optional input modules in the unit.

■ Basic specifications (Accuracy guaranteed for 1 year)

Max. Number of channels	32 ch analog + 32 ch logic, or 28 ch analog + 64 ch logic (when use with built-in logic input + plug-in logic unit 8973 x 2)
Number of slots	36 slots (Max. 16)
Number of logic channels	32 ch logic (logic probe terminal GND share a common GND with channel 0) Built-in logic input is available when using DVM Unit MR2990 as slot 1, 2, 9, or 10 <ul style="list-style-type: none"> Limitations on using built-in logic input (with logic measurement ON) <ul style="list-style-type: none"> Measurement resolution on slot 1, 2, 9, or 10 is limited up to 12 bits Cannot use Frequency Unit 8979 on slots 1, 2, 9, or 10
Measurement ranges (20-ch full-scale)	[Analog Unit 8966]: 5mV/dy to 20V/dy, 12 ranges, resolution : 1/100 of range (using 12-bit A/D) [High Resolution Unit 8968]: 5mV/dy to 20 kV/dy, 12 ranges, resolution : 1/1600 of range (using 16-bit A/D)
Max. allowable input	400 V DC (using the 8966)
Frequency characteristics	D.C to 5 MHz (-3 dB, using the 8966), D.C to 100 kHz (using the 8968)
Time axis (Memory function)	5 μs to 5 ms/div (100 samples/div) 26 ranges, External sampling (100 samples/div, or free setting), Time axis zoom x2 to x10 in 3 stages, compensation : 10 to 1/100 000 us in 16 stages
Measurement functions	Memory (high-speed recording), RECORDER (real-time recording), XY RECORDER (XY real-time recording), FFT
Other functions	Memory calibration, Waveform processing, Waveform judgment (at Memory or FFT function)
Memory capacity	128M-word/chan (using 4 Analog channels) to 1GM-word/chan (using 32 Analog channels), Total capacity 512MW memory
Data storage media	USB memory stick, CF card, 8 million 1GB unit (option), (2GB) × 10 pages, 128 sec. when using 100 MB of data, Once 100 MB can record 16,000 div waveform across 32 channels
Printing	[Built-in A4-size printer option]: 216 mm (8.5 in) × 30 m (9.8 ft), thermal paper, 2nd, Recording speed : Max. 50 mm (1.97 in)/s
Display	10.4 inch TFT color LCD (TGA, 800 × 600 dots)
External interfaces	[LAN] 100Base-TX, USB 2.0 series A receptacle 2 port (for USB memory, main), USB 2.0 series B receptacle (for communication with PC, main storage)
Power supply	100 to 240 V AC, 50/60 Hz (100 VA max., when using printer: 220 VA max.)
Dimensions and mass	491 mm (19.3 in) W × 281 mm (11.1 in) H × 308 mm (12.1 in) D (Gehäuse/protecting parts emerged), 12.6 kg (28.0 lb) (main unit only)
Included accessories	Instruction manual x1, Power cord x1, Application disk (CD-R x1), Input coil label x1, Printer paper x1 (when using printer), Roll paper attachment x2 (when using printer)

Other options: refer to the detailed catalog



SSD UNIT 1000:
Specify your order.
Unit in type: 128 GB



PRINTER UNIT 1000:
Built-in printer. Printing width:
200 mm (7.9 in). Compatible
printing paper: Model Y20



RECORDING PAPER 9231:
Unit width: 210 mm (8.3 in)
× 30 m (9.8 ft), 6 dot/line




CARRYING CASE (special
order): Lead mask type Japan with your
local distributor

• ANALOG UNIT 8966: 2 ch, voltage input, 20MsA (DC) to 5MHz	• FREQUENCY UNIT 8970: 2 ch, for measurement of frequency 1 cps, pulse
• TEMP.UNIT 8967: 1 ch, thermocouple temperature input	• DC-ANALOG UNIT 8969: 2 ch, voltage input, 20MsA (DC) to 20MHz
• HIGH-RESOLUTION UNIT 8968: 2 ch, voltage input, 20MsA (DC) to 100 MHz	• LOGIC.UNIT 8979: 4 channels, 16-bits
• STRAIN.UNIT 8969: 2 ch, strain gauge input, 0.1% resolution, 500 times magnification	• DIGITAL VOLTMETER UNIT 89800: 1 ch, DC V input, 0.1% resolution, 500 times magnification
	• WAVEFORM GENERATOR UNIT MR8700: 4 ch, 2.5V DC output, 1 Hz to 20 kHz sine wave-form output
	• PULSE GENERATOR UNIT MR8791: 0.01, 0.1, 1 Hz to 20 kHz pulse, pattern output
	• ARBITRARY WAVEFORM GENERATOR UNIT 8970: 2 ch, 100 MHz, 100 ns to 100 ms
	• HIGH VOLTAGE UNIT 8969: 2 ch, voltage input, max. 1000 V DC, 100 V AC
	• CHARGE UNIT 8979

Data Acquisition/Digital Oscilloscope/Recorders

Max. 108 Analog Channels, Reduce Inspection Data Transfer Time to Zero

MEMORY HiCORDER MR8740T

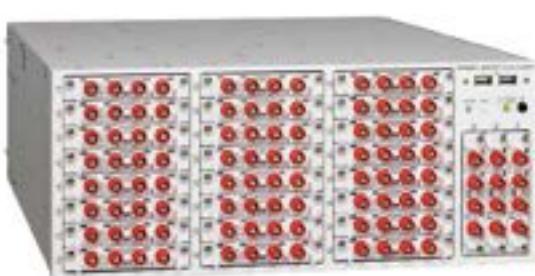

- Ideal for multipoint inspection of high performance boards such as ECU
- 108ch analog to 98ch analog + 48ch logic input
- Reduce time required to save to external media to max. 1/100 compared with conventional method
- 20 MS/s simultaneous sampling on all channels
- Safe measurement with all analog inputs isolated
- Supports 4K monitor to display multi-channel waveforms without overlapping
- Measure 4 channels with 1 unit (4 ch analog Unit U8975, 4 ch DVM Unit U8991)
- Generate constant voltage, constant current, and simulated resistance (VIR Generator Unit U8794)

Model No. (Order Code) **MR8740-50** (Max. 108ds, 10W memory, main unit only)

Note: A special option such as an input unit is required for the main unit. Please purchase various common options such as input card separately.


■ Basic specifications (Accuracy guaranteed for 1 year)

Number of input units	Max. 27 slots
	(Using the U8975) Max. 108 ch analog, or 94 ch analog + 48 ch logic (when used in combination with U8975 + 3973)
	(Using the U896) Max. 54 ch analog, or 48 ch analog + 48 ch logic (when used in combination with 3964 + 3973)
Number of channels	Logic unit 3973 is limited to slots 25 to 27, up to 7 units Analog unit channels are isolated from each other and from channel. Logic unit channels share a common GND with channel.
Measurement ranges	100 mV to 400 V Ex, 12 ranges, resolution: 1/2000 of range (when using 3964) 4.7 V to 200 V Es, 6 ranges, resolution: 1/2000 of range (when using U8975) 100 mV to 3000 V Es, 5 ranges, resolution: 1/1000 000 of range (when using U8990) 1V, 10V, 100V Es, 3 ranges, resolution: 1/1000 000 of range (when using U8990)
Max. allowable input	400 V DC (when using 3964; upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	300 V AC/DC (input and earth connection are isolated, between input channels and chassis, upper limit voltage that can be applied between input channels without damage)
Frequency characteristics	DC to 5 MHz (-3 dB, when using 3964)
Max. sampling speed	20 MS/s, all ch simultaneous, external sampling: 10 MS/s
Measurement functions	Memory (high speed recording)
Memory capacity	Total of 1 GB Word installed, 16 MW installed (when using 3964), 8 MW (when using U8975 or U8990), 4 MW (when using U8991)
Internal storage	SSD 480 GB
Removable storage	USB memory stick × 8
Monitor output	VGA, HDMI, Display Port, Resolution: 1920 × 1080 pixel or more
External interfaces	[LAN] 1000 Base-TX, 100 Base-TX, 10 Base-TX (G port)(DHCP and DNS support, FTP server/HTTP server)
	[USB] USB 3.0 Series A receptacle × 4, USB 2.0 × 4
Power supply	100 to 240 V AC, 50/60 Hz (400 VA max.)
Dimensions and mass	436 mm (W) × 71 mm (H) × 505 mm (D) (9.97 in (H) × 19.69 in (D), 14.0 kg (49.1 lb) (main unit only))
Included accessories	Power cord, Quick Start Manual (English), Instruction Manual (Detailed edition) (CD-R), Application disk (CD-R), Blank panel (Black dot only), rack installation hardware

Options	Details for accessories and the main unit. These are indicated by code.
	• ANALOG UNIT U8966 2 ch, voltage input, 20MS/s (DC to 5 MHz) • ANALOG UNIT U8975 4 ch, voltage input, 30MS/s (DC to 2 MHz) • ANALOG UNIT U8976 4 ch, voltage input, 30MS/s (DC to 2 MHz) • 4CH ANALOG UNIT U8978 4 ch, voltage input, 30MS/s (DC to 2 MHz) • TEMP-UNIT U8967 2 ch, thermocouple temperature input • HIGH-RESOLUTION UNIT U8968 2 ch, voltage input, 30MS/s (DC to 100 MHz) • STRAIN UNIT U8969 2 ch, strain gauge type connecting • FREQ-UNIT U8970 4 ch, thermometer frequency, opt. pulse • CURRENT UNIT U8971 2 ch, for measuring current using dedicated current sensors
	• DVM-UNIT U8972 2 ch, Voltage input, 1MS/s (DC to 1 MHz) • LOGIC-UNIT U8973 4 channels, 16 bits • DIGITAL VOLTMETER UNIT MR8990 2 ch, DC/V input, 11.5 μV resolution, 1000 points sampling • DIGITAL VOLTMETER UNIT U8991 4 ch, DC/V input, 1.47 μV resolution, 50 points sampling • 32-CH CURRENT UNIT U8977 3 ch, for measuring current using dedicated current sensors • CHARGE-UNIT U8979 2 ch, for recording current using charge voltage / pulse amplitude output / voltage output • DIGITAL VOLTMETER UNIT MR8990 4 ch, DC/V input, 11.5 μV resolution, 1000 points sampling • ARBITRARY WAVEFORM GENERATOR UNIT U8793 2 ch, FO function 10.24 kHz (10.24 kHz), Arbitrary wave form generation (200 ns), which can 2 MHz, Output 2.5 V • PULSE GENERATOR UNIT MR8791 2 ch, 0.1 Hz to 20 MHz pulse, pulse output • VIR-GENERATOR UNIT U8794 2 ch, DC voltage, DC current, resistance (variable output)
	• DIGITAL VOLTMETER UNIT MR8990 2 ch, DC/V input, 11.5 μV resolution, 1000 points sampling • DIGITAL VOLTMETER UNIT U8991 4 ch, DC/V input, 1.47 μV resolution, 50 points sampling • HIGH-VOLTAGE UNIT U8974 2 ch, DC/V input, max. 1000 V DC, 700 V AC • CHARGE-UNIT U8979 2 ch, for recording current using charge voltage / pulse amplitude output / voltage output • WAVEFORM GENERATOR UNIT MR8990 4 ch, 0.1 Hz to 20 MHz pulse, waveform output
	• ARBITRARY WAVEFORM GENERATOR UNIT U8793 2 ch, FO function 10.24 kHz (10.24 kHz), Arbitrary wave form generation (200 ns), which can 2 MHz, Output 2.5 V • PULSE GENERATOR UNIT MR8791 2 ch, 0.1 Hz to 20 MHz pulse, pulse output • VIR-GENERATOR UNIT U8794 2 ch, DC voltage, DC current, resistance (variable output)

High-speed/Isolated Multi-channel Measurement System Recorders (rack-mounted)

MEMORY HiCORDER MR8740, MR8741

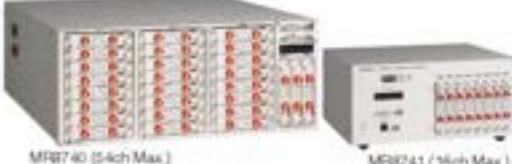

- Introducing the DVM Unit MR8990 with high 24-bit resolution! Perform high-speed, high-accuracy measurement without going through a scanner
- Support for multi-channel measurement (MR8740: up to 54 ch, MR8741: up to 16 ch)
- Isolated input (between input channels, input-to-chassis isolation, maximum input-to-ground rated voltage of 300 V AC/DC)
- High-speed sampling (max. 20 MS/s, with 54-ch type, simultaneous sampling of up to 32 ch)
- Ideal for rack-mounting (4U height within 190 mm, display-less, box-type design)
- Display waveforms and make settings on a DVI-D connected monitor and mouse
- Remote measurement via LAN using control commands from a PC

*Screen monitoring and remote operation available via Internet browser. For faster and more convenient remote operation, we recommend using the Hioki 9833 LAN Communicator.

Model No. (Order Code) **MR8740** (Max. 54ds, 164MW memory, main unit only)

MR8741 (Max. 16ds, 256MW memory, main unit only)

Note: Model MR8740/MR8741 requires input units and other dedicated options. Input cards not included.
For more information about input cards and other common options, refer to the detailed catalog.

■ Basic specifications (Accuracy guaranteed for 1 year)

	MR8740	MR8741
Max. Number of channels	Block II: 32 ds analog + 8 logic, or 29 ds analog + 24 logic (when used with built-in logic input + plug-in logic unit 3973) × 3 Block II: 21 ds analog + 9 logic, or 29 ds analog + 24 logic (when used with built-in logic input + plug-in logic unit 3973) × 3	16 ds analog + 16 ds logic, or 16 ds analog + 14 ds logic (when used with built-in logic input + plug-in logic unit 3973) × 3
Number of slots	[Block II] 16 slots (Min. H), [Block II] 11 slots (Max. H) [Limitation on number of slots] When using the Logic Unit 3973, Max. 16. When using the Logic Unit 3970, [Block II] 11, maximum 16 ch × 16 [Block II] 11, maximum 9 ch × 11	8 slots (Max. H) [Limitation on number of slots] cannot use Current Unit 3970. When using the Logic Unit 3973, Max. 3
Number of logic channels	[Block II] 8 ch logic (Logic probe terminal GND share a common GND with chassis.) [Block II] 11 logic (Logic probe terminal GND share a common GND with chassis.) [Limitation on logic input logic signal connection to both Block I and Block II logic input connection] 16 • Measurement in either one slot 1 and 2 is limited up to 12 bits • Cannot use Frequency Unit 3970 on slot 1 and 2 • When using 3970, the 3970 must be in slot 1 or 2 because it has no logic input	16 ch logic (Logic probe terminal GND share a common GND with chassis.) [Limitation on logic input logic signal connection to both Block I and Block II logic input connection] 16 • Measurement resolution 16 bits in logic input (with logic resolution of 16 bits) • Measurement resolution 16 bits in logic input (with logic resolution of 16 bits) • Measurement resolution 16 bits in logic input (with logic resolution of 16 bits) • Cannot use Frequency Unit 3970 on slot 1 and 2
Measurement ranges (20 dB full scale)	5 mV to 20 V/8k, 12 ranges, resolution: 1/2000 of range (when using 3964) 5 mV to 50 V/8k, 5 ranges, resolution: 1/50,000 of range (when using MR8990)	5 mV to 20 V/8k, 12 ranges, resolution: 1/2000 of range (when using 3964) 5 mV to 50 V/8k, 5 ranges, resolution: 1/50,000 of range (when using MR8990)
Max. allowable input	400 V DC (excluding 3964; upper limit voltage that can be applied between input terminals without damage)	300 V AC/DC (input and earth connection are isolated, between input channels and chassis, upper limit voltage that can be applied between input channels without damage)
Max. rated voltage to earth	300 V AC/DC (input and earth connection are isolated, between input channels and chassis, upper limit voltage that can be applied between input channels without damage)	300 V AC/DC (input and earth connection are isolated, between input channels and chassis, upper limit voltage that can be applied between input channels without damage)
Frequency characteristics	DC to 5 MHz (-3 dB, when using 3964)	DC to 5 MHz (-3 dB, when using 3964)
Time axis (MEMORY operation)	5 ps to 5 ms/8k, 26 ranges, time axis resolution: 100 points/div, time axis expansion: 3 stages from × 2 to × 30, compression: 13 stages from 1/2 to 1/20,000	5 ps to 5 ms/8k, 26 ranges, time axis resolution: 100 points/div, time axis expansion: 3 stages from × 2 to × 30, compression: 13 stages from 1/2 to 1/20,000
Measurement functions	Memory (high speed recording), FFT, Recorder	Memory (high speed recording), FFT, Recorder
Memory capacity	16 MW (disk), total of 394 MW installed	16 MW (disk), total of 156 MW installed
Removable storage	USB memory stick (USB 2.0)	USB memory stick (USB 2.0)
Display	Non-Liquid Crystal Terminal, 800 × 600 dots	Non-Liquid Crystal Terminal, 800 × 600 dots
External interfaces	[LAN] 100Base-TX (DHCP and DNS support, PTP server, HTTP server) [USB] USB 2.0 Series A receptacle × 2 (measure operation)	[LAN] 100Base-TX (DHCP and DNS support, PTP server, HTTP server) [USB] USB 2.0 Series A receptacle × 2 (measure operation)
Power supply	100 to 240 V AC, 50/60 Hz (400 VA max.)	100 to 240 V AC, 50/60 Hz (120 VA max.)
Dimensions and mass	436 mm (W) × 71 mm (H) × 505 mm (D) (9.97 in (H) × 19.69 in (D), 16.0 kg (35.4 lb) (measured only))	436 mm (W) × 71 mm (H) × 505 mm (D) (9.97 in (H) × 19.69 in (D), 12.0 kg (26.5 lb) (measured only))
Included accessories	Instruction manual, Application disk (Non-volatile Memory Communication module add.), Power cord, etc.	Instruction manual, Application disk (Non-volatile Memory Communication module add.), Power cord, etc.

Options	Details for accessories and the main unit. These are indicated by code.
	• ANALOG UNIT U8966 2 ch, voltage input, 20MS/s (DC to 5 MHz) • TEMP-UNIT U8967 3 ch, thermometer frequency input • HIGH-RESOLUTION UNIT U8968 2 ch, voltage input, 30MS/s (DC to 100 MHz) • STRAIN-UNIT U8969 2 ch, strain gauge type connecting • FREQ-UNIT U8970 4 ch, thermometer frequency, opt. pulse • CURRENT-UNIT U8971 2 ch, for measuring current using dedicated current sensors
	• DVM-UNIT U8972 2 ch, Voltage input, 1MS/s (DC to 1 MHz) • LOGIC-UNIT U8973 4 channels, 16 bits • DIGITAL VOLTMETER UNIT MR8990 2 ch, DC/V input, 11.5 μV resolution, 1000 points sampling • DIGITAL VOLTMETER UNIT U8991 4 ch, DC/V input, 1.47 μV resolution, 50 points sampling • HIGH-VOLTAGE UNIT U8974 2 ch, DC/V input, max. 1000 V DC, 700 V AC • CHARGE-UNIT U8979 2 ch, for recording current using charge voltage / pulse amplitude output / voltage output • WAVEFORM GENERATOR UNIT MR8990 4 ch, 0.1 Hz to 20 MHz pulse, waveform output
	• ARBITRARY WAVEFORM GENERATOR UNIT U8793 2 ch, FO function 10.24 kHz (10.24 kHz), Arbitrary wave form generation (200 ns), which can 2 MHz, Output 2.5 V • PULSE GENERATOR UNIT MR8791 2 ch, 0.1 Hz to 20 MHz pulse, pulse output • VIR-GENERATOR UNIT U8794 2 ch, DC voltage, DC current, resistance (variable output)
	• DIGITAL VOLTMETER UNIT MR8990 2 ch, DC/V input, 11.5 μV resolution, 1000 points sampling • DIGITAL VOLTMETER UNIT U8991 4 ch, DC/V input, 1.47 μV resolution, 50 points sampling • HIGH-VOLTAGE UNIT U8974 2 ch, DC/V input, max. 1000 V DC, 700 V AC • CHARGE-UNIT U8979 2 ch, for recording current using charge voltage / pulse amplitude output / voltage output • WAVEFORM GENERATOR UNIT MR8990 4 ch, 0.1 Hz to 20 MHz pulse, waveform output

Non-contact Sensing

Easy CAN Acquisition, Simply Pinch Over Wire Insulation

NON-CONTACT CAN SENSOR SP7001, SP7002



- Acquire CAN FD/CAN data immediately, simply by pinching probes over wire insulation with one-hand
- Eliminate concerns by using non-contact sensing technology
- Use in a diverse array of development and evaluation applications that demand reliability

Model No. (Order Code) SP7002-90 (Supports CAN signals, SP7001, SP7100, SP9200 not)
 SP7001-90 (Supports CAN FD / CAN signals, SP7002, SP7100, SP9100 not)
 SP7001-95 (Supports CAN FD / CAN signals, SP7001, SP9200, SP7150 not)

■ Basic specifications

Detection method	Capacitive-coupled signal detection (3 to bare-wire connections)
Detectable cables	AVB/AVB33-compliant cables, External diameter: 1.2 mm (0.05 in) to 2.0 mm (0.08 in)
Number of channels	1 CH (SP7150), 2 CH (SP7100)
Compatible communications speeds	SP7001: CAN, CAN FD 125 kbit/s to 3 Mbit/s SP7002: CAN 125 kbit/s to 1 Mbit/s
Total delay time	130 ns (typical)
CAN terminal resistance	60 Ω (typical), built-in
Signal output connector	D-sub 9-pin female

Operating temperature, humidity	Temperature: -40 °C to 85 °C (-40 °F to 185 °F) Humidity: -40 °C to 60 °C (-40 °F to 140 °F), 80% RH or less (with no condensation), 60 °C to 85 °C (140 °F to 185 °F), 60% RH or less (with no condensation)
---------------------------------	---

Power supply	(1) When using the SP7001-95 or SP7150 - USB bus power (5 V DC), Maximum rated power: 8 VA - Z1013 AC Adapter: Rated supply voltage: 100 V to 240 V AC, Maximum rated power: 6 VA (including AC adapter), 1 VA (product only)
	(2) When using the SP7001-90, SP7002-90, or SP7100 - Z1008 AC Adapter: Rated supply voltage: 100 V to 240 V AC, Maximum rated power: 8 VA (including AC adapter), 3 VA (product only) - External power supply: Rated supply voltage: 10 V to 30 V DC, Maximum rated power: 3 VA

Dimensions and mass	SP7001, SP7002: 44 W × 85 H × 20 D mm (1.73 in. W × 3.35 in. H × 0.79 in. D), 160 g (5.55 oz.), Cable length: 2.5 m (8.20 ft.) SP7100: 55 W × 120 H × 25 D mm (2.17 in. W × 4.72 in. H × 0.98 in. D), 130 g (4.59 oz.), Cable length: 0.3 m (0.98 ft.) SP7150: 47 W × 100 H × 20 D mm (1.85 in. W × 3.94 in. H × 0.79 in. D), 100 g (3.52 oz.), Cable length: 0.3 m (0.98 ft.) SP9200: 20.5 W × 24.5 H × 101 D mm (0.81 in. W × 0.96 in. H × 3.98 in. D), 45 g (1.59 oz.), Cable length: 0.8 m (2.62 ft.) SP9100: 41.6 × 33.7 H mm (16.46 in. × 1.33 in.), 26 g (0.92 oz.), Cable length: 0.5 m (1.64 ft.)
	*Dimensions do not include cables. Mass includes cables.

Included accessories (SP7001, SP7002)	Quick Start Manual <1>, Operating Precautions <1>
Included accessories (SP7100)	Quick Start Manual <1>, Operating Precautions <1>, Spiral tube <1>, Power cable L9500 <1>, Alligator clip <1>, Ground connection cable <1>
Included accessories (SP7150)	Quick Start Manual <1>, Operating Precautions <1>, Spiral tube (for fixing power cable) <1>, USB Cable L9510 <1>, Ground connection cable <1>, Alligator clip <1>



Recorders Peripherals

Measure High Voltages Safely

DIFFERENTIAL PROBE P9000



- Compact probe for CAT III 1000V environments
- Wave mode: Observe instantaneous waveforms
- RMS mode: Observe RMS value waveforms
- Principal areas of use**
 - High-voltage battery circuits in EVs, HEVs, and other automobiles
 - High-voltage circuits in energy-related equipment such photovoltaic cells
 - Commercial power line circuits (400 Vrms, etc.)
 - High-voltage surge noise from inverters, motors, solenoids, etc.

Model No (Order Code) **P9000-01** (For the Memory HiCorder series, Wave only)
P9000-02 (For the Memory HiCorder series, Wave/RMS)

Connect to a Memory HiCorder's analog input terminal. Must be powered by an AC adapter, USB bus power, or other suitable power source. Please visit the Hioki website to see the number of P9000 probes that can be used when power is supplied from the standard USB terminal of the Memory HiCorder.

■ Basic specifications (Accuracy guaranteed for 1 year)

	P9000-01	P9000-02
Measurement functions	Waveform monitor output only Frequency characteristics DC to 10 MHz: ±3 dB	Waveform monitor output/AC RMS value output (variable) Wave mode frequency characteristics DC to 100 kHz: ±3 dB RMS mode frequency characteristics 20 Hz to 10 kHz; response time 300 ms (rising) or 500 ms (falling)
Division ratio	1000:1 or 100:1 (user selectable)	
DC amplitude accuracy	±0.5% (Ex. 1.0 V, voltage division ratio 1000:1) (Ex. = 0.5 V, voltage division ratio 100:1)	
RMS amplitude accuracy (P9000-02 only)	±0.5% (Ex. (30 Hz to 10 kHz) non-inclusive, sine wave), ±0.5% (Ex. (1 kHz to 10 kHz, sine wave))	
Input resistance, capacity	Between H and L: 10.5 MΩ, 5 pF or less (at 100 kHz)	
Max. allowable input	1000 V AC/DC	
Max. rated voltage to earth	1000 V AC/DC (CAT III)	
Operating temperature	-40 °C (-40 °F) to 80 °C (176 °F)	
Power supply	(1) AC Adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter) or 0.9 VA (probe only) (2) USB bus power (5 V DC, USB Micro-B receptacle), 0.8 VA To prevent an electric shock, when supplying power from the USB micro-B terminal, please supply from a device which GND of the GND terminal of the source device is grounded. (3) External power supply (2.7 V to 15 V DC)	
Dimensions and mass	128 mm (5.04 in)W × 36 mm (1.42 in)H × 22 mm (0.87 in)D, 170 g (6.0 oz)	
Included accessories	Card length: Input: 70 cm (2.30 ft); output: 1.5 m (4.92 ft) Instruction manual >1, alligator clips >2, carrying case >1	

Optional accessories		
AC ADAPTER Z1008	100 to 240 V AC	GRABBER CLIP L9243 Attaches to the tip of the probe plug cable. Red/Black 1 each, 30 cm (12 in) length. C013-0001
CONVERSION CABLE L1011-10	30 cm (0.98 ft) length, seven BNC to seven BNC	CONVERSION CABLE L1011-10 24 cm (0.87 ft) length, seven BNC to seven BNC
CONVERSION CABLE L1011-10	24 cm (0.87 ft) length, seven BNC to seven BNC	

3 Kinds of Measurements with a Single Probe

DIFFERENTIAL PROBE 9322



- Floating measurement of high-voltage waveforms (DC mode)
- Detection of power supply surge noise (AC mode)
- RMS rectified output (RMS mode)

Main Applications

- Measurement of potential differences included in common mode voltages, such as IGBT
- Measurement of commercial power line waveforms, such as on 400V power lines
- Measurement of high voltage surge noise waveforms
- Measurement of the RMS value of inverter outputs, etc.

Model No (Order Code) **9322** (For the Memory HiCorder series)


The Differential Probe 9322 cannot be used by itself. Please use it in combination with a Hioki Memory HiCorder. The Differential Probe 9322 requires a power supply.

* For the latest information about how to power the 9322 with a Memory HiCorder, please visit the Hioki website.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	DC mode: Waveform monitor output, DC to 10 MHz: ±3 dB AC mode: Detection of power line surge noise, 1 kHz to 10 MHz: ±3 dB (Low frequency cut-off frequency 1 kHz ± 300 Hz) RMS mode: Rectified RMS output of DC and AC voltages, DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC)
Max. allowable input	2000 V DC, 1000 V AC
Max. rated voltage to earth	When using the Grabber Clip L9243: 1000 V AC/DC (CAT II) When using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage division ratio: 1/1000, BNC terminal (DC or RMS 3-mode selectable output)
DC amplitude accuracy	±1% (Ex. (1000 V DC or less), ±3% (Ex. (2000 V DC or less) (Ex. = 2000 V DC))
RMS amplitude accuracy	±1% (Ex. (DC, 40 Hz to 1 kHz), ±4% (Ex. (1 kHz to 100 kHz) (Ex. = 1000 V AC))
Input resistance, capacity	Input: 9 MΩ, approx. 20 pF (Ex. at 100 kHz) H-case, L-case: 4.5 MΩ, approx. 20 pF (Ex. at 100 kHz)
Power supply	+5 to +12V, less than 300 mA. (DC jack OD 5.5 mm [0.22 in] ID 2.1 mm [0.04 in]) - Via AC adapter 9408-15 - Via M96000 dedicated Probe Power Unit 25021 through Power cord 9248 - Via Logic terminal on Memory HiCorder through Power cord 9326# - Via sensor terminal of PVU 8949# through Power cord 9254# - Via DC power output terminal attached to the input unit for the 8855 through Power cord 9328# - Via the 8850 series dedicated Probe Power Unit 9487# through Power cord 9248
Dimensions and mass	70 mm (2.76 in)W × 150 mm (5.91 in)H × 25 mm (0.98 in)D, 350 g (12.3 oz)
Included accessories	Alligator clips >1 (red/black set), Grabber clip L9243 >1 (red/black set), Carrying case C0203 >1, Instruction manual >1

= Discontinued product

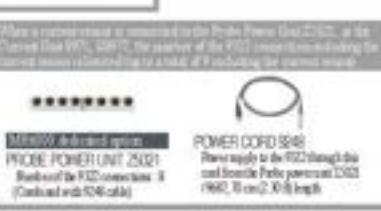

Recorders Peripherals

Recorder Peripherals

* For more information about compatible models, please see individual product catalogs.

Voltage measurement Type A	Voltage measurement Type B	Voltage measurement Type C	Voltage measurement Type D	Differential measurement	Logic measurement	Connection Cables	Recording Papers
* Input voltage is limited to the specification of the input module as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. CONNECTION CORD L9790 ALLIGATOR CLIP L9790-01 Flexible Ø 4.1 mm (Ø 16 in) thin dia., cable allowing for up to 400 V input, 1.5 m (5 ft 0 in) length, Red/Black set attaches to the ends of the cables L9790	* Input voltage is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. CONTACT PIN 9790-03 Red/Black set attaches to the ends of the cables L9790	* Input voltage is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. GRABBER CLIP 9790-02 Red/Black set attaches to the ends of the cables L9790 * Grabber clip is attached to the end of the L9790 input or limited to 100 P. Red/Black set.	* Input voltage is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. CONNECTION CORD L9190 Ø 3.0 mm (Ø 20 in) dia., cable allowing for up to 300 V input, 1.7 m (5 ft 7 in) length, small alligator clip				
* Input voltage is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. CONNECTION CORD L9197 Ø 3.0 mm (Ø 20 in) dia., cable allowing for up to 400 V input, 1.5 m (5 ft 0 in) length, a detachable large alligator clip set bundled	* Input voltage is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. GRABBER CLIP L9283 Attaches to the tip of the banana plug cable, Red/Black 1 each, 35 mm (1.38 in) length, CAT III 1000 V	* Max. rated voltage to earth is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules, Frequency characteristics DC to 100 MHz, 1.5 m (4 ft 11 in) length 10.1 PROBE 9665 Max. rated voltage to earth is limited to the specification of the input modules, Frequency characteristics DC to 100 MHz, 1.5 m (4 ft 11 in) length	* Max. rated voltage to earth is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules, Frequency characteristics DC to 300 MHz, 1.5 m (4 ft 11 in) length 10.1 PROBE 9666 Max. rated voltage to earth is limited to the specification of the input modules, Frequency characteristics DC to 300 MHz, 1.5 m (4 ft 11 in) length				
* Suitable options for M9300/9310/9311/9312 CONNECTION CABLE SET L4940 Banana plug - banana plug, 1.5 m (4 ft 9 in) length, red/black each 1	* Suitable options for M9300/9310/9311/9312 EXTENSION CABLE SET L4931 Banana plug - banana plug, 1.5 m (4 ft 9 in) length, expands the length of L4930/L4940, 1.5 m (4 ft 9 in) length	* Suitable options for M9300/9310/9311/9312 ALLIGATOR CLIP SET L4935 Attaches to the tip of the L4930/L4940, CAT II 1000 V, 35 mm (1.38 in) length, CAT III 1000 V	* Input voltage is limited to the specification of the input modules as per. * Max. rated voltage to earth is limited to the specification of the input modules as per. GRABBER CLIP L9243 Attaches to the tip of the Connection cord or cable, CAT II 1000 V, 35 mm (1.38 in) length				
* Measures input to ground real voltage (full "differential mode") * Will measure negative voltages if no effect on the measured signal levels DIFFERENTIAL PROBE P922 Forging to 2mV DC or 1mV AC. Use with AC Adapter 9418-15	* Measures input to ground real voltage (full "differential mode") * Will measure negative voltages if no effect on the measured signal levels AC ADAPTER 9418-15 100 to 240 V AC	* Measures input to ground real voltage (full "differential mode") * Will measure negative voltages if no effect on the measured signal levels DIFFERENTIAL PROBE P9000-01 (Waveform mode) For up to 1kV AC, DC	* Measures input to ground real voltage (full "differential mode") * Will measure negative voltages if no effect on the measured signal levels DIFFERENTIAL PROBE P9000-02 (Waveform/RMS mode) adjustable For up to 1kV AC, DC	* PC Card Protection Our only PC Cards satisfy IEC 60068-2-20. Compatibility and performance are not guaranteed for CP cards made by other manufacturers. This may be unable to read from or save data to such cards. PC CARD 2G 9100 2 GB capacity	* PC CARD 1G 9129 1 GB capacity	* PC CARD 512M 9128 512 MB capacity	
* 4-channel type, for voltage-related signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type) LOGIC PROBE 9326-01	* 4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type) LOGIC PROBE MR9321-01	* 4-channel type, for voltage-related signal ON/OFF detection (response pulse width 300 ns or more, miniature terminal type) LOGIC PROBE 9327	* Small terminal part of the R120 and MR9321-01, and R121 Large terminal part of the R120, and MR9321	* SD MEMORY CARD Z4001 2GB capacity SD MEMORY CARD Z4003 4GB capacity USB DRIVE Z4006 16 GB, Long-life, High-reliability SLC Flash Memory	* Large terminal part of the R120 and MR9321 can be connected to the domestic small Memory Hi-Corder model		
* Output cord, Ø 3.0 mm (Ø 20 in) dia., mini plug/banana, 1.5 m (4 ft 9 in) length OUTPUT CORD L9094	* Output cord, 2x100 series, 1.5 m (4 ft 9 in) length OUTPUT CORD L9095	* Output cord, 2x100 series, 1.5 m (4 ft 9 in) length OUTPUT CORD L9096	* Connection cord, BNC connector at both ends, use with terminal, 1.5 m (4 ft 9 in) length CONNECTION CORD 9165	* Connection cord, BNC to plug, 1.5 m (4 ft 9 in) length CONNECTION CORD 9166	* Conversion adaptor, female, output BNC (male), 1.5 m (4 ft 9 in) length CONVERSION ADAPTOR 9199	* Connection cord, BNC connector at both ends, 1.6 m (5 ft 2 in) length CONNECTION CORD L9217	* Straight Ethernet cable, supplied with straight-to-cross connection adapter, 5 m (16 ft 5 in) length LAN CABLE 9642
* For the M98800 (MP3000), 8860/8861 (8995-01), 8420/9122 (8992), 890709 (8992), 8807/50/8808-50 (8992), 8714/15 (8992), Roll type A with 0.2 mm (14 in) x 11 m (39 ft 4 in), 10 rollset RECORDING PAPER 9254	* For the 8804/05/06, 3193 (9604), 3194 (9604) Roll type, 74 mm (2.9 in) x 10 m (32 ft 8 in), 10 rollset RECORDING PAPER 9252	* For the MR8847A/MR8847/-10, 8827, 8860-50/8861-50 (8995), 8855/47/8454/542/8140 Roll type AA with 0.2 mm (14 in) x 10 m (39 ft 4 in), 10 rollset RECORDING PAPER 9251					
* For the 8805/8825 Roll type, 244 mm (9.6 in) x 10 m (32 ft 8 in), 4 rollset RECORDING PAPER 9229	* For the 8801 series, 8810 series, 8830 series, 8835 series, 8851/52/53, 8710, 3195, 3620 (8992) Roll type, 110 mm (4.33 in) x 10 m (32 ft 8 in), 10 rollset RECORDING PAPER 9221	* For the 8205 (-10), 8205 (10) Roll type, 74 mm (2.9 in) x 11 m (39 ft 2 in), 10 rollset RECORDING PAPER 9235	* For the 8205 (-10), 8205 (10) Clean re-mount cell type, 74 mm (2.9 in) x 11 m (39 ft 2 in), 10 rollset RECORDING PAPER 9236-01				
* For the PRB111/12, EPR-3000 series, EPR-3500 series, EPR-100 Folding, 179 mm (6.89 in) x 15 m (49.22 ft), 10 rollset RECORDING PAPER SE-107-2	* For the PRB111/12, EPR-3000 series, EPR-3500 series, EPT-100 Folding, 170 mm (6.73 in) x 20 m (65.62 ft), 10 rollset RECORDING PAPER SE-110	* For the PR-9000, PR-5000 Folding, 250 mm (9.44 in) x 31 m (14.84 ft), 1 book SIF-100XZ-05	* For the PR-5000 Folding, 250 mm (9.44 in) x 45 m (147.65 ft), 1 book SIF-10PZ-45	* For the FBR-250 series Folding, 230 mm (9.45 in) x 20 m (65.62 ft), 10 booklets SIG-107	* For the PSR-2101 Folding, 230 mm (9.45 in) x 20 m (65.62 ft), 10 booklets SH-03T-11		

Recorders Peripherals

Recorder Peripherals, Current Sensors

For more information about compatible models, please see individual product catalogues.

For high-precision current measurement

In order to use the high-precision current sensor, CT9555, CT9556, CT9557 and connection cord are required separately.

- The high-accuracy Amplitude Counter or CT9500 is required in order to use a high-precision current sensor equipped with ME15W (10-pA input) connected with the Current Monitoring Module. CT9500 is designed for use with the ME15W, ME1527 and ME1540.
- The high-accuracy Amplitude Counter or CT9500 and Oscilloscope CT9510 are required in order to use a high-precision current sensor equipped with ME15W (10-pA input) connected with the ME15W terminal and the CT9510. While the CT9500, CT9510, CT9511 are required in order to use a current sensor equipped with ME15W (10-pA input) connected with the ME15W terminal and the CT9510, the Oscilloscope CT9510 which comes with the ME15W is required for the best results.

INPUT UNITS FOR CURRENT SENSORS

CURRENT UNIT 8971

For ME15W, ME1527, ME1540

CONVERSION CABLE 9318

Connect current sensor equipped with PL23 (10-pA input) to ME15W (10-pA input) terminal.

ME15W (10-pA) - PL23 (10-pA input) conversion

CONNECTION CABLE CT9901

Connect ME15W (10-pA terminal) to PL23 (10-pA terminal).

For power supply required by high-precision current sensors, a separate power supply (CT9510 or other) is required in addition to a high-precision current sensor. Oscilloscopes with ME15W (10-pA input) connected with the ME15W terminal and the CT9510 are required in order to use the CT9500, CT9510, CT9511. The high-accuracy Amplitude Counter or CT9500 is required in order to use a current sensor equipped with PL23 (10-pA input).

POWER SUPPLY FOR Current Sensors

SENSOR UNIT CT9555

10A, with waveform output

SENSOR UNIT CT9556

10A, with waveform/ME15W output

SENSOR UNIT CT9557

4ch, with waveform/ME15W output

CONNECTION CORD L9217

Card has standard BNC connectors at both ends, 1.8 m (0.5 ft) length.

PL23 (10-pA) - ME15W (10-pA) conversion

CONNECTION CABLE CT9900

Connect PL23 (10-pA terminal) to ME15W (10-pA terminal).

Up to 6000 A (High precision)

Aggregate and measure large currents in multi-wire circuits.

Use multiple AC/DC Current Sensors CT6873A, with the Source Unit CT6877 to measure currents of up to 6000 A in multi-wire circuits.

AC/DC CURRENT SENSOR CT6877A

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz band width, 2000 A input, ±0.04% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal.

Up to 2000 A (High precision)

AC/DC CURRENT SENSOR CT6877A

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz band width, 2000 A input, ±0.04% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal.

Up to 1000 A (High precision)

AC/DC CURRENT SENSOR CT6875A

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1.1 MHz band width, 1000 A input, ±0.04% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal.

AC/DC CURRENT PROBE CT6846A

Measure the waveforms of DC or distorted AC current, DC to 100 kHz band width, 1000 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal.

Up to 500 A (High precision)

AC/DC CURRENT SENSOR CT6875A

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 2 MHz band width, 200 A input, ±0.04% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal.

AC/DC CURRENT PROBE CT6845A

Measure the waveforms of DC or distorted AC current, DC to 100 kHz band width, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal.

AC/DC CURRENT PROBE CT6845A

Measure the waveforms of DC or distorted AC current, DC to 200 kHz band width, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal.

Up to 200 A (High precision)

AC/DC CURRENT SENSOR CT6873

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 10 MHz band width, 200 A input, ±0.03% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal.

AC/DC CURRENT SENSOR CT6863-05

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 500 kHz band width, 200 A input, ±0.03% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal.

AC/DC CURRENT PROBE CT6843A

Measure the waveforms of DC or distorted AC current, DC to 700 kHz band width, 200 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal.

CLAMP ON SENSOR 9272-05

Observe waveforms of distorted AC just for DC, 1 Hz to 100 kHz band width, 200/50 A input, ±0.3% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal.

Up to 50 A (High precision)

AC/DC CURRENT SENSOR CT6872

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 50 MHz band width, 50 A input, ±0.03% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal.

AC/DC CURRENT SENSOR CT6862-05

High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz band width, 50 A input, ±0.03% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal.

AC/DC CURRENT PROBE CT6841A

Measure the waveforms of DC or distorted AC current, DC to 1 MHz band width, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal.

For easy measurement of AC/DC currents

To use these current sensors, a separate power supply (CT7200 or other) is required.

100 to 2000 A (Medium speed)

AC/DC CURRENT SENSOR CT7631 (AUTO-ZERO CT7731)

DC, 1 Hz to 10 kHz (D 100), 100 A, 1 mA/VA input

AC/DC CURRENT SENSOR CT7636 (AUTO-ZERO CT7736)

DC, 1 Hz to 10 kHz (D 100), 400 A, 1 mA/VA input

AC/DC CURRENT SENSOR CT7642 (AUTO-ZERO CT7742)

DC, 1 Hz to 10 kHz (D 100), 2000 A, 1 mA/VA input

DISPLAY UNIT CM7290

Measurement, display, signal output in combination with CT7600 series

DISPLAY UNIT CM7291

Built-in Bluetooth® wireless technology



For easy measurement of AC currents

Other than CT9567, separate power supply is not required.

500 A to 5000 A (for commercial power lines, 50/60 Hz)

CLAMP ON PROBE 9018-50

900A phase characteristics, Frequency characteristics: 40 Hz to 1 kHz, 10 to 500 A AC range, output 0.2 V AC/1A

CLAMP ON PROBE 9132-50

Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A, AC range, output 0.2 V AC/1A

AC FLEXIBLE CURRENT SENSOR CT9567-01-02-03

10 Hz to 20 kHz, 5000 A/500 A AC, 500 A/V output, ±100 to ±254 A/mm (3.94 to 10.00 in.), 100% diameter

For measurement of AC leak currents

Battery operated (long-term observations possible with separate power supply)

Leak Current 500 μA or commercial power lines, 50/60 Hz

AC LEAKAGE CLAMP METER CM4003

5 μA range (0 μA resolution) to 200 A range, with WAVEFORM output, CONNECTION CABLE L9397 (output terminal, BNC, power terminal, USB-C, 1.5 m (4.92 ft) length) is included

AC ADAPTER Z1013

100 V to 240 V AC

PC Software for Data Management

Measurement support software

MR6000 Viewer

Load measurement data on a computer to display waveforms and perform calculations.

- Take advantage of functionality similar to the MR6000 on a computer, including numerical calculations, waveform processing, and FFT calculations.
- Some functions limited.
- Ideal for report creation



Supported products (discontinued):
MR6000, MR6000-01, MR6007, MR6027, MR6040, MR6071

Available for download free of charge from Hioki's website.

Operating environment:

Computer running Windows 10 (32/64-bit)

For other information and system requirements, please see the user manual.

WAVE PROCESSOR 9335

Display, convert, calculate, and print waveforms with a PC

- Display waveform screens, X-Y graphs, and numerical results
- Rich printing and hard copy functions to assist in creating reports
- Save in CSV format and export to spreadsheet application (EXCEL)



PC Software

Supported products:
Model MR6000, MR6000-01, MR6007, MR6027, MR6040, MR6071, MR6075, MR6080, MR6090-50 (not compatible with dual time axis data), 8070, 8055, 8047, 8042, 8041, 8040, 8035-01, 8035, 8025, 8025, 8008, 8007, 8008-51, 8007-51 (excluding harmonic analysis function), MR6070, MR6071, MR6072, 8730, 8731, 8732, 8735, 8740, MR6070-50, MR6071-50, MR6072-50, 8730, 8731, 8732, 8735, 8740

Model No. (Order Code) 9335

Operating environment:

Computer running under Windows 10/8/7 (32/64-bit)

LAN COMMUNICATOR 9333

Remote control via LAN Memory HiCorders and PC Communications

- Auto save a waveform data to the PC
- Remote control with the PC via LAN
- Save in CSV format and export to spreadsheet application



Supported products:
Model MR6007-51/52/53, MR6080 (Ver. 1.00 or later), MR6090 (Ver. 3.02 or later), MR6075 (Ver. 2.12 or later), MR6084-01/02/03, 8047 (Ver. 3.07 or later), 8026 (Ver. 2.38 or later)

Model No. (Order Code) 9333

Operating environment:

Computer running under Windows 10/8/7 (32/64-bit), Vista (32-bit), XP

Other compatible software (third party)

FlexPro

FlexPro - Advanced Software for Analysis and Presentation of Memory HiCorder Data

- Search through large amounts of data at lightning fast speeds for the MEMORY HiCORDER Series
- Use your analyses on any number of measurements at the click of a button
- Share your analysis templates with colleagues over your network



Supported products: MR6000, MR6027, MR6040, MR6071, MR6075, LR8460, LR8432, LR8431, LR8410


Model FlexPro Software (third party)

More information: Weizang GmbH (Germany)
<http://www.weizang.com/>

OS-2000

OS-2000 - Freely edit large data that cannot be handled by Excel

- Freely edit large data that cannot be handled by Excel
- Simultaneously display the waveforms which have different frequencies

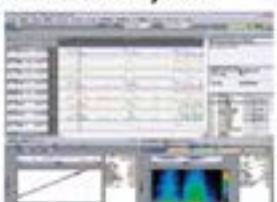

Supported products: MR6000, MR6000-01, MR6027, MR6040, MR6071, MR6075-51, MR6084-52, MR6084-53, MR6085, MR6086, MR6087

Model OS-2000 Software (third party)

More information: Otsu Zohki Co., Ltd. (Japan)
http://www.otsuzohki.co.jp/english/vj_products/trackball/os2000.htm

NI DIAdem

NI DIAdem - Analyze the data measured by Memory HiCorder

- Data management, display, analysis and report creation with interactive operation.
- Synchronous playback and analysis function of video and measurement data.



Supported products: MR6000, MR6000-01, MR6027, MR6040, MR6071, MR6075-51, MR6084-52, MR6084-53 (MR6090 is not supported), MR6085, MR6086, LR8400, LR8431, LR8402, LR8410, LR8416

Model NI DIAdem Software (third party)

FAMOS

FAMOS - The software for engineers, which can quickly analyze measured data

- Load, display, and analyze the data measured by Memory HiCorder.
- Generate a report.
- More than 400 function libraries, like a FFT.



Supported products: MR6000, MR6000-01

(Download a free MR6000 import filter free of charge from Hioki's website.)

Model FAMOS Software (third party)

More information: See Test & Measurement Gmbh (Germany)
<http://www.tmg-de.com/>

Data Loggers/Data Acquisition

Identify Fungal Growth Rate at a Glance! Prevent Fungal Occurrence in Business Critical Locations

WIRELESS FUNGAL LOGGER LR8520



Bluetooth®

*Humidity sensor is sold separately.
(Sensor guaranteed for 1 year.)

- High-precision >3% rh humidity sensors
- Calculate and display fungal index* and growth prediction
- Measure temperature and humidity other than fungal index and growth prediction
- Compact 1ch logger (Temperature-Humidity each 1 ch input)
- Download measurement data to a tablet or computer with Bluetooth® wireless technology or capture in real time with the LRB410
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) LR8520 (Humidity sensor is sold separately)

*Fungal index was proposed by the late Keiko Abe, Doctor of Agriculture

(Japanese Patent Number 2710900).

The LR8520 alone is not capable of making measurements - please also purchase applicable sensor.

Only the temperature and humidity sensors affect the measurement accuracy and are subject to calibration.

The LR8520 logger does not require calibration.

For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioke website.

Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKIEE CORPORATION.

Data can be downloaded using Hioke's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector.



Basic specifications

Functionality	[Used as standalone product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal (Download app from Google Play) *Communication range varies with the performance of the computer or tablet: (up to line-of-sight distance of roughly 30 m)
Number of channels	1 temperature channel + 1 humidity channel (Humidity sensor Z2010 or Z2011 is required (sold separately))
Display items	Temperature, humidity, fungal index (0 to 200), growth prediction (5 levels)
Measurable range	[Temperature] -40°C to 80°C, Range 100°C f.s., Max. resolution 0.1°C [Humidity] 0% to 100% RH, Range 100% RH f.s., Max. resolution 0.1% RH
Measurement accuracy	[Temperature] ±0.5 °C (10°C to 60°C), If outside above temperature range: Add 0.015 °C/°C (-40 °C to 10 °C) or 0.02 °C/°C (60 °C to 80 °C) [Humidity] ±3% RH (20°C to 30 °C, 20% to 90% RH), Hysteresis: ±1% RH (Added to the humidity measurement accuracy)
Other functions	Measurement value, Date, Time, Number of recorded data, Maximum value, Minimum value, Average value, Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.5 sec to 30 sec, 1 min to 60 min, 14 selections
Power supply	AC Adapter Z2003 (100 to 240V AC, 50/60 Hz), AA alkaline batteries (LR6) × 2, External power 5 to 13.5 V DC (can also be supplied from USB host power via a conversion cable)
Continuous operating time	3.5 months (Recording interval of 1 sec, Bluetooth® OFF), 20 days (Recording interval of 1 sec, Bluetooth® ON), 5 days (Recording interval of 0.1 sec, during real-time measurement with the LRB410)
Dimensions and mass	85 mm (3.35 in) W × 63 mm (2.48 in) H × 31 mm (1.22 in) D (Excluding protrusion), 95 g (3.3 oz) (Not including the battery)
Included accessories	CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector) × 1, Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2, Connection cable L1010 × 1

Other options	ADAPTER Z2003 100 to 240V AC	MAGNETIC STRAP 25004 1.5m (4.92 ft)	CONNECTION CABLE L1010 1.5m (4.92 ft)	HUMIDITY SENSOR Z2010 1.0m (3.28 ft)	HUMIDITY SENSOR Z2011 1.5m (4.92 ft)
---------------	---------------------------------	--	--	---	---

Easy, wireless collection of a variety of data types, Voltage and K and T thermocouple input with a single device

WIRELESS VOLTAGE/ TEMP LOGGER LR8515



Bluetooth®

*Temperature sensor is sold separately

- A single device to measure everything from the minute voltages of pyranometers or heat flow sensors to battery voltage to temperature
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology or capture in real time with the LRB410
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) LR8515 (2 ch, sensor is sold separately)

For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioke website.

Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKIEE CORPORATION.

Data can be downloaded using Hioke's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector.



Basic specifications (Humidity guaranteed for 1 year)

Functionality	[Used as standalone product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal (Download app from Google Play) *Communication range varies with the performance of the computer or tablet: (up to line-of-sight distance of roughly 30 m)
Number of channels	2 ch (selected, select voltage or thermocouple for each channel), Input terminals: M3 screw type terminal block
Measurement items	Voltage/ Thermocouple (K, T)
Maximum input voltage	±50 V DC, Max. inter-channel voltage 60 V DC
Measurement range	[Voltage] ±50 mV to ±50 V, Max. resolution 0.1 mV [Thermocouple] -200 °C to 999.9 °C, Thermocouple (K, T), Max. resolution 0.1 °C
Measurement accuracy	[Voltage] ±0.05 mV (50 mV range) [Thermocouple] ±0.8 °C (Thermocouple K, -100 °C to 999.9 °C) Reference junction compensation: Adjustable between internal and external Reference junction compensation accuracy: ±0.3 °C (When using external compensation, add to the temperature measurement accuracy) Temperature characteristics: AA (maximum test accuracy: ±0.1 °C) is maximum accuracy
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.1 to 30 sec, 1 to 60 min, 16 selections
Power source	AC Adapter Z2003 (100 to 240V AC, 50/60 Hz), AA alkaline batteries (LR6) × 2, External power DC5 V to 13.5 V (can also be supplied from USB host power, with a conversion cable)
Continuous operating time	2.5 months (Recording interval of 1 min, Bluetooth® OFF), 7 days (Recording interval of 1 sec, Bluetooth® OFF), 2 days (Recording interval of 0.1 sec, during real-time measurement with the LRB410)
Dimensions and mass	85 mm (3.35 in) W × 75 mm (2.95 in) H × 38 mm (1.50 in) D, 126 g (4.4 oz) (Not including the battery)
Included accessories	CD-R (Instruction Manual, Logger Utility, Wireless Logger Collector), Measurement Guide × 1, Caution for Using Radio Waves × 1, AA alkaline batteries (LR6) × 2

Other options	AC ADAPTER Z2003 100 to 240V AC	MAGNETIC STRAP 25004
---------------	------------------------------------	----------------------

Data Loggers/Data Acquisition

Easy, wireless collection of a variety of data types; ideal for managing environmental temperature and humidity at production plants and agricultural sites

WIRELESS HUMIDITY LOGGER LR8514



*Temperature and humidity sensor is sold separately
(Sensor guaranteed for 1 year)



- High-precision, ±3% RH humidity sensor
- Convenient for simultaneously recording and comparing temperature and humidity readings at 2 locations
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology or capture in real time with the LR8410
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) LR8514 (2 ch, sensor is sold separately)

Note: The LR8514 alone is not capable of making measurements.
Only the temperature and humidity sensors affect the measurement accuracy and are subject to calibration.
The LR8514 logger does not require calibration.
For the latest information about countries and regions where wireless operation is currently supported, please visit the [Hioki website](#).

Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices).
Search for "Hioki" and download the Wireless Logger Collector.



Basic specifications

Functionality	Used as standalone product (Data collected manually) Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal Software can be downloaded free of charge from Google Play® Communication range varies with the performance of the computer or tablet (up to line-of-sight distance of roughly 30 m) Used as logging module (Real-time measurement) Device can be used as an LR8410 logging module to record and display data in real time and to control up to 7 units. Communication distance: 30 m
Number of channels	2 ch for temperature + 2 ch for humidity (2 sensors can be attached)
Measurement items	Temperature, Humidity
Measurable Range	[Temperature] -40 °C to 80 °C, Range 100°C Es., Max. resolution 0.1°C [Humidity] 0 to 100% RH, Range 100% RH Es., Max. resolution 0.1%RH
Measurement accuracy	[Temperature basic accuracy] ±0.5 °C (30 to 60 °C) at outside temperature range A4 (0.015 °C/40 to 10 °C) or 0.017 °C/°C (60 to 80 °C) [Humidity basic accuracy] ±3% RH (20 to 30 °C, 20 to 60% RH), Hysteresis: ±1% RH (Added to the humidity measurement accuracy)
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Soring, Recording operation hold function, Erroneous operation prevention, Channel recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.5 to 30 sec, 1 to 60 min, 14 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time	3.5 months (Recording interval of 1 min, Bluetooth® OFF), 20 days (Recording interval of 1 sec, Bluetooth® ON), 5 days (Recording interval of 0.5 sec, during real-time measurement with the LR8410)
Dimensions and mass	85 mm (3.35 in) W × 61 mm (2.40 in) H × 31 mm (1.22 in) D (Excluding protrusions), 95 g (3.4 oz) (Not including the battery)
Included accessories	CD-R ×1 (Instruction Manual, Logger Utility, Wireless Logger Collector, Measurement Guide ×1, Caution for Using Radio Waves ×1, AA alkaline batteries (LR6) ×2



Measure load current and leak current easily with clamp sensors

WIRELESS CLAMP LOGGER LR8513



*Clamp sensor is sold separately
(Sensor guaranteed for 1 year)



- Measure AC and DC load current and AC leak current
- Choose from many current sensors
- Place inside a distribution panel, close the cover, and monitor measured values from the outside
- Measure power easily—just set the voltage and power factor
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology or capture in real time with the LR8410
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) LR8513 (2 ch, sensor is sold separately)

Note: The LR8513 alone is not capable of making measurements.
For the latest information about countries and regions where wireless operation is currently supported, please visit the [Hioki website](#).


Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices).
Search for "Hioki" and download the Wireless Logger Collector.



Basic specifications (Accuracy guaranteed for 1 year)

Functionality	Used as standalone product (Data collected manually) Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal Software can be downloaded free of charge from Google Play® Communication range varies with the performance of the computer or tablet (up to line-of-sight distance of roughly 30 m) Used as logging module (Real-time measurement) Device can be used as an LR8410 logging module to record and display data in real time and to control up to 7 units. Communication distance: 30 m
Number of channels	2 ch (common GND)
Measurement items	AC load current, DC load current, AC leak current (using current sensor)
Effective value calculation	Software calculates the true RMS value
Measurement range	500.0 mA to 5000 A AC, 10.0 A to 2000 A DC (By current sensor) *Current and leak current that occur simultaneously cannot be measured.
Measurement accuracy	±0.5% rdg ±5 digit (DC, AC 50/60 Hz) Add the sensor's accuracy when the current sensor is connected
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Soring, Recording operation hold function, Erroneous operation prevention, Channel recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value, average value, maximum value [Interval] 0.5 to 30 sec, 1 to 60 min, 14 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time	3 months (Recording interval of 1 min, Bluetooth® OFF), 10 days (Recording interval of 1 sec, Bluetooth® ON), 5 days (Recording interval of 0.5 sec, during real-time measurement with the LR8410)
Dimensions and mass	85 mm (3.35 in) W × 75 mm (2.95 in) H × 30 mm (1.18 in) D, 130 g (4.6 oz) (including the battery)
Included accessories	CD-R ×1 (Instruction Manual, Logger Utility, Wireless Logger Collector, Measurement Guide ×1, Caution for Using Radio Waves ×1, AA alkaline batteries (LR6) ×2

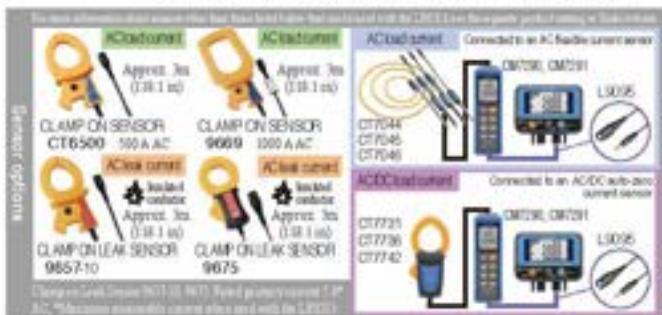

Data Loggers/Data Acquisition

Perform Pulse Integration of Vehicle Speed or Flow Rate for Equipment Such as Air Conditioners

WIRELESS PULSE LOGGER LR8512



*Bundled accessory (L1010)
Not covered by warranty

- For pulse totalization and measuring logical ON/OFF signals or revolutions
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology or capture in real time with the LR8410
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 12.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) LR8512 (Q-46)

For the latest information about countries and regions where wireless operation is currently supported, please visit the [HIOKI website](#).

Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKIEE CORPORATION.

■ Data can be downloaded using HIOKI's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector.



CONNECTION CABLE L1010
1.5 m (4 ft 11.8 in) length



AC ADAPTER Z2003
100 to 240V AC



MAGNETIC STRAP Z5004

■ Basic specifications (Accuracy guaranteed for 1 year)

Functionality	[One or standard product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal Software can be downloaded free of charge from Google Play) *Communication range varies with the performance of the computer or tablet up to a line-of-sight distance of roughly 30 m)
Number of channels	2ch (common GND)
Measurement items	Integrating (cumulative instant), Revolution, Logic (Records a 1/0 for each recording interval)
Supported input format	Non-voltage "a" contact (Always-on contact input), open collector, or voltage input (DC 0 to 50 V)
Measurement range	[Totalization] 0 to 3000 M pulse, Max. resolution 1 pulse, [No. of revolution] 0 to 3000/n [rev], Max. resolution 1/n [rev]
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.1 to 30 sec, 1 to 60 min, 16 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 12.5 V DC (cannot be applied from USB bus power, with a conversion cable)
Continuous operating time	2 months (Recording interval of 1 min, Bluetooth® OFF), 14 days (Recording interval of 1 sec, Bluetooth® OFF), 5 days (Recording interval of 0.1 sec, during real-time measurement with the LR8410)
Dimensions and mass	15 mm (0.59 in) W × 61 mm (2.40 in) H × 31 mm (1.22 in) D, 350 g (14 oz) (including battery)
Included accessories	CD-R ×1 (Instruction Manual, Logger Utility, Wireless Logger Collector), Measurement Guide ×1, Caution for Using Radio Waves ×1, AA Alkaline batteries (LR6) ×2, Connection cable L1010 ×2

Compact & Lightweight Heat Flow Logger for Analyzing the Causes of Temperature Change

HEAT FLOW LOGGER LR8432



- Use a heat flow sensor to measure the movement and volume of heat energy
- Measure of temperature and voltage
- Record measurement data on a USB flash drive for easy transfer to a computer
- Record to reliable Compact Flash cards during long-term measurement applications for increased peace of mind
- Ten isolated analog input channels
- 10 ms sampling and recording across all channels
- Record raw waveforms and post-calculation waveforms at the same time. (Heat transmission coefficient processing)
- Two graduations can be displayed with a double gauge

Model No. (Order code) LR8432-20 (Q-46, English model)

Note: The LR8432-20 is not bundled with the Battery Pack #9780. Thermocouples are not provided by HIOKI, and must be purchased from a separate vendor.

Note: Use only HIOKI CF cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-HIOKI CF cards or USB memory sticks is not guaranteed.

■ Basic specifications (Accuracy guaranteed for 1 year)

Specialized functions for heat flow measurement	<ul style="list-style-type: none"> Easy scaling settings: directly enter the sensitivity of the heat flow sensor Calculations: waveform processing function for the analysis of temperature and heat flow (Simple average, moving average, integration, heat transmission coefficient, integration with numerical calculations)
Analog inputs	<p>[No. of channels] 10 isolated analog channels using scanning input method (MD mm dia. screw terminal block)</p> <p>Voltage measurement range: ±10 mV to ±10 V, ±5V, Max. resolution 500 µV</p> <p>Temperature (thermocouple) -200 °C to 1800 °C (depending on sensor), thermocouples (K, J, E, T, N, R, S, B), Max. resolution 0.1 °C</p> <p>Humidity not available</p> <p>Max. allowable input: 60 V DC</p> <p>Max. rated voltage between input channels [Max. rated voltage to earth]: 30 AC/Vrms, 60 V DC (max. voltage between input channel terminals, and from terminals to chassis ground without damage)</p>
Pulse inputs	<p>[No. of channels] 4 pulse input channels (Requires CONNECTION CABLE 9441, all pulse inputs share common ground with the main unit)</p> <p>Totalized pulses: 0 to 1000M (Hz), Non-voltage "a" contact, open collector or voltage input, Max. resolution 1 pulse</p> <p>(Rotation count) 0 to 50000 (Hz), Resolution 1/s (Hz) * n = pulses per rotation (1 to 1,000)</p> <p>Max. allowable input: 6 to 10 V DC</p> <p>[Max. rated voltage between input channels] [Max. rated voltage to earth] Non-isolated</p>
Recording intervals	10 ms to 1 hour, 19 selections (All input channels are scanned at high speed during every recording interval)
Selectable filters	50 Hz, 60 Hz, or OFF (Setting of high frequency on analog channel)
Memory capacity	Internal storage: 3.5 Mwords, External storage: CF card or USB memory stick (only HIOKI CF cards are guaranteed for correct operation)
External interface	USB 2.0 mini-B receptacle ×1, Function: Control from a PC, Transfers files from the installed CF card to a PC (just insert filter from the connected USB memory stick to a PC via USB connection), Data copy between CF card and USB memory stick
Display	4.3-inch WQVGA-TFT color LCD (640 × 272 dots)
Functions	Save data to the CF Card or USB memory stick in real-time, Numerical Calculations, etc.
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA Max. (including AC adapter), 10 VA Max. (max. load only)
	Battery Pack #9780: Continuous use 2.5 hours (22°C/77°F), 3 VA Max. External power source: 10 to 16 V, 10 VA Max. (please contact HIOKI distributor for the cable, length: 3 m/9.84 ft cable length)
Dimensions and mass	176 mm (6.9 in) W × 301 mm (11.8 in) H × 41 mm (1.61 in) D, 550 g (19.4 oz) (Battery Pack #9780 not included)
Included accessories	Measurement Guide ×1, CD-R (Instruction manual PDF, Logger Utility Instruction Manual PDF, Data acquisition application program Logger Utility) ×1, USB cable ×1, AC Adapter Z1005 ×1

Other options: refer to the detailed catalog



BATTERY PACK #9780
NIMH, Chargeable
maximum 100 mAh

Other options: refer to the detailed catalog



SOFT CASE 9812
(includes space for small items, Neoprene fabric)

Other options: refer to the detailed catalog



CARRYING CASE 9862
Includes compartment for options, Easy control

Other options: refer to the detailed catalog




CONNECTION CABLE
9441
Rear input, 15 m (49.2 ft)
length

Other options: refer to the detailed catalog




PROTECTION SHEET
9809
For LCD pressure part of
installed deck


Other options: refer to the detailed catalog



PC CARD 2G 9830
2 GB capacity



PC CARD 1G 9729
1 GB capacity



PC CARD 512M 9728
512 MB capacity

Only PC Cards sold by HIOKI. Compatibility and performance levels are guaranteed by PC card made by other manufacturers. You may be unable to read stored data to such cards.

Data Loggers/Data Acquisition

Logging Multi-point Data Has Never Been So Easy with a Data Wireless Logger

WIRELESS LOGGING STATION LR8410



LR8410-20 Main unit

LR8610
(Sold separately)



Card bundled:



LAN/
USB



- Capture logging data using Bluetooth® wireless technology. Install logging modules in hard-to-reach locations (over line-of-sight distances of up to 30 meters^{††})
(^{††}The presence of obstacles may shorten the range. In addition, radio wave attenuates, which are indicated with the antenna-like indicators, vary depending on units even while these units are operating in the same environment.)
- Measurement units have built-in buffer memory so that measurement data can be saved if communication is temporarily disrupted.
- Choose an input unit based on the parameters you wish to measure (15-channel and 2-channel units are available).
- Easily add up to 7 input units wirelessly to keep your environment free of tangled wires (for a total of up to 105 channels when using 15-channel units).
- 100 msec simultaneous sampling across all channels using rapid scanning method.
- Quick Set guide makes configuration a breeze.
- Can receive data from LR8410 Link compatible products (Ver. 1.40 or later).

Model No. (Order Code) LR8410-20 (English model, main unit only)

The LR8410-20 does not capable of making measurements. One or more input modules are necessary to measure. The measurement and input modules are not bundled with the Battery Pack Z1007. Thermocouples are not provided by HIOKI, and must be purchased from an accurate vendor.
Max. Use only 20100220 memory card, which is manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-HIOKI SD cards or USB memory sticks are not guaranteed.
Module LR8510 in LR8410 may only be used in countries in which they have been certified.
These products emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Use in countries or regions other than those listed above may constitute a violation of law, exposing the operator to legal penalties.
The Bluetooth® word mark and logo are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI ELECTRIC CORPORATION is under license.
*For the latest information about countries and regions where wireless operation is currently supported, please visit the [Hello website](#).

■ Basic specifications (Accuracy guaranteed for 1 year)

No. of measurement channels	Connect up to seven LR8510 series units wirelessly (using Bluetooth® wireless technology) to measure or collect data from up to 105 channels.
Pulse, Digital input	2 pulse input channels or 2 digital input channels (when using the LR8512)
Recording intervals	100 msec, 1 sec, 200 ms to 1 hour, 16 selectable (All input channels are scanned within each recording interval) (*2) Setting not available when the thermocouple burst detection setting is on
Data storage	Internal memory: 33M-words, Data storage media: SD memory card or USB memory stick (Only data recorded to a genuine HIOKI SD memory card is guaranteed)
Interface	LAN: 100BASE-TX, USB: USB 2.0 series mini-B receptacle ×1
Display device	5.7 inch TFT color liquid crystal display (640 × 480 pixels)
Functions	Save waveform data in real time to the SD memory card or USB memory stick, Statistical value calculations, Waveform calculations, 4ch alarm output (not isolated, common ground), and others
Power supply	[AC adapter] Using the AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 0.5 VA Max. (including AC adapter), 15 VA Max. (exclusive of AC adapter) [External battery] Using the Battery Pack Z1007 (optional accessory), 3 hours of continuous use (4.2 °C reference data), 7.4 V Max. [External power] 10 to 28 V DC, 15 VA Max. (Prior contact with HIOKI distributor for connection and)
Dimensions and mass	230 mm (9.06 in) W × 125 mm (4.92 in) H × 26 mm (1.42 in) D, 700 g (24.7 oz) (including Battery Pack)
Included accessories	Instruction manual ×1, Measurement guide ×1, SD Memory Card (2GB) Z4991 ×1, CD-R (data collection software "Logger Utility") ×1, USB cable ×1, AC Adapter Z1008 ×1

■ LR8510 Basic specifications

Measurement parameters	[No. of channels] 15 analog channels; isolated scanning method input (2 channels M1 to M15) [Voltage] 40 mV to 4000 V AC, 1 sec, max. 500 V resolution [Temperature] Thermocouple: -200 °C to 2000 °C (depends on sensor), Thermocouple (K, T, or manganin), max. 0.01 °C resolution Not available for Pt100, Pd100, 100 series [Resistance] [Humidity] [Max. rated voltage between isolated input channels] 300 V DC [Max. allowable input] ±100 V DC [Max. rated voltage from isolated terminal to ground] 300 V AC, DC
Power supply	[AC adapter] Using the AC adapter Z1008 (100 to 240 V AC, 50/60 Hz), 23 VA Max. (including AC adapter), 77 VA Max. (exclusive of AC adapter) [External battery] Using the Battery Pack Z1007 (optional accessory), 24 hours of continuous use (4.2 °C reference data), 200 °C reference data), 120 hours of continuous use (8 °C reference data), 23 °C reference data), 0.4 VA Max. [External power] 10 to 28 V DC, 17 VA Max.

■ LR8511 Basic specifications

Measurement parameters	[No. of channels] 15 analog channels; isolated scanning method input (2 channels M1 to M15) [Voltage] 40 mV to 4000 V AC, 1 sec, max. 500 V resolution [Temperature] Thermocouple: -200 °C to 2000 °C (depends on sensor), Thermocouple (K, T, or manganin), max. 0.01 °C resolution [Temperature] Pt100, Pd100, 100 series: 0.01 °C resolution (not isolated between channels) [Resistance] 0 to 200 G ohm, max. 0.5 mΩ resolution (not isolated between channels) [Humidity] 50 to 95.0% relative humidity (not isolated between channels), 0.1% h resolution (not isolated between channels) [Max. rated voltage between isolated input channels] 300 V DC [Max. allowable input] ±100 V DC [Max. rated voltage from isolated terminal to ground] 300 V AC, DC
Power supply	Same as the LR8510

Input modules <p>WIRELESS VOLTAGE/TEMP UNIT LR8510 Datalogger M-3 function Type: 15 channels, Voltage, temperature with thermocouple</p>	<p>WIRELESS UNIVERSAL UNIT LR8511 Analog push button type: 15 channels, Voltage, temperature with thermocouple, pressure, resistance temperature sensor, humidity, or resistance measurement</p>	<p>WIRELESS PULSE LOGGER LR8512 2ch, pulse/No of revolution/ logic measurement, for the LR8410</p>	<p>WIRELESS CLAMP LOGGER LR8513 2ch, AC and DC load current/AC break current measurement</p>	<p>WIRELESS HUMIDITY LOGGER LR8514 2 ch temperature/2 ch humidity recording</p>	<p>WIRELESS VOLTAGE/TEMP LOGGER LR8515 2 ch voltage / thermocouple (K, T) recording</p>	<p>WIRELESS FUNGAL LOGGER LR8520 Record fungal data, with probe, temperature and humidity</p>	<p>SD MEMORY CARD Z4991 Up to 32 MB sold by Z1003 Compatibility and performance are not guaranteed. 32MB sold by other manufacturers. This may be useful to analyze or save data collected.</p>
<p>HUMIDITY SENSOR Z2000 3 m (9.8 ft) length</p>	<p>BATTERY PACK Z1007 Li-ion, charge while installed</p>	<p>AC ADAPTER Z1009 100 to 240V AC</p>	<p>CARRYING CASE C1007 Holds one LR8410 meter and four measurement units</p>	<p>FIXED STAND Z1009 For wall hanging and fixed bench mounting</p>	<p>PC SOFTWARE CONNECT ONE SF4000 Application for Windows</p>	<p>LAN CABLE 9642 Single Unshielded, applied at single end connection type, 3 m (4.9 ft) length</p>	<p>USB DRIVE Z4995 16 GB capacity</p>

Data Loggers/Data Acquisition

1ms Sampling Portable Logger Expandable to 120 Channels with Your Choice of Plug-in Modules MEMORY HiLOGGER LR8450

Recorders



LR8450 Main unit installed with U8552+U8550



- Expandable to 120 ch with wired/plug-in modules
- Record voltage output from pressure and other sensors with 1ms sampling speed
- Directly connect strain gauge and measure signals in as fast as 1ms intervals
- Significantly reduced effects from noise let you safely measure in high voltage and high frequency areas such as around inverter motors

Model No. (Order Code) **LR8450** (Standard model, main unit only)

(Note) Measurement is not possible with the LR8450 only. One or more plug-in units are required (sold separately).

■ Basic specifications (Accuracy guaranteed for 1 year)

Max. number of connectable modules	4 plug-in input modules
Connectable modules (Plug-in modules)	U8550, U8551, U8552, U8553, U8554, U8555, U8556
No. of measurement channels	Up to 120 ch with plug-in input modules (U8555 can input up to 500 channels per unit) (Number of ch) 8 ch (analog/DI, one-isolated, multivolt setting for pulse/LOG inputs for individual channel) (Adaptive input format) Non-voltage contact, open collector, or voltage input (Count) 0 to 1000 M pulse, 1 pulse resolution (Rotational speed) 0 to 50000 rpm, 16 bit (16) resolution, 0 to 300,000 rev/min., 16 bit (16) resolution, n: Number of pulses per rotation (1 to 1000) (Log input) Records 1 or 0 for each recording interval
Pulse/LOG input	1 ms *, 2 ms *, 5 ms *, * Can be set only when using 1 ms U8550 module), 10 ms to 1 hour, 22 ms intervals (Data refresh interval can be set for each unit)
Recording intervals	SD Memory Card/USB Drive (user-settable) (Only storage media sold by Hioki) are guaranteed for operation
Data storage	100BA32-5X / 100BA32-T, DH19, DNS support. Functions: Data acquisition, condition settings used with the Logger Utility software, configuration settings and controlling recording using communication commands, FTP server / IP client, HTTP server, Email transmission, NTP client.
LAN interface	Serial A receptacle × 2, USB 2.0 compliant (USB drive, keyboard, or host) Serial mini-B receptacle × 1, Data acquisition, condition settings used with the Logger Utility, configuring settings and controlling recording using communication commands, transferring data from a connected SD Memory Card to a computer
USB interface	SD card slot: SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support). Guaranteed operation options: ZA001, ZA003
Display	7 inch TFT color liquid crystal display (WVGA 800 × 480 pixels)
Functions	Show waveform data in real time to the SD memory card or USB drive, numerical value calculations, waveform calculations, I/O alarm output, voltage output × 2 (5 V/12 V/24 V selectable)
Power supply	[AC adapted] Using the ZB04 (100 V to 240 V AC, 50 Hz/60 Hz, 5.5 VA Max. (including AC adapter), 20 VA Max. (excluding AC adapter)) (Battery Pack) Using the ZB007 (maximum 2 hours), continuous use 4 hr (reference value for 2 pieces), 20 VA Max. (External power) 10 V to 30 V DC, 28 VA Max. (Please contact us for HIOKI distributor for connection and)
Dimensions and mass	Without any modules: 272 mm (10.7 in) W × 145 mm (5.7 in) H × 43 mm (1.7 in) D (excluding protrusion), 1100 g (2.4 lb) (excluding Battery Pack) With 1 module: 272 mm (10.7 in) W × 190 mm (7.5 in) H × 63 mm (2.48 in) D (excluding protrusion) With 4 modules: 272 mm (10.7 in) W × 252 mm (9.9 in) H × 63 mm (2.48 in) D (excluding protrusion)
Included accessories	Quick Start Manual × 1, LOO-00R Application Disc (Quick Start Manual, Instruction Manual, Logger Utility, Logger Utility Instruction Manual, CAN editor, CAN editor instruction manual, Communication Instruction Manual) × 1, ZB008 Cable × 1, AC Adapter ZB014 × 1

1ms Sampling Portable Logger Expandable to 330 Channels with Your Choice of Wireless and Plug-in Modules

MEMORY HiLOGGER LR8450-01 (Wireless LAN model)



LR8450-01 Main unit installed with U8552+U8550



- Wireless LAN model expandable to 330 ch with wireless and plug-in modules
- Record voltage output from pressure and other sensors with 1ms sampling speed
- Directly connect strain gauge and measure signals in as fast as 1ms intervals
- Significantly reduced effects from noise let you safely measure in high voltage and high frequency areas such as around inverter motors
- Avoid wiring issues by minimizing cable length using wireless units
- Monitor data captured remotely on PC with wireless LAN technology

Model No. (Order Code) **LR8450-01** (Wireless LAN equipped model, main unit only)

The LR8450 and LR8450-01 cannot perform measurement as their own. One or more plug-in modules or wireless modules are required (sold separately).

Note: The LR8450-01 and wireless modules emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Using it in a country or region other than those indicated may violate the law and may result in legal penalties for the operator.

Note: For the latest information about countries and regions where wireless spectrum is currently supported, please visit the Hioki website.

■ Basic specifications (Accuracy guaranteed for 1 year)

Max. number of connectable modules	4 plug-in input modules + 7 wireless input modules
Connectable modules (Plug-in modules)	U8550, U8551, U8552, U8553, U8554, U8555, U8556
Connectable modules (Wireless modules)	LR8550, LR8551, LR8552, LR8553, LR8554, LR8555, LR8556
No. of measurement channels	Up to 120 ch with plug-in input modules, up to 230 ch with plug-in input modules and wireless input modules (U8555 and LR8555 can input up to 500 channels per unit) (Number of ch) 8 ch (analog/DI, one-isolated, multivolt setting for pulse/LOG inputs for individual channel) (Adaptive input format) Non-voltage contact, open collector, or voltage input (Count) 0 to 1000 M pulse, 1 pulse resolution (Rotational speed) 0 to 50000 rpm, 16 bit (16) resolution, 0 to 300,000 rev/min., 16 bit (16) resolution, n: Number of pulses per rotation (1 to 1000) (Log input) Records 1 or 0 for each recording interval
Pulse/LOG input	1 ms *, 2 ms *, 5 ms *, * Can be set only when using 1 ms U8550 module), 10 ms to 1 hour, 22 ms intervals (Data refresh interval can be set for each unit)
Recording intervals	SD Memory Card/USB Drive (user-settable) (Only storage media sold by Hioki) are guaranteed for operation
Data storage	100BA32-5X / 100BA32-T, DH19, DNS support. Functions: Data acquisition, condition settings used with the Logger Utility software, configuration settings and controlling recording using communication commands, FTP server / IP client, HTTP server, Email transmission, NTP client.
LAN interface	IEEE 802.11b/g/n Communication range: 30 m, line of sight Encryption function: WPA-PSK/WPA2-PSK, ECF98-E2 Usage channel: 1 to 11 Supported modes: Wireless unit connecting to access point, station Functions: Configuring settings and controlling recording using communication commands, FTP server / IP client, HTTP server, NTP client.
Wireless LAN interface	Serial A receptacle × 2, USB 2.0 compliant (USB drive, keyboard, or host) Serial mini-B receptacle × 1, Data acquisition, condition settings used with the Logger Utility, configuring settings and controlling recording using communication commands, transferring data from a connected SD Memory Card to a computer
USB interface	SD card slot: SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support). Guaranteed operation options: ZA001, ZA003
Display	7 inch TFT color liquid crystal display (WVGA 800 × 480 pixels)
Functions	Show waveform data in real time to the SD memory card or USB drive, numerical value calculations, waveform calculations, I/O alarm output, voltage output × 2 (5 V/12 V/24 V selectable)
Power supply	[AC adapted] Using the ZB04 (100 V to 240 V AC, 50 Hz/60 Hz, 5.5 VA Max. (including AC adapter), 20 VA Max. (excluding AC adapter)) (Battery Pack) Using the ZB007 (maximum 2 hours), continuous use 4 hr (reference value for 2 pieces), 20 VA Max. (External power) 10 V to 30 V DC, 28 VA Max. (Please contact us for HIOKI distributor for connection and)
Dimensions and mass	Without any modules: 272 mm (10.7 in) W × 145 mm (5.7 in) H × 43 mm (1.7 in) D (excluding protrusion), 1100 g (2.4 lb) (excluding Battery Pack) With 1 module: 272 mm (10.7 in) W × 190 mm (7.5 in) H × 63 mm (2.48 in) D (excluding protrusion) With 4 modules: 272 mm (10.7 in) W × 252 mm (9.9 in) H × 63 mm (2.48 in) D (excluding protrusion)
Included accessories	Quick Start Manual × 1, LOO-00R Application Disc (Quick Start Manual, Instruction Manual, Logger Utility, Logger Utility Instruction Manual, CAN editor, CAN editor instruction manual, Communication Instruction Manual) × 1, ZB008 Cable × 1, LAC Adapter ZB014 × 1, Permissible Operating Use of Equipment that Radio Radio Waves (LR8450-01 only) × 1

Data Loggers/Data Acquisition

Common options for LR8450 and LR8450-01

Pluggable modules

Data Loggers



STRAIN UNIT
U8554
Strain, voltage, strain gauge
transducer, 5 ch, 1 ms sampling

UNIVERSAL UNIT
U8551
Voltage, Temperature (thermocouple),
Humidity, Pt100/1000, J/Pt100, Resistance,
15 ch, 10 ms sampling

VOLTAGE/TEMP UNIT
U8552
Voltage, temperature (thermocouple),
humidity, 10 ch, 20 ms sampling, 10 ms when
the number of channels used is 15 or less

HIGH SPEED VOLTAGE UNIT
U8553
Voltage, 5 ch, 1 ms sampling

CAN UNIT
U8555
CAN/CAN FD input and output switchable,
2 ports, max. sampling 10 ms (up to 50 ch),
Up to 500 ch (at 100 ms)

CURRENT MODULE
U8556
Current 5 ch (instantaneous, RMS value),
1 ms sampling

Connected directly to the LR8450/01

Wireless modules



WIRELESS STRAIN UNIT
LR8534
Strain, voltage, strain gauge
transducer, 5 ch, 1 ms sampling

WIRELESS CAN UNIT
LR8535
CAN/CAN FD input and output switchable,
2 ports, max. sampling 10 ms (up to 50 ch),
Up to 500 ch (at 100 ms)

WIRELESS CURRENT MODULE
LR8536
Current 5 ch (instantaneous, RMS value),
1 ms sampling

WIRELESS HIGH SPEED VOLTAGE UNIT
LR8533
Voltage, 5 ch, 1 ms sampling

Input options



HUMIDITY SENSOR
Z2000
3 m (9.84 ft) length



Thermocouple
For reference only.
Please purchase locally.

For CAN module



NON-CONTACT CAN
SENSOR SP7001-95
Supports CAN FD/CAN
signals, SP7001, SP9218,
SPT150 set



CAN CABLE 8712-01
For U8556/LR8536,
improved version model,
1.8 m (5.9 ft) length

LOGGER UTILITY and CAN EDITOR are bundled software



LOGGER UTILITY
SF1000
Control the measurement of
loggers and collect data in
real-time



CAN EDITOR
SF1002
Software for CAN test
messages



LAN CABLE
9642
Straight Ethernet cable, supplied
with straight-to-male connectors
at both ends; 3 m (10 ft) length

Storage media



SD MEMORY CARD 2GB Z4001
3 GB capacity



SD MEMORY CARD 8GB Z4008
8 GB capacity



USB DRIVE Z4006
16 GB, Long life, High reliability SLC
Flash Memory

Precaution on purchasing memory device

Use only the memory device sold by HIOKI.
Compatibility and performance are not guaranteed
for memory device made by other manufacturers.
You may be unable to read from or save data to such
devices.

Current sensors



AC/DC CURRENT SENSOR
CI7812
20A AC/DC, ϕ 5 mm (0.20 in) core dia.,
cord length: 4 m (13.12 ft) (between
sensor and multiplexer)



AC/DC CURRENT SENSOR CI7822
20A AC/DC, ϕ 5 mm (0.20 in) core dia.,
cord length: 4 m (13.12 ft) (between
sensor and multiplexer)



AC/DC AUTO-ZERO CURRENT
SENSOR CI7731
100A AC/DC, ϕ 38 mm (1.50 in) core
dia., cord length: 2.5 m (8.20 ft)




AC/DC AUTO-ZERO CURRENT
SENSOR CI7734
600A AC/DC, ϕ 38 mm (1.50 in) core
dia., cord length: 2.5 m (8.20 ft)



AC/DC AUTO-ZERO CURRENT
SENSOR CI7742
2000A AC/DC, ϕ 65 mm (2.17 in) core
dia., cord length: 2.5 m (8.20 ft)



AC LEAKAGE CURRENT
SENSOR CI7116
60A AC, ϕ 40 mm (1.57 in) core
dia., cord length: 2.5 m (8.20 ft)



AC CURRENT SENSOR
CI7126
100A AC, ϕ 15 mm (0.59 in) core
dia., cord length: 2.5 m (8.20 ft)



AC CURRENT SENSOR
CI7131
100A AC, ϕ 15 mm (0.59 in) core
dia., cord length: 2.5 m (8.20 ft)



AC CURRENT SENSOR
CI7136
600A AC, ϕ 46 mm (1.81 in) core
dia., cord length: 2.5 m (8.20 ft)



AC FLEXIBLE CURRENT
SENSOR CI7044
6000A AC, ϕ 100 mm (3.94 in) core
dia., cord length: 2.5 m (8.20 ft)



AC FLEXIBLE CURRENT
SENSOR CI7045
6000A AC, ϕ 100 mm (3.94 in) core
dia., cord length: 2.5 m (8.20 ft)



AC FLEXIBLE CURRENT
SENSOR CI7046
4000A AC, ϕ 254 mm (10.00 in) core
dia., cord length: 2.5 m (8.20 ft)

Connected directly to the LR8450/01 or PC/USB connected with the measurement unit

Battery supply



BATTERY PACK
Z1007
For LR8450 and
LR8450-01 and
wireless modules



AC ADAPTER
Z1014
For LR8450 and
LR8450-01,
100 to 240V AC



AC ADAPTER
Z1008
For wireless modules,
100 to 240V AC



POWER CABLE L1012
For main unit, DC drive,
Connect to external
battery, Unplugged ends,
Approx. 2 m (6.6 ft)

Carrying case / Stand



CARRYING CASE
C1012
Holds the main unit, 4
plugs/modules and 7
wireless modules



FIXED STAND
Z5040
For installing logger
on wall

Bundled with Wireless unit



WIRELESS LAN ADAPTER
Z3230
Connected to a wireless unit

Data Loggers/Data Acquisition

Featuring USB Flash Drive and Improved Accuracy! Your Personal 10-channel Logger

MEMORY HILOGGER LR8431



- Record measurement data on a USB flash drive for easy transfer to a computer
- Record to reliable Compact Flash cards during long-term measurement applications for increased peace of mind
- Replace storage media during real-time recording
- Improved thermocouple measurement accuracy and reference junction compensation accuracy
- Ten isolated analog input channels
- 10 ms sampling and recording across all channels
- Noise-resistant measurement circuitry for improved readings
- Ultra-compact for convenient portability
- Widescreen, bright LCD gives excellent viewability

Model No. (Order Code) **LR8431-20** (10 ch, English model)

Note: The LR8431-20 is not bundled with the Battery Pack 9780. Thermocouples are not provided by HIOKI.

Note: Must be purchased from a separate vendor.

Note: Use only HIOKI CF cards, which are manufactured to strict industrial standard, for long-term storage of important data. Correct operation of non-HIOKI CF cards or SD memory sticks is not guaranteed.

■ Basic specifications (Accuracy guaranteed for 1 year)

Analog inputs	[No. of channels] 10 isolated analog channels using scanning input method (MD sum dia. non-terminal block) [Voltage measurement range] ±100 mV to ±60 V, 1.5V, Max. resolution 500 μV [Temperature: thermocouples] -200 °C to 1800 °C (depending on sensor), thermocouples (K, J, E, T, H, R, S, B), Max. resolution 0.1 °C [Humidity] not available [Max. allowable input] 60 V DC [Max. rated voltage between input channel] [Max. rated voltage to earth] 10 AC/Vrms, 40 V DC [max. voltage between input channel terminals, and from terminals to chassis ground without damage]
Pulse inputs	[No. of channels] 4 pulse input channels (requires CONNECTION CABLE 9641, all pulse inputs share common ground with the main unit) [Sustained pulses] 0 to 10000 (count) (No voltage if contact, open collector or voltage input), Max. resolution 1 pulse [Rotation count] 1 to 99999 (step), Resolution 1s (step) * 1 = pulses per rotation (1 to 1,000) [Max. allowable input] 0 to 10 V DC [Max. rated voltage between input channel] [Max. rated voltage to earth] Non-isolated
Recording intervals	10 ms to 1 hour, 10 selections (All input channels are scanned at high speed during every recording interval)
Selectable filters	50 Hz, 60 Hz, or OFF (digital filtering of high frequencies on analog channels)
Memory capacity	Internal storage: 3.5M words, External storage: CF card or USB memory stick (only HIOKI CF cards are guaranteed for correct operation)
External interface	USB 2.0 mini-B receptacle × 1, Functions: Control from a PC, Transfer files from the installed CF card to a PC (cannot transfer files from the connected USB memory sticks to a PC via USB connection), Data copy between CF card and USB memory stick
Display	4.3-inch WxGA-TFT color LCD (480 × 272 dots)
Functions	Save data to the CF Card or USB memory stick in real time, Numerical Calculations, etc.
AC Adapter 21005	100 to 240 VAC (50/60 Hz), 30 VA Max. (including AC adapter), 10 VA, Max. (main unit only)
Battery Pack 9780	Continuous use 2.5 hours (22°C/77°F), 3 VA Max. External power supply: 10 to 100 V, 10 VA, Max. (please contact HIOKI distributor for cable, less than 1 m/3.3 ft cable length)
Dimensions and mass	176 mm (6.9 in) W × 101 mm (3.9 in) H × 41 mm (1.6 in) D, 550 g (1.4 lb) (Battery Pack 9780 not included)
Included accessories	Measurement Guide >1, CD-R (Instruction manual PDF, Logger Utility Instruction Manual PDF, Data acquisition application program Logger Utility) >1, USB cable >1, AC Adapter 21005 >1

Options: refer to the detailed catalog.



BATTERY PACK 9780
Main, Chargeable, installed in the main unit



SOFT CASE 9612
Includes space for small items, Hinges w/ rubber



CARRYING CASE 9612
Includes compartments for options, Trim coated



CONNECTION CABLE 9641
For pulse input, 1.5 m (4.9 ft) length




PROTECTION SHEET 9609
For LCD protection, pair of additional sheet



PC CARD 2G 9830
2 GB capacity

PC CARD 1G 9729
1 GB capacity

PC CARD 512M 9728
512 MB capacity



SD Card 128MB 9830
128 MB PC Card holder
HIOKI compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be able to read from or write data to such cards.

Introducing a Modular Data Logger, Engineered for Use in Embedded Applications

DATA LOGGER LR8101, LR8102



LR8102 main unit with ten M7100 Voltage/Temp modules (solid blue) attached.



■ Basic specifications (Accuracy guaranteed for 1 year)

	LR8101	LR8102
Maximum number of module connections	10	
Maximum number of synchronizable loggers	N/A	10 (Requires optical connection cable)
Power supply	AC adapter, AC Adapter Z1016 (operates on 12 V DC ±10%) External power supply: 10 VDC to 18 VDC	
Operating temperature and humidity range	-40°C to 50°C (34°F to 122°F), 80% RH or less (non-condensing)	
Number of LAN ports	1	2
Communication interface	[LAN] Functionality: Collecting data and setting recording conditions using Logger Utility Setting the central IP address using Logger Utility Setting and controlling recording using communication commands Manually acquiring data using an FTP Server Automatically reading data via FTP (FTP client) HTTP server function, TCP/IP or Ethernet (TCP), NTP direct function	[LAN] Functionality: TCP/IP or Ethernet (UDP) Measurement data can be output by UDP
External media	USB Drive, Operation guaranteed: Z4004 (24-GB) SD memory card/SDHC memory card supported, Operation guaranteed: Z4001 (1 GB), Z4003 (6 GB)	
External control terminal	Relay logic input (1), External sampling input (1), External input and output (2), Alarm input (1), GND terminal (5), CAN interface (2)	Relay logic input (1), External sampling input (1), External input and output (2), Alarm input (1), GND terminal (5), CAN interface (2)
Dimensions and weight	WxHxD: Approx. 166H × 218D mm (6.5W × 6.5H × 8.4D in) (excluding protruding parts), Approx. 1.5 kg (3.3 lbs) Without M7100 installed: Approx. 154W × 166H × 260D mm (5.3W × 6.5H × 10.4D in) (excluding protruding parts) With ten M7100 installed: Approx. 520W × 166H × 260D mm (24.4W × 6.5H × 10.4D in) (excluding protruding parts)	
Included accessories	Operating Instructions >1, Startup Guide >1, DVD >1 (Startup Guide, Instructions Manual, Logger Utility, Logger Utility Instructions Manual, CAN Editor, CAN Editor Instructions Manual, Communication Command Instructions Manual)	

Model No. (Order Code) **LR8101** (Main unit only, standard model)

LR8102 (Main unit only, advanced model)

Note: The LR8101 and LR8102 cannot be used alone. They must be combined with one or more measurement modules (sold separately).

This product does not include an AC adapter. An AC Adapter Z1016 or the Power Cable L1012 must be purchased separately.

For data storage, choose either the HIOKI SD Memory Card Z4001 (1 GB), SD Memory Card Z4003 (6 GB), or the USB Drive Z4006 (16 GB). (Not necessary when acquiring data in real time to a PC.) Thermocouples are not provided by HIOKI, and must be purchased from a separate vendor.



VOLTAGE/TEMP MODULE M7100
• For 400 V to 1500 V battery packs
• 100s, voltage and temperature (thermocouple) measurement
• High-speed data capture, output of data for all cells at an interval of short as 1 ms, HSI support (refer to using LR8102)



VOLTAGE/TEMP MODULE M7102
• For 400 V or lower battery packs
• 100s, voltage and temperature (thermocouple) measurement
• Ideal for standalone battery cell testing and test conductor bars in testing



OPTICAL CONNECTION CABLE L6101 (1 m (3.3 ft))
L6102 (1 m (3.3 ft))
OPTICAL CONNECTION CABLE
- Redundant coupling among multiple loggers (optical connection). Use when performing measurements across multiple Data Logger LR8101's/redundancy. Our optical connection cables are required for rack logger.




CAN CABLE 9713-01
Upgrades at one end, 1.5 m (5 ft)
CAN BUS
- CAN connectivity. CAN connects data with automotive about external devices such as a battery management system (BMS). Our CAN cable is required for rack logger.




AC ADAPTER Z1016
100 V to 240 V AC
For main and DC drive, Connected to external power, Unregulated/built-in, Approx. 2 m (6.6 ft)



POWER CABLE L1012
For main and DC drive, Connected to external power, Unregulated/built-in, Approx. 2 m (6.6 ft)



LAN CABLE 9642
Straight Ethernet cable, supplied with straight-to-cross conversion adapter, 5 m (16.4 ft) length



SD MEMORY CARD 2GB 24001
2 GB capacity



SD MEMORY CARD 24003
1 GB capacity

Data Loggers/Data Acquisition

Transfer Data from a LR5000 Series Data Logger to PC

**COMMUNICATION ADAPTER LR5091
DATA COLLECTOR LR5092**



LR5091
(USB cable is bundled)



LR5092
(USB cable is bundled)



- Bring the data logger LR5000 series back from the field and transfer data to a PC
- Save data from data loggers in the built-in memory or on an SD card (LR5092-20)
- Send settings from a PC to a data logger
- Use the included software to easily graph and print data
- Use the included software to calculate maximum, minimum, and average values and more between cursors

Model No. (Order Code) LR5091 (For the LR5000 series)
LR5092-20 (For the LR5000 series)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

*Users note: Transferring data from the LR5000 series Logger to a PC

(1) Place the LR5000 series Logger on the Communication Adapter LR5091 and connect the adapter to the computer with a USB cable.

(2) Take the Data Collector LR5092 to the location where the Data Box was placed and capture the data via optical communications. Transfer data from the device to a PC with the SD card or connect with a USB cable.



SD Card Precaution
Use only SD Cards with 100% compatibility and performance are not guaranteed for SD cards made by other manufacturers. It may be easier to read from or use data in such cards.

LR5000 Utility (PC communication software; included)

Table and graph display, data analysis, data processing, transmission of settings to data loggers, print functionality, etc.

*The utility can also display data collected using the Data Logger 3636 series

■ Basic specifications

	LR5091	LR5092-20
Function	Transfer data from a data logger to a PC Send settings and the time from a PC to a data logger.	Send data from a data logger to the internal memory or an SD card, then display a graph. Send settings and the time from the internal memory or SD card to a data logger. Send data from a data logger to a PC. Send settings and the time from a PC to a data logger.
Communication method	Between data loggers: Infrared communication With PC: USB 2.0	Between data loggers: Infrared communication With PC: USB 2.0
Display	N/A	Data logger setting conditions Collected data (list, graph, values, etc.)
Internal memory capacity of data	N/A	60,000 data elements × 1ch (maximum value mode) 15,000 data elements × 1ch (statistical value mode) Data logger settings (max. 100)
Removable storage media	N/A	SD Memory card Save data and menu. 30 items configuration
Power supply	USB bus power	DC 3V (LR5091 AA Alkaline battery × 2) USB bus power (2 hours × 100 sets of data collection)
Dimensions and mass	83 mm (3.27 in)W × 61 mm (2.40 in)H × 19 mm (0.75 in)D, 43 g (1.5 oz)	PI mm (3.58 in)W × 54 mm (2.16 in)H × 31 mm (1.22 in)D, 215 g (7.6 oz) (excluding battery and SD memory card)
Included accessories	USB cable (1m) × 1, CD (Application software "LR5000 Utility") × 1	Instruction manual × 1, Operation guide × 1, LR5091 AA Alkaline battery × 2, USB cable (1m) × 1, CD (Application software "LR5000 Utility") × 1

■ LR5000 Utility Specifications

Operating environment	OS: Windows 7 (32bit), .NET Framework 2.0 or more, Vista (32bit), SP1 or more, XP (SP2 or more) *USB interface (when using the Communication Base 36109111, a COM port is required)
Function	<ul style="list-style-type: none"> Settings: Communicate via infrared light with LR5000 series loggers to send and receive settings. Graph function: Displays graphs of up to 16 channels, displays statistical data, etc. Print function: Print graphs, Print statistical data. Export function: (data CSV output, paste into Excel) Import function: Loads text files from the Clamp On Power HI Tester 3636-20 [only demand parameter with a recording interval of at least 1 sec.] Processing of data: Scaling, Power calculation, Energy cost calculation, Operating ratio calculation, Integration, Dew point temperature, Calculate between channels

Easily Record Load Current of 50Hz/60Hz Lines and Leak Current CLAMP LOGGER LR5051



*Clamp sensor is sold separately
(Sensor warranted for one year)



- Easily mount the light weight, pocket-sized loggers in tight spaces
- Easy to see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity compared to predecessor (Records 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

Model No. (Order Code) LR5051 (2ch, clamp sensor is sold separately)

Note: The Clamp Logger LR5051 may be affected by high-frequency noise while measuring leak current. Please contact HIOKI for more information if you plan to use the instrument in an environment where it would be subject to the effects of high-frequency noise.

Customers using the previous Model 3636-20 Clamp Logger should note that the LR5051 can only record 13,000 points of average data, vs. 12,000 data points available in the 3636-20.

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	AC Current 2 channels (used with the optional current sensor; load current 2ch, leak current 2ch, or load & leak each 1ch) Current, Current and leak current that occur intermittently cannot be measured.
Measurement range	500.0 mA to 1000 A AC rms, 5 range (depends on current sensor in use)
Basic accuracy	±2.0% ±dig. ±0.1% F·S (rms and % current sensor accuracy) at 500.0 A range, 10/10 Hz Note: Basic accuracy is typical value, only max. accuracy: ±0.2%dig. ±dig. max added clamp sensor accuracy refer to the detailed catalog
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data with
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
Recording modes	Instantaneous recording: At every recording interval. Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval.
Recording methods	One-line recording: Stop recording when the memory capacity is full End-line recording: Continue recording even when the memory capacity is full (80 data in memory) Stat. Logger button operation or scheduled time Stop. Logger button operation or scheduled time, or auto-stop when the memory capacity is full (instantaneous recording)
Other functions	Always backs up latest recorded data, backs up recorded data and setting conditions when battery power is low, guarantees approx. 30 sec. of recording operation and clock while battery is replaced
Waterproof and dust-proof	N/A
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR5 (AA) Alkaline battery × 2, Battery life: Approx. 1 year (instantaneous recording, with 1-minute interval and auto power saving at 20 °C), Approx. 1 month (instantaneous recording, with 1-second interval at 20 °C)
Dimensions and mass	79 mm (3.11 in)W × 70 mm (2.76 in)H × 37 mm (1.46 in)D, 165 g (5.8 oz)
Included accessories	LR5 (AA) Alkaline battery (built-in internal) × 2, Instruction manual × 1, Operation guide × 1

Clamp On Sensor (CT6500, 9605)		CLAMP ON SENSOR 9605-02		CLAMP ON LEAK SENSOR 9675		CONNECTION CABLE 9219	
Attachment	Approx. 3m (11 ft)	Attachment	Approx. 3m (11 ft)	Attachment	Approx. 3m (11 ft)	Attachment	Isolated
CLAMP ON SENSOR CT6500 500 AAC		CLAMP ON SENSOR 9605-02 50 AAC		CLAMP ON LEAK SENSOR 9675-01		CLAMP ON LEAK SENSOR 9675	
DATA COLLECTOR LR5092-20		DATA COLLECTOR LR5092-20		MAGNETIC STRAP Z5020 Extra strength			
DATA LOGGER LR5000		DATA LOGGER LR5000		CLAMP ON LEAK SENSOR 9675-01		CLAMP ON LEAK SENSOR 9675	
DATA LOGGER LR5000		DATA LOGGER LR5000		Rate privacy limit: *1 AAC		Rate privacy limit: *1 AAC	
DATA LOGGER LR5000		DATA LOGGER LR5000		Rate privacy limit: *1 AAC		Rate privacy limit: *1 AAC	

Data Loggers/Data Acquisition

Record Instrumentation Signals and Measure Analog Output from Sensors and other Devices

VOLTAGE LOGGER

(50mV) LR5041, (5V) LR5042, (50V) LR5043



*Bundled accessory (LR9801)
Not covered by warranty

IP54
(splash-proof construction)

- Easily mount the light-weight, pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity than predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

■ Basic specifications (Accuracy guaranteed for 1 year)

	LR5041	LR5042	LR5043
Measurement items	DC voltage 1ch	DC voltage 1ch	DC voltage 1ch
Measurement range	-50.00 to 50.00 mV	-5.000 to 5.000 V	-50.00 to 50.00 V
Accuracy	$\pm 0.5\%$ rdg ± 5 digit		
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data		
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections		
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval		
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)		
Other functions	Pre-heat function (requires external power supply during use of function), Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced		
Waterproof and dust-proof	IP54 (EN60529) (with connection cable connected, but not including cable tip)		
Interfaces	Infrared optical communications with LR5091, LR5092-20		
Power supply	LR6 (AA) Alkaline battery $\times 1$, Battery life: Approx. 2 years (Instantaneous recording, with 1-second interval and auto power saving, at 20 °C), Approx. 2 months (Instantaneous recording, with 5-second interval at 20 °C)		
Dimensions and mass	79 mm (L11 in)W = 57 mm (2.246 in)H = 28 mm (1.10 in)D, 105 g (3.7 oz)		
Included accessories	LR6 (AA) Alkaline battery (built-in internal) $\times 1$, Connection cable LR9802 $\times 1$, Instruction manual $\times 1$, Operation guide $\times 1$, Kickstand $\times 1$		

Model No. (Order Code) LR5041 (±50mV DC)
LR5042 (±5V DC)
LR5043 (±50V DC)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.



For 4-20 mA Instrumentation Measurement

INSTRUMENTATION LOGGER LR5031



*Bundled accessory (LR9801)
Not covered by warranty

IP54
(splash-proof construction)

- 4 - 20 mA DC measurement only
- Easily mount the light-weight, pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity than predecessor (Record 60,000 data per channel)
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

■ Basic specifications (Accuracy guaranteed for 1 year)

	DC current (0 - 40)	for instrumentation
Measurement range	-30.00 to 30.00 mA	
Accuracy	$\pm 0.5\%$ rdg ± 5 digit	
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data	
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections	
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval	
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)	
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced	
Waterproof and dust-proof	IP54 (EN60529) (with connection cable connected, but not including cable tip)	
Interfaces	Infrared optical communications with LR5091, LR5092-20	
Power supply	LR6 (AA) Alkaline battery $\times 1$, Battery life: Approx. 2 years (Instantaneous recording, with 1-second interval and auto power saving, at 20 °C), Approx. 2 months (Instantaneous recording, with 5-second interval at 20 °C)	
Dimensions and mass	79 mm (L11 in)W = 57 mm (2.246 in)H = 28 mm (1.10 in)D, 105 g (3.7 oz)	
Included accessories	LR6 (AA) Alkaline battery (built-in internal) $\times 1$, Connection cable LR9802 $\times 1$, Instruction manual $\times 1$, Operation guide $\times 1$, Kickstand $\times 1$	

Model No. (Order Code) LR5031 (mA DC, 1ch)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.



Data Loggers/Data Acquisition

Measure Temperature with External Sensor

TEMPERATURE LOGGER LR5011



*Optional sensor (LR9504)
Not covered by warranty



IP54
(splash-proof construction)

- Easily mount the light-weight, pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity than predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

Model No. (Order Code) LR5011 (Temperature 1ch)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Temperature 1ch (with optional sensor)
Measurement range	-40.0 °C to 80.0 °C *Depends on measurement range of sensor
Basic accuracy	±0.5 °C (main unit + sensor accuracy, at 0.0 to 25.0 °C) Note: Basic accuracy is typical value, refer to the detailed catalog
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval
Recording modes	
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced
Waterproof and dust-proof	IP54 (EN60529) (with sensor connected, but not including sensor tip)
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR6 (AA) Alkaline battery ×1, Battery life: Approx. 2 years (Instantaneous recording, with 1-second interval at 20 °C), Approx. 2 months (Instantaneous recording, with 1-second interval at 20 °C)
Dimensions and mass	79 mm (3.11 in)W × 57 mm (2.24 in)H × 28 mm (1.10 in)D, 105 g (0.7 oz)
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×1, Instruction manual ×1, Operation guide ×1, Kickstand ×1



Record Temperature and Humidity Simultaneously

HUMIDITY LOGGER LR5001



*Bundled sensor (LR9504)
Not covered by warranty



IP54
(splash-proof construction)

- Easily mount the light-weight, pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- Note: Recording is interrupted during battery replacement if the battery is very weak. After batteries are replaced, recording resumes automatically. Previously recorded data is not lost during battery replacement.
- 7 times the memory capacity than predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

Model No. (Order Code) LR5001 (Temperature / Humidity each 1ch)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Temperature 1ch and Humidity 1ch (Requires included or optional humidity sensor)
Measurement range	Temperature: -40.0 to 85.0 °C, Humidity: 0 to 100 % rh *at sensor environment
Basic accuracy	[Temperature]: ±0.5 °C (main unit + sensor accuracy, at 0.0 to 25.0 °C) [Humidity]: ±5% rh (main unit + temperature / humidity sensor LR5001 / LR5002/LR9504/LR9504 combination, at 20 to 30 °C / 10 to 50% rh) Note: Basic accuracy is typical value, refer to the detailed catalog
Storage capacity	Instantaneous value mode: 60,000 details, Statistical value mode: 15,000 details
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low Note: After batteries are replaced within 30 seconds, recording resumes automatically. Recording is interrupted during battery replacement.
Waterproof and dust-proof	IP54 (EN60529) (with sensor connected, but not including sensor tip)
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR6 (AA) Alkaline battery ×1, Battery life: Approx. 3 months (Instantaneous recording, with 1-second interval at 20 °C), Approx. 20 days (Instantaneous recording, with 1-second interval at 20 °C) (typical data: Approx. 1 year recording with 10-minutes interval)
Dimensions and mass	79 mm (3.11 in)W × 57 mm (2.24 in)H × 28 mm (1.10 in)D, 105 g (0.7 oz)
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×1, Humidity sensor LR9504 ×1, Instruction manual ×1, Operation guide ×1, Kickstand ×1



Choose from 5 Models

A complete product line to fully meet your measurement frequency and applications.



Photo IM7581



Photo IM7585

A rich lineup covering a wide range of measurement frequencies



3 GHz High Frequency Testing

IMPEDANCE ANALYZER IM7587



- 1 MHz to 3 GHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- 0.07% measured value variability (When measuring a 1 mH coil at 3 GHz)
- ±0.65% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) IM7587-01 (Connection cable 1 m is bundled)
IM7587-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.



■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (sweep with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, R, Rs (ESR), Rp, X, G, B, Cx, Cp, Ls, Lp, D (tanδ), Q
Measurable range	100 mΩ to 5 kΩ
	Z: 0.00 m to 9.99999 GΩ / Rs, Rp, X, Y, G, B: ± (0.00 m to 9.99999 GΩ) Ls, Lp: ± (0.00000 m to 9.99999 GHz) / Q: ± (0.00 to 9999.99) 0: ± (0.00° to 360.00°), Cx, Cp: ± (0.00000 p to 9.99999 GHz) D: ± (0.00000 to 9.99999), Y: (0.000 m to 9.99999 GΩ) G, B: ± (0.000 m to 9.99999 GΩ), Δ%: ± (0.000 % to 999.999 %)
Basic accuracy	Z: ±0.65% rdg, 0: ±0.38°
Measurement frequency	1 MHz to 3 GHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mV rms Current: 0.09 mA to 10.04 mA rms
Output impedance	50 Ω (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FASTE: 0.5 msec (Analog measurement time, typical value)
Functions	Contact check, Comparator, IIN measurement (classification), Panel loading learning, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GPIB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in) W × 200 mm (7.87 in) H × 360 mm (13.78 in) D, 8.0 kg (17.62 lb) Test head: 90 mm (3.54 in) W × 64 mm (2.52 in) H × 24 mm (0.94 in) D, 300 g (0.53 lb)
Included accessories	Test head × 1, Connection cable × 1, Instruction manual × 1, LCR application disc (Communication user manual) × 1, Power cord × 1



TEST FIXTURE
IM9202
Combination use with the
IM9200



SMD TEST FIXTURE
IM9201
Combination use with the
IM9200



TEST FIXTURE STAND
IM9200
Includes magnifying glass
11mm (0.43 in) thick
(0.35 in) diameter



ADAPTER (0.5mm²)
11mm (0.43 in) thick
(0.35 in) diameter



CALIBRATION KIT
IM9905
Open short load set



GP-IB
INTERFACE
Z3000



GP-B
CONNECTOR
CABLE 9151-02
2 m (6.56 ft) long



RS-232C
INTERFACE
Z3001



RS-232C CABLE
9152-07
For PC, 9 pin - 9 pin,
cm, 1.8 m (5 ft) length

Impedance Analyzers/LCR Meters

Fastest Measurement Time of 0.5ms and Measurement Stability of 0.07% to Boost Your Production Volume

IMPEDANCE ANALYZER IM7585



- 1 MHz to 1.3 GHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- 0.07% measured value variability (when measuring at 10Hz)
- ±0.6% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) IM7585-01 (Connection cable 1 m is bundled)
IM7585-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (swept with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, G, R _s (ESR), Rp, X, G, B, Cs, Cp, L _s , L _p , D (tanδ), Q
Measurable range	100 mΩ to 5 kΩ
Display range	Z: 0.00 m to 9.99999 GΩ / Rx, Rp, X: ±(0.00 m to 9.99999 GΩ) L _s , L _p : ±(0.0000 n to 9.99999 GH) / Q: ±(0.00 to 9999.99) G: ±(0.0000 p to 9.99999 GF) / D: ±(0.0000 to 9.99999 %) / Y: (0.000 n to 9.99999 GS) / B: ±(0.000 n to 9.99999 GS), d%: ±(0.000 % to 999.999 %)
Basic accuracy	Z: ±0.65 %rdg, R: ±0.3%
Measurement frequency	1 MHz to 1.3 GHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 500 mVrms Current: 0.09 mA to 10.04 mArms
Output impedance	50 Ω (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	ENAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, DIN-measurement classification, Peak loading/holding, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GPIB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in) W × 200 mm (7.87 in) H × 340 mm (13.78 in) D, 8.0 kg (18.1 lb) Test head: 90 mm (3.54 in) W × 64 mm (2.51 in) H × 24 mm (0.94 in) D, 300 g (10.56 oz)
Included accessories	Test head × 1, Connection cable × 1, Instruction manual × 1, LCR application disc (Communications user manual) × 1, Power cord × 1



Fastest Measurement Time of 0.5ms to Boost Your Production Volume

IMPEDANCE ANALYZER IM7583



- 1 MHz to 600 MHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- ±0.6% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) IM7583-01 (Connection cable 1 m is bundled)
IM7583-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (swept with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, G, R _s (ESR), Rp, X, G, B, Cs, Cp, L _s , L _p , D (tanδ), Q
Measurable range	100 mΩ to 5 kΩ
Display range	Z: 0.00 m to 9.99999 GΩ / Rx, Rp, X: ±(0.00 m to 9.99999 GΩ) L _s , L _p : ±(0.0000 n to 9.99999 GH) / Q: ±(0.00 to 9999.99) G: ±(0.0000 p to 9.99999 GF) / D: ±(0.0000 to 9.99999 %) / Y: (0.000 n to 9.99999 GS) / B: ±(0.000 n to 9.99999 GS), d%: ±(0.000 % to 999.999 %)
Basic accuracy	Z: ±0.65 %rdg, R: ±0.3%
Measurement frequency	1 MHz to 600 MHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 500 mVrms Current: 0.09 mA to 10.04 mA rms
Output impedance	50 Ω (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	ENAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, DIN-measurement classification, Peak loading/holding, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GPIB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in) W × 200 mm (7.87 in) H × 340 mm (13.78 in) D, 8.0 kg (18.1 lb) Test head: 90 mm (3.54 in) W × 64 mm (2.51 in) H × 24 mm (0.94 in) D, 300 g (10.56 oz)
Included accessories	Test head × 1, Connection cable × 1, Instruction manual × 1, LCR application disc (Communications user manual) × 1, Power cord × 1



Impedance Analyzers/LCR Meters

100kHz to 300MHz Measurement Frequency at High Speeds with Superior Repeatability

IMPEDANCE ANALYZER IM7581



- 100 kHz to 300 MHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- ±0.72% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) IM7581-01 (Connection cable 1 m is bundled)
IM7581-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.



■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, G, R _s (ESR), R _p , X, G, B, C _s , C _p , L _s , L _p , D (tan <delta), q<="" td=""></delta),>
Measurable range	100 mΩ to 5 kΩ
Display range	Z: 0.00 m to 9.99999 GHz / R _s , R _p , X: ± (0.00 m to 9.99999 GHz) L _s , L _p : ± (0.00000 m to 9.99999 GHz) / Q: ± (0.00 to 9999.99) 0: ± (0.00° to 360.00°), C _s , C _p : ± (0.00000 p to 9.99999 GHz) D: ± (0.00000 to 9.99999), Y: (0.000 m to 9.99999 GHz) G, B: ± (0.000 m to 9.99999 GS), Δ%: ± (0.000 % to 999.999 %)
Basic accuracy	Z: ±0.72% rdg, R: ±0.4%
Measurement frequency	100.00 kHz to 300.00 MHz (5 digits resolution)
Measurement signal level	Power: -40.0 dBm to +7.0 dBm Voltage: 4 mV to 1001 mV/mm Current: 0.09 mA to 20.02 mA/mm User-configured power, voltage, and current
Output impedance	50 Ω
Display	8.4-inch color TFT with touch screen
Measurement speeds *	FASTE: 0.5 ms / MED: 0.9 ms / SLOW: 2.1 ms / SLOW2: 3.7 ms * Analog measurement time
Functions	Contact check, Comparator, ESR measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	Handler, USB, LAN, GP-IB (optional), RS-232C (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Max unit: 215 mm (8.46 in) W × 200 mm (7.87 in) H × 268 mm (10.55 in) D, 6.5 kg (28.3 oz) Test head: 41 mm (1.61 in) W × 55 mm (2.17 in) H × 24 mm (0.94 in) D, 175 g (6.1 oz)
Included accessories	Test head >1, Connection cable >1, Power cord >1, Instruction manual >1, LCR application disc (Communications user manual) >1

OPTIONAL ACCESSORIES



TEST FIXTURE
IM9202
Combination use with the
IM9200



SMD TEST FIXTURE
IM9201
Combination use with the
IM9200



TEST FIXTURE STAND
IM9200
Includes magnifying glass



ADAPTER (0.5mm²)
IM9906
11mm (0.43 inch) to Test:
(0.5 in) connector



CALIBRATION KIT
IM9905
Open short/Load set

OPTIONAL ACCESSORIES



GP-IB
INTERFACE
Z3000



GP-IB
CONNECTOR
CABLE 9151-02
2 m (6.56 ft) length



RS-232C
INTERFACE
Z3001



RS-232C CABLE
9637
For the PC, 9 pin - 9 pin,
cm, 1.8 m (6 ft) length

1MHz to 300MHz Measurement Frequency at High Speeds with Superior Repeatability

IMPEDANCE ANALYZER IM7580A



- 1 MHz to 300 MHz testing source frequency
- Fastest test speed of 0.5 msec
- ±0.72% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) IM7580A-1 (Connection cable 1 m is bundled)
IM7580A-2 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.



■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, G, R _s (ESR), R _p , X, G, B, C _s , C _p , L _s , L _p , D (tan <delta), q<="" td=""></delta),>
Measurable range	100 mΩ to 5 kΩ
Display range	Z: 0.00 m to 9.99999 GHz / R _s , R _p , X: ± (0.00 m to 9.99999 GHz) L _s , L _p : ± (0.00000 m to 9.99999 GHz) / Q: ± (0.00 to 9999.99) 0: ± (0.00° to 360.00°), C _s , C _p : ± (0.00000 p to 9.99999 GHz) D: ± (0.00000 to 9.99999), Y: (0.000 m to 9.99999 GHz) G, B: ± (0.000 m to 9.99999 GS), Δ%: ± (0.000 % to 999.999 %)
Basic accuracy	Z: ±0.72% rdg, R: ±0.4%
Measurement frequency	1.0000 MHz to 300.00 MHz (5 digits resolution)
Measurement signal level	Power: -40.0 dBm to +7.0 dBm Voltage: 4 mV to 1001 mV/mm Current: 0.09 mA to 20.02 mA/mm User-configured power, voltage, and current
Output impedance	50 Ω
Display	8.4-inch color TFT with touch screen
Measurement speeds *	FASTE: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, ESR measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Max unit: 215 mm (8.46 in) W × 200 mm (7.87 in) H × 268 mm (10.55 in) D, 6.5 kg (28.3 oz) Test head: 41 mm (1.61 in) W × 55 mm (2.17 in) H × 24 mm (0.94 in) D, 175 g (6.1 oz)
Included accessories	Test head >1, Connection cable >1, Instruction manual >1, LCR application disc (Communications user manual) >1, Power cord >1

OPTIONAL ACCESSORIES



TEST FIXTURE
IM9202
Combination use with the
IM9200



SMD TEST FIXTURE
IM9201
Combination use with the
IM9200



TEST FIXTURE STAND
IM9200
Includes magnifying glass



ADAPTER (0.5mm²)
IM9906
11mm (0.43 inch) to Test:
(0.5 in) connector



CALIBRATION KIT
IM9905
Open short/Load set

OPTIONAL ACCESSORIES



GP-IB
INTERFACE
Z3000



GP-IB
CONNECTOR
CABLE 9151-02
2 m (6.56 ft) length



RS-232C
INTERFACE
Z3001



RS-232C CABLE
9637
For the PC, 9 pin - 9 pin,
cm, 1.8 m (6 ft) length

Impedance Analyzers/LCR Meters

For R & D applications of Electrochemical Components and Materials, Batteries, and EDLCs

CHEMICAL IMPEDANCE ANALYZER IM3590



- Broad 1 mHz to 200 kHz signal source range supports measurements of ion behavior and solution resistance
- Continuous measuring and high-speed testing of LCR and sweep measurements with a single instrument
- Measure internal impedance of batteries with no load
- Perform high-speed sweep measurements in as little as 2 ms
- Basic accuracy of $\pm 0.05\%$ is ideal for applications from component testing to R&D
- Measure LCR impedance for Cole-Cole plots and equivalent circuit analyses of electrochemical components and materials

Model No. (Order Code) IM3590 (For electrochemical components)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C Cable 9637 without hardware flow control.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Continuous measurement mode (LCR mode / Analyzer mode), Analyzer mode (Sweeps with measurement frequency and measurement level, temperature characteristics, equivalent circuit analysis)
Measurement parameters	Z, Y, R, Rx (ESR), Rp, Rdc (DC resistance), X, G, B, C, Cp, Ls, Lp, D (diss.), Q, T, σ (conductivity), ε (dielectric constant)
Measurement range	100 mΩ to 100 MΩ, 10 ranges (All parameters are determined according to Z)
Display range	Z, Y, R, Rp, Rdc, X, G, B, Ls, Lp, C, Cp, σ, ε: ± 0.0000 [unit] to ± 99999 [unit], Absolute value display for Z and Y only 0: ± 0.000 to ± 000.000 , D: ± 0.00000 to ± 999.999 Q: ± 0.00 to ± 9999.9 , A (%): $\pm 0.0000\%$ to $\pm 999.999\%$ T: -20.0°C to 99.9°C 0, ε: ± 0.00000 [unit] to ± 999.999 [unit]
Basic accuracy	Z: $\pm 0.05\%$ rdg. @ $\pm 0.03^{\circ}$
Measurement frequency	1 mHz to 200 kHz (5 digits setting resolution, minimum resolution 1 mHz)
Measurement signal level	Normal mode: V mode/CV mode: 5 mV to 5 Vrms, 1 mV/rms steps CC mode: 10 μA to 50 mA rms, 10 μA rms steps Low impedance high accuracy mode: V mode/CV mode: 5 mV to 2.5 Vrms, 1 mV/rms steps CC mode: 10 μA to 100 mA rms, 10 μA rms steps
Output impedance	Normal mode: 100 Ω, Low impedance high accuracy mode: 25 Ω
Display	5.7-inch color TFT, display can be set to ON/OFF
Measurement time	2 ms (1 kHz), FAINT, display OFF, representative value)
Functions	DC bias measurement, DC resistance temperature compensation (converted reference temperature is displayed), Temperature measurement, Battery measurement (Automatic DC biasing system), Comparator, BIN measurement (classification), Panel loading/unloading, Memory function
Interfaces	EXT I/O (Handler), USB communication (high-speed), USB memory Optional: Choose 1 from RS-232C, GPIB, or LAN
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max.
Dimensions and mass	330 mm (12.99 in) W × 119 mm (4.69 in) H × 163 mm (6.41 in) D, 3.1 kg (6.83 lb)
Included accessories	Power cord → 1, Instruction manual → 1, CD-R (Communication instruction manual and sample software [Communications control, accuracy calculation, and screen capture functionality]) → 1

Shared options for IM3590, IM3533, IM3523

*Please see the individual product catalog for more information

 SMD TEST FIXTURE 94910 Direct connection type, for measuring SMDs, DC to 1 MHz, maximum sample diameter: 0.0044 (inch)	 SMD TEST FIXTURE 95100 Direct connection type, for measuring SMDs with electrodes on the bottom, DC to 8 MHz, maximum sample size: 0.000 to 0.003 (inch), 0.000 to 0.005 (mm)	 4 TERMINAL PROBE 92000 Cable length: 0.219, DC to 8 MHz, impedance characteristic of 30 Ω, 4-terminal pair configuration, maximum conductor diameter: $\phi 1.00$ (in) to 3 mm (0.219)	 PINCHER PROBE 92001 Cable length: 0.748, DC to 1 MHz, impedance characteristic of 30 Ω, 4-terminal pair configuration, regular tip electrode spacing: 0.3 (0.01 in) to 6 mm (0.24 in)	 CONTACT TIPS 93901 To replace the tip on the L2001, regular size, handle-fit with the L2001	 CONTACT TIPS 93902 To replace the tip on the L2001, small size, handle-fit with the L2001	 4 TERMINAL PROBE 914510 Cable length: 1 m (3.28 ft), DC to 8 MHz, impedance characteristic of 30 Ω, 4-terminal pair configuration, maximum conductor diameter: $\phi 1.0$ (in) to 5 mm (0.20 in)	 TEST FIXTURE 9261-10 Cable length: 1 m (3.28 ft), DC to 8 MHz, impedance characteristic of 30 Ω, 4-terminal pair configuration, maximum conductor diameter: $\phi 1.0$ (in) to 1.5 mm (0.06 in)
 TEST FIXTURE 9262 Direct connection type, DC to 8 MHz, maximum conductor diameter: $\phi 1.0$ (in) to 2 mm (0.08 in)	 SMD TEST FIXTURE 9263 Direct connection type, DC to 200 kHz, impedance characteristic of 30 Ω, maximum conductor diameter: 0.000 to 0.005 (inch)	 4 TERMINAL PROBE 9501-10 Cable length: 1 m (3.28 ft), DC to 200 kHz, impedance characteristic of 30 Ω, maximum conductor diameter: 0.000 to 10 mm (0.39 in)	 SMD TEST FIXTURE 9677 Direct connection type, for measuring SMDs with electrodes on the bottom, DC to 120 MHz, maximum sample dimensions: 1.0 mm (0.04 in) to 42 mm (1.65 in) wide, max. 15 mm (0.6 in) high	 SMD TEST FIXTURE 9699 Direct connection type, for measuring SMDs with electrodes on the bottom, DC to 120 MHz, maximum sample dimensions: 1.0 mm (0.04 in) to 42 mm (1.65 in) wide, max. 15 mm (0.6 in) high	 DC BIAS VOLTAGE UNIT 9206-10 Direct connection type, 40 Vdc to 8 MHz, maximum applied voltage of DC 400 V	 DC BIAS CURRENT UNIT 9209-10 Direct connection type, 40 Vdc to 2 MHz, maximum applied current of DC 2 A	
<small>When using the 9264-10 or 926F-10, external constant voltage and constant-current source are required.</small>							



Sheath Type Temperature Probe 9470
Probe tip dia: $\varnothing 3$ mm (0.09 in), Cable length: 1 m (3.28 ft), Weatherproof construction



What's available for IM3523/33:
GPIB INTERFACE 9300 **RS-232C INTERFACE 9201** **LAN INTERFACE 9202**
GP-IB CONNECTOR CABLE 9151/02 2 m (6 ft) length

Impedance Analyzers/LCR Meters

Single Device Solution for High Speed Testing and Frequency Sweeping

IMPEDANCE ANALYZER IM3570



LAN

USB

GPIB

RS-232C

CE

**3rd party
certification**

- LCR measurement, DCR measurement, sweep measurement, continuous measurement and high-speed testing achieved with one instrument
- High-speed testing, achieving maximum speeds of 1.5ms (1 kHz) and 0.5ms (100 kHz) in LCR mode
- High-accuracy measurements, basic accuracy of Z parameter: $\pm 0.00\%$
- Perfect impedance analyzer for testing the resonance characteristics of piezoelectric elements, C-D and low ESR measurement of functional polymer capacitors, DCR and L-Q measurement of inductors (coils and transformers)
- Perform frequency sweeps, level sweeps, and time interval measurements in analyzer mode

Model No. (Order Code) IM3570

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture option appropriate for your application separately.

For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9617 without hardware flow control.


■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, G, B, Cs, Cp, Ls, Lp, D (diss.), Q
Measurement range	100 mΩ to 100 MΩ, 12 ranges (All parameters are determined according to Z)
Display range	Z, Y, G, B, Cs, Cp: $\pm(0.00001 \text{ [mΩ]})$ to 9999999 [mΩ], Absolute value display for Z and Y only G: $\pm 0.000^{\circ}$ to 180.000°, D: $\pm(0.000000$ to 999.9999) Q: ± 0.0000 to 999999.99, Δ%: $\pm(0.0000\%$ to 999.9999%)
Basic accuracy	Z: $\pm 0.05\%$ or rdg. $\pm 0.05\%$
Measurement frequency	4 Hz to 5 MHz (5 digits setting resolution, minimum resolution: 10 mHz)
Measurement signal level	Normal mode: V mode/AC mode: 5 mV to 1 Vrms (up to 1 MHz) 10 mV to 1 Vrms (1.0001 MHz to 5 MHz), 1 mV rms steps CC mode: 10 pA to 50 mA rms (up to 1 MHz) 10 pA to 10 mA rms (1.0001 MHz to 5 MHz), 10 pA rms steps Low impedance high accuracy mode: V mode/AC mode: 5 mV to 1 Vrms (up to 100 kHz), 1 mV rms steps CC mode: 10 pA to 100 mA rms (100 mV and 10 ranges of up to 100 kHz), 10 pA rms steps
Output impedance	Normal mode: 100 Ω, Low impedance high accuracy mode: 10 Ω
Display	5.7-inch color TFT, display can be set to ON/OFF
Measurement time	0.5 ms (100 kHz, FAST, display OFF, representative value)
Functions	DC bias measurement, Comparator, BDN measurement (classification), Panel locking/saving, Memory function
Interfaces	EXT I/O (andler), RS-232C, GPIB, USB communication, USB memory, LAN
Power supply	90 to 264 V AC, 50/60 Hz, 150 VA max.
Dimensions and mass	390 mm (12.99 in) W × 119 mm (4.69 in) H × 307 mm (12.09 in) D, 5.5 kg (12.16 lb)
Included accessories	Power cord <1, Instruction manual <1, CD-R (Communication instruction manual and sample software) <1



Simple Circuit Analysis & Detailed Acceptance/Rejection Decision-Making

EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000

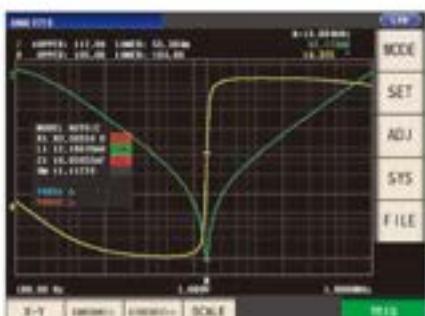


■ Basic specifications

Three-element model	Equivalent circuit model: Four models for Coil, Resistance, Capacitor Measurement items: L1 (Inductance), C1 (Capacitance), R1 (Resistance), Qm (Resonance sharpness), fr (Resonance frequency) / fa (Anti-resonance frequency)
Four-element model	Equivalent circuit model: One model for Piezoelectric element Measurement items: L1 (Inductance), C1 (Capacitance), R1 (Resistance), C0 (Parallel capacitance), Qm (Resonance sharpness or mechanical quality coefficient) fr (Resonance frequency), fa (Anti-resonance frequency), fs (Series resonance frequency), fp (Parallel resonance frequency), fm (Maximum admittance frequency), fn (Minimum admittance frequency), fl (Maximum susceptance frequency), f2 (Minimum susceptance frequency)
Other functions	Simulation: Enables displaying and comparing the ideal frequency characteristics graph derived from the analysis results or the values specified by the user Comparator: Runs a comparator on the analysis results and outputs the decision results to screen, EXT, I/O
X-Y display	Cole-Cole plot, Admittance circle display

■ Equivalent Circuit Model and Measurement Items

Three-element model



Four-element model



- The IM9000 can automatically select the equivalent circuit model from the five typical models to minimize the differences between the measured values and the ideal frequency characteristics derived from the analysis results
- An acceptance/rejection decision can be made for the L, C, and R elements comprising a part and the resonance sharpness (mechanical quality coefficient)
- A detailed decision can be made on the elements using the resonance of a piezoelectric element or inductor

Model No. (Order Code) IM9000

(Factory option Firmware for the IM3570)

Note: The IM9000 is not included in the standard package. To use the IM9000's functions, specify the option upon purchase.
Customers who have purchased the Impedance Analyzer (IM3570) can add the Equivalent Circuit Analysis Firmware (IM9000) function. Please contact your local HI-TEK representative.

LCR Meters

Measurement Frequency from DC, 4 Hz to 8 MHz

LCR METER IM3536



LAN

USB

GP-IB

RS-232C

CE

3 years

- DC, 4 Hz to 8 MHz measurement frequency
- Can be customized up to 10 MHz. Please contact your Hioki distributor or subsidiary for more information.
- High-speed measurement of 1 ms (fastest time)
- High-precision measurement of $\pm 0.05\%$ rdg (representative value)
- Guaranteed accuracy range from 1 mΩ, low-impedance measurement with unmatched repeatability
- DC bias function: Measure under conditions simulating actual use or in accordance with industry standards
- Exceptional specifications and cost-performance for a wide range of applications, from R&D to production lines

Model No. (Order Code) IM3536

IM3536-01 (Special order products up to 10 MHz)

This product is not supplied with measurement probe or test fixtures. Please select and purchase the measurement probe or test fixture appropriate for your application separately. All probes are constructed with a 1.50/0.05 coaxial cable. For an RS-232C connection, A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9007 without hardware flow control.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR (Measurement with single condition), Continuous testing (Continuous measurement under varied conditions)
Measurement parameters	Z, Y, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D (diode), v, e
Measurement range	100 mΩ to 100 MΩ, 10 ranges (All parameters are determined according to Z)
Display range	Z: 0.00 m to 9.99999 GΩ, Y: 0.0000 to 9.99999 GS, Rdc: ± (0.00 m to 9.99999 GΩ), D: ± (0.00000 to 9.99999), Δ%: ± (0.00 % to 999.99 %), or other
Basic accuracy	Z: 0.05% rdg, ± 0.03% (representative value, Measurable range: 1 mΩ to 200 MΩ)
Measurement frequency	4 Hz to 8 MHz (5 digits setting resolution, minimum resolution: 10 mHz)
	[Normal mode: V mode/CCV mode] 4 Hz to 1.0000 MHz: 10 mV to 1 Vrms (maximum 50 mArms) 1.0001 MHz to 8 MHz: 10 mV to 1 Vrms (maximum 100 mAms)
	[Low-impedance high accuracy mode: V mode/CCV mode] 4 Hz to 1.0000 MHz: 10 mV to 1 Vrms (maximum 100 mAms)
Measurement signal level	[Normal mode: CC mode] 4 Hz to 1.0000 MHz: 10 μA to 50 mAms (maximum 5 Vrms) 1.0001 MHz to 8 MHz: 10 μA to 50 mAms (maximum 1 Vrms)
	[Low-impedance high accuracy mode: CC mode] 4 Hz to 1.0000 MHz: 10 μA to 100 mAms (maximum 1 Vrms)
	[DC resistance measurement] Measurement signal level: Fixed at 1 V
DC bias measurement	Generating range: DC voltage 0 V to 2.50 V (10 mV resolution) In low Z high accuracy mode: 0 V to 1 V (10 mV resolution)
Output impedance	Normal mode: 100 Ω, Low impedance high accuracy mode: 10 Ω
Display	5.7-inch color TFT with touch panel
Functions	Comparator, B/N measurement (10 categories for 2 measurement parameters), Trigger function, Open-short compensation, Contact check, Panel loading/unloading, Memory function
Interfaces	EXT. I/O (HANDLER), JIGS, USB flash drive, LAN, GP-IB, RS-232C, ECD
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max.
Dimensions and mass	230 mm (9.14 in) W × 119 mm (4.69 in) H × 250 mm (9.84 in) D, 4.2 kg (9.21 lb)
Included accessories	Power cord × 1, Instruction manual × 1, LCR application disc (Communication user manual) × 1



Ideal for Production Lines of Electronic Parts and Automated Testing

LCR METER IM3523



USB

LAN

option (IM3523)

GP-IB

option (IM3523)

RS-232C

option (IM3523)

CE

3 years

- ± 0.05% accuracy with wide measurement range (DC, 40Hz to 200kHz, 5mV to 5V, 10μA to 50mA)
- Non-stop testing over mixed measurement conditions such as C-D(120 Hz) and ESR (100 kHz) at 10 times the speed of previous models (compared with Model 3532-50)
- Built-in comparator and B/N functions
- Rapid 2 msec test time

Model No. (Order Code) IM3523

IM3523-A

This product is not supplied with measurement probe or test fixtures. Please select and purchase the measurement probe or test fixture appropriate for your application separately. All probes are constructed with a 1.50/0.05 coaxial cable. For an RS-232C connection, A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9007 without hardware flow control.

■ Basic specifications (Accuracy guaranteed for 1 year)

	IM3523	IM3523-A
Measurement modes	LCR (Measurement with single condition), Continuous testing (Continuous measurement under varied conditions)	
Measurement parameters	Z, Y, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D (diode), v, e	
Measurement range	100 mΩ to 100 MΩ, 10 ranges (All parameters are determined according to Z)	
Displayable range	Z: 0.00 m to 9.99999 GΩ, Y: 0.0000 to 9.99999 GS, Rdc: ± (0.00 m to 9.99999 GΩ), D: ± (0.00000 to 9.99999), Δ%: ± (0.00 % to 999.99 %), or other	
Basic accuracy	Z: ± 0.05% rdg, ± 0.03% (representative value, Measurable range: 1 mΩ to 200 MΩ)	
Measurement frequency	40 Hz to 200 kHz (5 digits setting resolution)	
Measurement signal level	V mode, CC mode: 5 mV to 5 Vrms, 1 mA rms steps CC mode: 10 μA to 50 mAms, 10 μA rms steps	
Output impedance	100 Ω	
Display	Monochrome LCD	
Measurement time	2 ms (1 kHz, B/N, representative value)	
Functions	Comparator, B/N measurement (classify function), Panel loading/unloading, Memory function	
Interfaces	EXT. I/O (handler), USB communication (high-speed) Optical slave 1 from RS-232C, GPIB, or LAN	EXT. I/O (handler), USB communication (high-speed), LAN (100BASE-T)
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max	
Dimensions	260 mm (10.24 in) W × 88 mm (3.46 in) H × 203 mm (7.99 in) D	
Mass	2.4 kg (5.31 oz)	2.1 kg (4.1 oz)
Included accessories	Power cord × 1, Instruction manual × 1, CD-R (Includes PC commands and sample software × 1)	Power cord × 1, CD-R (Includes instruction manual, PC commands and sample software × 1)

IM3590, IM3533, IM3523, shared options

Please see shared options for model IM3590

LCR Meters

From R&D Applications to Windings, Coil and Transformer Manufacturing

LCR METER IM3533



USB

LAN

GP-IB

RS-232C

CE

**3 years
Warranty**

- ±0.05% accuracy with wide measurement range (DC, 1mHz to 200kHz, 5mV to 5V, 10uA to 50mA)
- Non-stop testing over mixed measurement conditions such as C-D and ESR at 10 times the speed of previous models
- Built-in low impedance high precision mode effective for testing low inductance or the ESR of aluminum electrolysis capacitance
- Dedicated modes for measuring transformer winding ratio, mutual inductance and temperature compensated DCR
- Frequency sweep testing (IM3533-01 only)
- 2m/4m cable setting in addition to the standard 0m/1m
- Touch screen with intuitive operation

Model No. (Order Code) **IM3533**

IM3533-01 (Advanced function model)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 3.5D-IV coaxial cable.

For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9107 without hardware flow control.

IM3590, IM3533, IM3523 shared options

Please see shared options for model IM3590

■ Basic specifications (Accuracy guaranteed for 1 year)

	IM3533	IM3533-01
Measurement modes	LCR (Measurement with single condition), Transformer testing (N, M, AL), Continuous testing(Continuous measurement under varied conditions) (LCR mode)	LCR (Measurement with single condition), Transformer testing (N, M, AL), Analyzer (wave testing), Continuous Testing (LCR/Analyzer mode)
Measurement parameters	Z, Y, G, X, G, B, Q, Rdc (DC resistance), Ra (ESR), Rp, Ls, Lp, Cs, Cp, D (ind), N, M, AL, T	Z, Y, Rx, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : ± 0.00000 [unit] to 9.99999G [unit]; Real value display for Z and Y only 0 : ± 0.000° to 360.000°, D : ± 0.00000 to 9.99999, Q : ± 0.00000% to 999.999%, T : -40.0°C to 99.9°C
Measurement range	100 mΩ to 100 MΩ, 10 ranges (All parameters defined in terms of Z)	Z, Y, Rx, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : ± 0.00000 [unit] to 9.99999G [unit]
Displayable range	Z, Y, Rx, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : ± 0.00000 [unit] to 9.99999G [unit]; Real value display for Z and Y only 0 : ± 0.000° to 360.000°, D : ± 0.00000 to 9.99999, Q : ± 0.00000% to 999.999%, T : -40.0°C to 99.9°C	0 : ± 0.000° to 360.000°, D : ± 0.00000 to 9.99999, Q : ± 0.00000% to 999.999%, T : -40.0°C to 99.9°C
Basic accuracy	Z: ± 0.05% rdg, 0: ± 0.03°	Z: ± 0.05% rdg, 0: ± 0.03°
Measurement frequency	1 mHz to 200 kHz (5 digits setting resolution, minimum resolution 1 mHz)	[Normal mode] V mode, CV mode: 5 mV to 5 Vrms, 1 mV/rms steps CC mode: 10 μA to 50 mA rms, 10 μA rms steps [Low impedance high accuracy mode] V mode, CV mode: 5 mV to 2.5 Vrms, 1 mV/rms steps CC mode: 10 μA to 100 mA rms, 10 μA rms steps
Measurement signal level	Normal mode: 100 Ω, Low impedance high accuracy mode: 25 Ω	
Output impedance	Normal mode: 100 Ω, Low impedance high accuracy mode: 25 Ω	
Display	5.7-inch touch-screen color TFT display can be set to ON/OFF	
Measurement time	2 ms (1 kHz), FAST, display OFF, representative value)	
Functions	DC bias measurement, DC resistance temperature compensation (converted reference temperature display), Comparator, BIN measurement (classify function), Panel loading/saving, Memory function	
Interfaces	EXT I/O (andler), USB communication (high-speed), USB memory Optional: Choose 1 from RS-232C, GP-IB, or LAN	
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max	
Dimensions and mass	300 mm (12.99 in) W × 119 mm (4.69 in) H × 168 mm (6.61 in) D, 3.1 kg (6.83 oz)	
Included accessories	Power cord >1, Instruction manual >1, CD-R (includes PC commands and sample software) >1	

High-speed 1MHz C Tester Delivering Super Precise Measurements Even from Low Capacitance Levels

C METER 3506-10



GP-IB

RS-232C

CE

**3 years
Warranty**

- High-speed analog test time of 0.6 ms (at 1 MHz)
- Improved noise resistance and enhanced repeatability in measurement precision even for production lines
- 1 kHz and 1 MHz measurement frequency supports stable low capacitance testing with taping machines
- BIN function, for easy component screening

Model No. (Order Code) **3506-10**

(Measurement frequency: 1 kHz and 1 MHz)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately.
For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C cable 9107 without hardware flow control.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	C (Capacitance), D (loss coefficient, tan δ), Q (Ltan δ)
Measurement range	C: 0.001 pF to 15.0000 pF, D: 0.00001 to 1.99999, Q: 0.0 to 1999.9
Basic accuracy	(Typ.) C: ±0.14 %rdg, D: ±0.0013
Measurement frequency	1 kHz, 1 MHz
Measurement signal level	500 mV, 1 V rms
Output impedance	1 Ω (at 1 kHz in 2.2 pF and higher range), 20 Ω (in ranges other than the above)
Display	LED (six digits, full scale count depends on measurement configuration setting)
Measurement time	1.5 ms (1 MHz), 2.0 ms (1 kHz) (Typ. value. Depends on measurement configuration setting)
Functions	BIN (measurement values can be classified by rank), Trigger-synchronous output, Setting configuration can be stored, Comparator, Averaging, Low-Creject (bad contact detection), Chatter detection, Current detection circuit monitoring, Applied voltage value monitoring, EXT. I/O, RS-232C, GP-IB
Power supply	Selectable from 100, 120, 220 or 240 V AC ±10 %, 50/60 Hz, 40 VA max.
Dimensions and mass	260 mm (10.24 in) W × 100 mm (3.94 in) H × 260 mm (10.24 in) D, 4.8 kg (10.63 oz)
Included accessories	Power cord >1, Instruction manual >1, Spare fuse >1



SMD TEST FIXTURE IM810 Direct connection type, for measuring SMDs with electrodes on the bottom, DC to 1 MHz, measurable conductor diameter: 0.010 (0.039) mm to 0.400 (0.0157) in	SMD TEST FIXTURE IM810 Direct connection type, for measuring SMDs with electrodes on the bottom, DC to 1 MHz, measurable conductor diameter: 0.010 (0.039) mm to 0.400 (0.0157) in	4-TERM PROBE L200 Cable length: 1 m (3.28 ft), DC to 1 MHz, impedance characteristics of 50 Ω, 4-terminal per configuration, spacing: 0.3 (0.0118) in to 5 mm (0.197 in)	PINCHER PROBE L200 Cable length: 27 cm (0.40 ft), DC to 1 MHz, impedance characteristics of 50 Ω, 4-terminal per configuration, spacing: 0.3 (0.0118) in to 5 mm (0.197 in)	CONTACT TIPS IM901 To replace the tip on the L200, replaceable, handled with the L200	CONTACT TIPS IM902 To replace the tip on the L200, replaceable, handled with the L200	4-TERMINAL PROBE 9140-10 Cable length: 1 m (3.28 ft), DC to 1 MHz, impedance characteristics of 50 Ω, 4-terminal per configuration, measurable conductor diameter: 0.1 (0.01) in to 1.3 mm (0.04 in)	TEST FIXTURE 9261-10 Cable length: 1 m (3.28 ft), DC to 1 MHz, impedance characteristics of 50 Ω, 4-terminal per configuration, measurable conductor diameter: 0.1 (0.01) in to 2 mm (0.08 in)
TEST FIXTURE 9261-10 Direct connection type, DC to 1 MHz, measurable conductor diameter: 0.1 (0.01) in to 2 mm (0.08 in)	SMD TEST FIXTURE 9267 Direct connection type, for measuring SMDs with electrodes on the side, DC to 1 MHz, measurable conductor diameter: 0.1 (0.01) in to 40 mm (1.575 in)	4-TERMINAL PROBE 9261-10 Cable length: 1 m (3.28 ft), DC to 200 kHz, impedance characteristics of 50 Ω, 4-terminal per configuration, measurable conductor diameter: 0.1 (0.01) in to 1.3 mm (0.04 in)	TEST FIXTURE 9261-10 Direct connection type, for measuring SMDs with electrodes on the side, DC to 1 MHz, measurable conductor diameter: 0.1 (0.01) in to 40 mm (1.575 in)				

LCR Meters

High-speed, Large-capacitance MLCC Inspection with Constant Voltage

C HiTESTER 3504



GP-IB

RS-232C

CE

Warrantee

- High speed measurement of 2ms
- Supports C measurements with voltage dependency characteristics through the use of constant voltage testing (CV)
- Model 3504-60 can detect contact failure on all 4 terminals for increased reliability
- BIN function on the 3504-60-50 is ideal for sorting machines
- Model 3504-40 offers high speed and affordability, perfect for integrating into taping machines
- In all models, contact error is constantly monitored during measurement, contributing to increased yield

Model No (Order Code)	3504-40	(Built-in RS-232C interface)
	3504-50	(Built-in GP-IB, RS-232C)
	3504-60	(Built-in GP-IB, RS-232C)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. For an RS-232C connection, a crossover cable for interconnection can be used. You can use the RS-232C CABLE P407.

■ Basic specifications (Accuracy guaranteed for 6 months)

Measurement parameters	C (capacitance), D (loss coefficient tan δ)
Measurement range	C: 0.9400 pF to 20.0000 mF, D: 0.00001 to 199999
Basic accuracy	(Typ) C: ±0.09% rdg ±10 dgt, D: ±0.0016
Measurement frequency	120 Hz, 1 kHz
	300 mV (3504-60 only), 500 mV, 1 V rms
Measurement signal level	CV 100 mV Measurement range: up to 70 μF range (Source frequency 1 kHz), up to 1.45 mF range (Source frequency 120 Hz)
	CV 500 mV Measurement range: up to 150 μF range (Source frequency 1 kHz), up to 1.45 mF range (Source frequency 120 Hz)
	CV 1 V Measurement range: up to 70 μF range (Source frequency 1 kHz), up to 200 μF range (Source frequency 120 Hz)
Output impedance	5Ω (in open terminal voltage mode outside of the CV measurement range)
Display	LED (six digits, full scale count dependent on measurement range)
Measurement time	2 ms (Typ. value. Dependent on measurement configuration settings)
Functions	4-terminal contact check function (3504-60 only) BIN (measurement values can be classified by rank) (3504-50, 3504-60). Trigger-synchronous output. Setting configurations can be stored. Comparator, Averaging, Low-C reject (bad contact detection), Chatter detection, EXT. I/O, RS-232C GP-IB (3504-50, 3504-60)
Power supply	Selectable from 100, 120, 220 or 240 V AC ±10%, 50/60 Hz, 100 VA max.
Dimensions and mass	260 mm (10.24 in)W × 100 mm (3.94 in)H × 220 mm (8.66 in)D, 3.8 kg (8.4 lb)
Included accessories	Power cord ×1, Instruction manual ×1, Spare fuses ×1



High-precision Portable Resistance Meter Measures from $\mu\Omega$ to $M\Omega$

RESISTANCE METER RM3548



USB

CE

Warrantee

- 0.02 % basic accuracy, 0.1 $\mu\Omega$ max. resolution, 1A max. testing current
- Measure from 0.0 $\mu\Omega$ (testing current 1 A) to 3.5 $M\Omega$
- Easily record up to 1,000 data points in memory simply by applying the instrument's probes
- Smoothly capture temperature-rise test data using interval measurement
- Portable design is ideal for maintenance and testing of large equipment

Model No (Order Code)	RM3548
-----------------------	--------

■ Basic specifications (Accuracy guaranteed for 1 year)




Resistance range	0.3 $\mu\Omega$ (3.5000 $\mu\Omega$ display max., 0.1 $\mu\Omega$ resolution) to 3 $M\Omega$ range (3.5000 $M\Omega$ display max., 100 Ω resolution), 10 steps
Measurement accuracy	±0.020 % rdg ±0.007 % E.s.
Testing current	[at 3 $\mu\Omega$ range] 1 A DC to [at 3 $M\Omega$ range] 500 nA DC
Open-terminal voltage	5.5 V DC max.
Temperature measurement	-30.0°C to 99.9°C, accuracy: ±0.5°C (Temperature Sensor Z3002 and RM3548 combined accuracy)
Measurement speed	Fixed
Display refresh rate	Without OVC: approx. 100ms, With OVC: approx. 230ms
Functions	Temperature correction, temperature conversion, offset voltage compensation (OVC), comparator (ABSTEPS), length conversion, judgment sound setting, auto hold, auto power save (APS).
Memory storage	Number of recordable data points (manual/auto) Up to 1,000, (interval) Up to 6,000; Interval: 0.2 s to 10.0 s (0.2 s step); Acquisition of data from memory, display, USB mass storage (CSV, TXT files)
Power supply	LR6 (AA) Alkaline batteries -8, Continuous use: 10 hours (Under our company's conditions). Rated power consumption: 5 VA max.
Dimensions and mass	192 mm (7.56 in) W × 121 mm (4.76 in) H × 55 mm (2.17 in) D, 770 g (27.2 oz)
Included accessories	Clip-type lead L2107 ×1, Temperature sensor Z3002 ×1, LR6 Alkaline battery ×8, Instruction manual ×1, USB Cable A-to-mini B type ×1, Bag ×1, Spare fuses ×1



For LCR Meters and Impedance Analyzers Probes & Test Fixtures and Applicable SMD size

Please use the probes specified below. For probe characteristic impedance of 50 Ω, a 50 Ω coaxial cable is used. For probe characteristic impedance of 75 Ω, a 75 Ω coaxial cable is used.


Probes and Test Fixtures for Lead Components

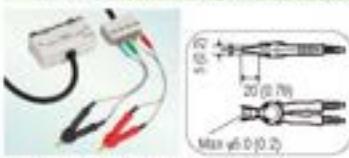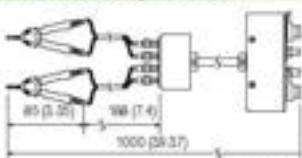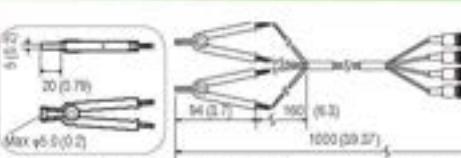			
FOUR-TERMINAL PROBE L2000 Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in) to 5 mm (0.20 in)		4-TERMINAL PROBE 9140-10 Cable length 1 m (3.28 ft), DC to 100 kHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in) to 5 mm (0.20 in)	4-TERMINAL PROBE 9140 Cable length 1 m (3.28 ft), DC to 100 kHz, impedance characteristics of 75 Ω, 4-terminal configuration, measurable conductor diameter: φ0.3 (0.01 in) to 5 mm (0.20 in)
			
TEST FIXTURE 9261-10 Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in) to 5 mm (0.20 in)	TEST FIXTURE 9261 Impedance characteristics of 75 Ω, 4-terminal configuration. Other specifications are the same as for the 9261-10	TEST FIXTURE 9262 Direct connection type, DC to 8 MHz, measurable conductor diameter: φ0.3 (0.01 in) to 2 mm (0.08 in)	

Test Fixtures for SMDs

Applicable SMD size ✓ : Measurable
 ▲ : Not recommended

SMD type	Length: L	Width: W	M9202	M9201	M9110	M9100	L2001 with IP-90001	L2001 with IP-90002	9699	9677	9203
0201 008004	0.25 mm (0.01 in)	0.125 mm (0.005 in)			✓						
0402 01005	0.40 mm (0.02 in)	0.20 mm (0.01 in)				✓					
0603 0201	0.60 mm (0.02 in)	0.30 mm (0.01 in)		✓		✓		✓		▲	
1005 0402	1.00 mm (0.04 in)	0.50 mm (0.02 in)	✓		✓	✓	✓	✓	✓		
1608 0803	1.60 mm (0.06 in)	0.80 mm (0.03 in)	✓	✓			✓	✓	✓	✓	▲
2012 0805	2.00 mm (0.08 in)	1.25 mm (0.05 in)	✓	✓			✓	✓	✓	▲	✓
3216 1206	3.20 mm (0.13 in)	1.60 mm (0.06 in)	✓	✓			✓	✓	✓		
3225 1210	3.20 mm (0.13 in)	2.50 mm (0.10 in)	✓	✓			✓	✓	✓		
4532 1812	4.50 mm (0.18 in)	3.20 mm (0.13 in)	✓				✓	✓			
5750 2220	5.70 mm (0.23 in)	5.00 mm (0.20 in)	✓				✓	✓			

				
TEST FIXTURE IM9202 Use in combination with the IM9200	SMD TEST FIXTURE IM9201 Use in combination with the IM9200	ADAPTER/3.5mm/7mm IM9906 3.5 mm (0.14 in) male to 7 mm (0.28 in) conversion	CALIBRATION KIT IM9505 Open/Short/Load set	Probe contact Advanced contact technology delivers highly repeatable measurement results Measurement probe diameter: 0.127 mm Solder splices 0.127 mm Stage of probe tip: 10° cone
				
SMD TEST FIXTURE IM900 Direct connection type, SMDs with electrodes on the bottom, DC to 8 MHz, measurable (φ): 0402 (0.02), 0603 (0.03), 1005 (0.05), 1608 (0.06), 2012 (0.08), 3216 (0.13), 3225 (0.13), 4532 (0.18), 5750 (0.23)	SMD POSITIONING MECHANISM Test probes can be positioned easily and reliably using template and guide grooves for various SMD sizes.	HIGH-PRECISION FOUR-TERMINAL MEASUREMENT The fixtures are stable, high-precision four-terminal measurements to reliably apply four probes to the SMD's small electrodes.	SMD TEST FIXTURE 9699 Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 120 MHz, test sample dimensions: 10 mm (0.4 in) to 40 mm (1.6 in) wide, max. 15 mm (0.6 in) high	SMD TEST FIXTURE 9677 Direct connection type, For measuring SMDs with electrodes on the side, DC to 120 MHz, test sample dimension: 3.5 mm (0.14 in) to 40 mm (1.6 in) wide, max. 15 mm (0.6 in) high
				
SMD TEST FIXTURE 9263 Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in) to 10 mm (0.39 in)	Enlarged view Max. 10 (0.39) Unit: mm (in)	PINCHER PROBE L2001 Cable length 73 cm (2.40 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in) to 6 mm (0.24 in)	CONTACT TIPS IM9901 To replace the tip on the L2001, regular size, handled with the L2001	CONTACT TIPS IM9902 To replace the tip on the L2001, small size

Resistance Meters

Market leading precision tests for testing every weld or connection on your production line

RESISTANCE METER RM3545A



LAN

RS-232C

USB

CE

CUL

3-year
Warranty

- Equipped with advanced features, ensuring precise resistance measurement (OVC, temperature measurement, and correction function)
- 0.045% basic accuracy, 1 mΩ max. resolution, 1 A max. testing current
- Measure from 1 mΩ (testing current 1 A) to 1200 MΩ
- The RM3545A-2 can be equipped with up to two optional Z3003 Multiplexer Units, allowing it to measure up to 20 channels (using the 4-terminal method)
- High path resistance tolerance allows seamless integration into an automatic test system, eliminating concerns about wiring or contact resistance

Model No. (Chair Color): RM3545A-1 (Single-channel model)

RM3545A-2 (Support for the multiplexer unit)

Measurement Leads / Tips / Sensors

PIN TYPE LEAD L2100 A: 300 mm (11.8 in), B: 72 mm (8.7 in), L: 1.4 m (4.9 ft), 1000 VDC	TIP PIN 9772-90 To replace the tip on the Pin type lead 9772, L2100, 2103, (one piece)	TIP PIN 9771-90 Replacement tip for pin type lead 9771, L2100, 2103 (one piece)	PIN TYPE LEAD L2103 A: 25 mm (0.94 in), B: 78 mm (3.07 in), L: 1.5 m (4.92 ft), 60 VDC
CLIP TYPE LEAD L2101 A: 250 mm (9.84 in), B: 64 mm (0.3 in), L: 1.5 m (4.92 ft), 60 VDC	4-TERMINAL LEAD L2104 A: 200 mm (11.02 in), B: 40 mm (5.07 in), L: 1.5 m (4.92 ft), 60 VDC	TIP PIN 9770-90 PIN TYPE LEAD L2102 Replacement tip for pin type lead 9770, L2102 (one piece)	About lead length A: First junction to probe B: Probe length L: Overall length Note: If L110 to L114 length "A" can be extended by roughly 1.2 m (3.9 ft) by cutting the leading edge.
MULTIPLEXER UNIT Z3003 4-wire 10-bit or 2-wire 2-bit input switching	TEMPERATURE SENSOR Z2001 1.75 m (5.75 ft) length	LED COMPARE ATTACHMENT L2105 2 m (6.56 ft) length	RS-232C CABLE L9637 For external control, double-shielding, 9-pin D-sub, 3 m (9.84 ft) length
USB CABLE (A-B) L1002 1 m (3.28 ft) length	LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross connection adapter, 2 m (6.56 ft) length		

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance range (13 ranges)	Range, max. display value, resolutions, testing current (measurement current)
	1000 $\mu\Omega$: 1200.000 $\mu\Omega$, 1 mΩ, 1 A
	10 mΩ: 12.000.000 mΩ, 10 mΩ, 1 A
	100 mΩ: 120.000 mΩ, 100 mΩ, 1 A
	1000 mΩ: 1200.000 mΩ, 1 $\mu\Omega$, 100 mA
	10 Ω : 12.000.000 Ω , 10 $\mu\Omega$, 10 mA
	100 Ω : 120.000 Ω , 100 $\mu\Omega$, 10 mA
	1000 Ω : 1200.000 Ω , 1 mΩ, 1 mA
	10 kΩ: 12.000.000 kΩ, 10 mΩ, 1 mA
	100 kΩ: 120.000 kΩ, 100 mΩ, 100 $\mu\A$
	1000 kΩ: 1200.000 kΩ, 1 Ω , 10 $\mu\A$
	10 MΩ: 12.000.000 MΩ, 10 Ω , 1 $\mu\A$
	100 MΩ (10 MΩ range high-precision mode): 120.000 MΩ, 100 Ω , 100 nA
	1000 MΩ: 1200.0 MΩ, 100 kΩ, 1 $\mu\A$ or less
Representative accuracy (high mode, OVC function enabled, SL0/W2, no zero adjustment)	1000 $\mu\Omega$ range: $\pm 0.045\%$ rdg $\pm 0.001\%$ f.s. 10 mΩ range: $\pm 0.045\%$ rdg $\pm 0.001\%$ f.s. 100 mΩ range: $\pm 0.045\%$ rdg $\pm 0.001\%$ f.s. 1000 mΩ range: $\pm 0.012\%$ rdg $\pm 0.001\%$ f.s. 100 Ω range: $\pm 0.006\%$ rdg $\pm 0.001\%$ f.s.
Testing current (Measurement current)	High mode: 1000 $\mu\Omega$ (1 A) to 1000 MΩ (up to 1 $\mu\A$) Low mode: 100 mΩ (900 mA) to 100 Ω (1 mA) Low power mode (LP): Low power measurement with measurement current and open circuit voltage down to 20 mV LP1000 mΩ (1 mA) to LP1000 Ω (5 $\mu\A$)
Measurement speed	Representative value: FAST (2.3 ms) / MED (50 Hz, 22 ms, 60 Hz, 39 ms) / SL0/W1 (102 ms) / SL0/W2 (202 ms) Pure resistance: 10 mΩ range: FAST (21 ms) / MED (50 Hz, 41 ms, 60 Hz, 37 ms) / SL0/W1 (121 ms) / SL0/W2 (221 ms)
Path resistance tolerance (reference values)	Range: 100 mΩ or less (Pure Resistance mode off): 2.6 Ω Range: 100 mΩ or less (Pure Resistance mode on): 3.5 Ω
Path resistance between SOURCE B and SOURCE A (other than measurement target)	Range: 1000 Ω or less: 15 Ω Range: 10 Ω - 100 Ω Range: 10 kΩ - 100 kΩ Range: 100 kΩ or greater: 1 kΩ
Maximum open-terminal voltage	Range: 1000 Ω or less: 8.0 V Range: 10 kΩ or greater: 20 V
Temperature measurement	Temperature Sensor (Z2001 [included accessories]): -10.0 °C to 99.9 °C Analog input (Ex: Infrared thermometer): 0 V to 2.0 V DC
Multiplexer (built-in option)* *RM3545A-2 only	Multiplexer unit Z3003 Number of installable units: Max. 2 Max. number of channels: 20 channels (4-wire method), 42 channels (2-wire method) Switching time: 30 ms
Multiplexer (external option)	Switch Mainframe Maximum number of channels (SW1000): 33 channels (4-wire method) Maximum number of channels (SW1002): 132 channels (4-wire method) Switching time: 31 ms
Communication interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX), RS-232C (Max. 115200 bps, also used as printer interface), USB, EXT I/O (D-sub 37-pin, Analog output (D/A output voltage range: 0 V to 1.5 V DC)
Functions	Contact check, Zero adjustment (within each range $\pm 50\%$ f.s.) ¹ , Zero-adjustment-free accuracy guaranteed, OVC function, Contact improvement function (max. applied voltage: 5V; max. applied current: 10 mA), Low-power mode (maximum open voltage: 20 mV), Auto-hold function, Comparator, Temperature measurement function, Temperature correction (TC) function, Temperature conversion (AT) function, Statistical calculation function, Delay function, Averaging function, Saving panels (saving of measurement conditions), Data memory function, Command monitor function (display of send/receive status of commands and queries), LabVIEW® Driver compatible ² 1: Zero adjustment forcibly disabled for 100 MΩ or greater 2: LabVIEW® Driver is the trademark or registered trademark of National Instruments.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 40 VA max.
Normal power consumption (reference value)	16 W (testing current 1 A, LCD on)
Dimensions	235 mm (8.46 in) W × 80 mm (3.15 in) H × 306.5 mm (12.07 in) D,
Mass	RM3545A-1: 2.7 kg (5.95 lb), RM3545A-2: 3.4 kg (7.49 lb)
Included accessories	Power cord × 1, Temperature sensor Z2001 × 1, Male EXT I/O connector × 1, EXT I/O connector cover × 1, Spare fuse (F1.6AH 250 V) × 1, Start up guide × 1, Operating Instructions × 1, Instruction manual × 1

Resistance Meters

Featuring Super-high Accuracy and Multi-channel Capabilities (20 channels with 4-terminal measurement)

RESISTANCE METER RM3545



GP-IB

RM3545-01

RS-232C

RM3545-02

USB

RM3545-03

CE

RoHS

UL

IEC

EN61010-1

- 0.006% basic accuracy, 10 nΩ max. resolution, 1A max. testing current
- Measure from 0.00 μΩ (testing current 1 A) to 1000 MΩ
- Multiplexer Unit Z3003 (option) provides 20-channels of 4-terminal measurements for a complete assessment of multi-point signals (RM3545-02 only)
- Low-power resistance measurement with an open voltage not exceeding 20 mV
- High-speed, comprehensive productivity support delivers decisions in as little as 2.0 ms from start to finish

Model No. (Order Code) RM3545

RM3545-01 (Built-in GP-IB interface)

RM3545-02 (Support for the multiplexer unit)

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	10 mΩ (12.0000 mΩ display max., 10 nΩ resolution) to 1000 MΩ range (1200.00 MΩ display max., 100 kΩ resolution), 12 steps [LP ON] 10.00 mΩ (1200.00 mΩ display max., 10 nΩ resolution) to 1000 Ω range (1200.00 Ω display max., 10 mΩ resolution), 4 steps Measurement accuracy: ±0.006 % rdg ±0.001 % f.s.
Testing current	1 A DC to 100 nA DC [LP ON] 1 mA to 5 μA DC
Open-terminal voltage	20 V DC max. (10 kΩ range or more), 3.5 V DC max. (100 kΩ range or less) [LP ON] 20 mV DC max.
Temperature measurement	-80.0°C to 99.9 °C, accuracy: ±0.5 °C (Temperature Sensor Z2001 and RM3545 combined accuracy), -99.9°C to 999.9°C (analog input)
Measurement speed	FAST (2.0ms) / MED (50Hz 22ms, 60Hz 18ms) / SLOW1 (30ms) / SLOW2 (120ms) * Measurement speed is different at each range, 2.0ms is the fastest value
Functions	Temperature correction, temperature conversion, offset voltage compensation (OVC), comparator (A/D, REP%, BDN, key-lock (OFF, menu lock, all lock), display digit count selection function (7-digit/6-digit/5-digit), automatic power supply frequency settings (AUTOF 50Hz/60Hz), scaling, judgment sound setting, auto hold, averaging, statistical calculations, panel store(panel load, D/A output)
Multiplexer	[Only RM3545-02] Support unit Z3003 (Install up to 2 units)
Communication interfaces	Select from GP-IB (RM3545-01 only), RS-232C, PRINTER (RS-423C), or USB. Remote function, communications monitor function, data output function, memory (50)
Power supply	100 V to 240 V AC, 50 Hz/60 Hz. Rated power consumption: 40 VA max.
Dimensions and mass	215 mm (8.46 in) W × 80 mm (3.15 in) H × 306.5 mm (12.07 in) D [RM3545/RM3545-01] 2.5 kg (5.52 lb). [RM3545-02] 3.2 kg (7.05 lb)
Included accessories	Power cord x1, Clip type lead L2100 x1, Temperature sensor Z2001 x1, Male D-sub 10 connector x1, Instruction manual x1, Application disc x1, USB cable (A-to-B type) x1, Spare fuse x1

* The Z3003 20-channel unit is sold separately (RM3545-02 only).



Resistance Meters

Long-Selling Model for Low Resistance Measurement

RESISTANCE METER RM3544




- 0.02% basic accuracy, 1 $\mu\Omega$ max. resolution, 300 mA max. measurable current
- Measure from 0.000 m Ω (testing current 300 mA) to 3.5 M Ω
- Probe for guard jack use and increased measurement current yield an instrument that's more resistant to noise
- Optional LED COMPARATOR ATTACHMENT and high-volume judgment tones combine to ensure PASS/FAIL judgments are communicated reliably in the noisy environment of the production floor
- EXT I/O interface with NPN/PNP support can accommodate a variety of automated production lines (-01 model)

Model No. (Order Code) RM3544 (No interface)
RM3544-01 (Built-in EXT I/O, RS-232C, USB)

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	30 m Ω (35.000 m Ω display max., 1 $\mu\Omega$ resolution) to 3 M Ω range (3.500 M Ω display max., 100 Ω resolution), 9 steps
Testing current	[at 30 m Ω range] 300 mA DC to [at 3 M Ω range] 300 nA DC
Open-terminal voltage	5.5 V DC max.
Temperature measurement	-10.0 °C to 99.9 °C, accuracy: ±0.5 °C (Temperature Sensor Z2001 and RM3544 combined accuracy)
Measurement speed	FAST (0.9Hz: 21ms, 60Hz: 18ms) / MED (10ms) / SLOW (40ms)
Display refresh rate	N/A
Functions	Temperature correction, comparator (ABS/REP/0), key-lock (OFF, menu lock, all lock), display digit count selection function (3 digits/4 digits), automatic power supply frequency settings (AUT/0.9Hz/60Hz), scaling, judgment sound setting, auto hold, averaging, panel store/panel load
Memory storage	N/A
Communication interfaces	Only RM3544-01 Select from RS-232C, PRINTER (RS-232C), or USB Remote function, communications monitor function, data output function
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 15 VA max.
Dimensions and mass	215 mm (8.46 in) W × 90 mm (3.54 in) H × 166 mm (6.54 in) D [RM3544] 0.9 kg (3.1 oz), [RM3544-01] 1.0 kg (3.3 oz)
	[RM3544] Power cord >1, Clip type lead L2101 >1, Instruction manual >1, Spare fuse >1
Included accessories	[RM3544-01] Power cord >1, Clip type lead L2101 >1, Male EXT I/O connector >1, Instruction manual >1, Application disc >1, USB cable (A-to-B type) >1, Spare fuse >1

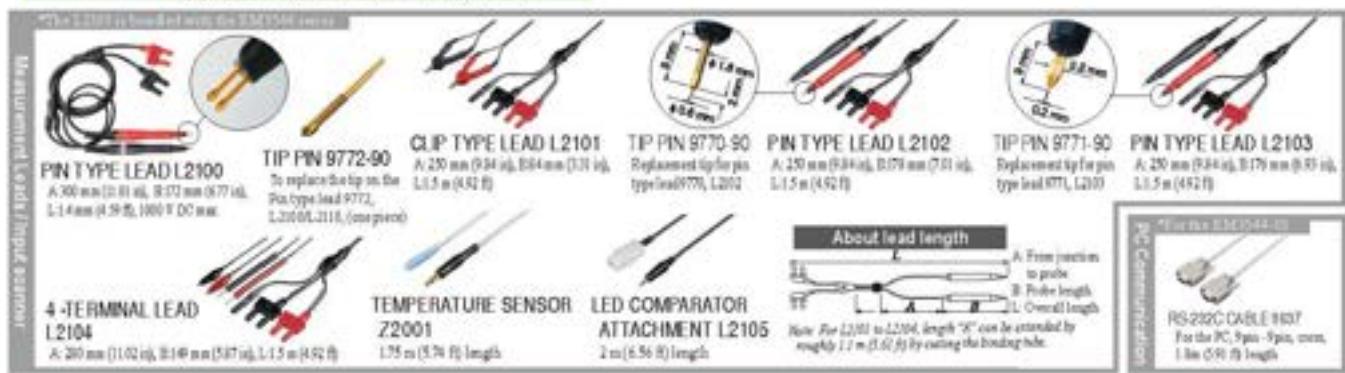

Resistance Meter for Ultra-low and Low Shunt Resistance

RESISTANCE HiTESTER RM3543



- Advanced enough to measure 0.1 m Ω shunts with room to spare at ±0.10% accuracy & 0.01 $\mu\Omega$ resolution performance
- Superb repeatable measurement accuracy
- Advanced contact-check, comparator, and data export functions
- Intuitive user interface and strong noise immunity are ideal for automated systems

Model No. (Order Code) RM3543
RM3543-01 (Built-in GP-IB interface)

Test fixtures are not supplied with the unit. Select an optional test fixture when ordering.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement method	Four-terminal, constant-current DC
Resistance range	90 m Ω (max. 12.00000 m Ω , 0.01 $\mu\Omega$ resolution) to 1000 Ω range (max. 1200.000 Ω , 1 Ω resolution), 6 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[at 10 m Ω range, with SLOW mode, average 16 times setting] ±0.060 % rdg. ±0.001 % f.s.
Testing current	[at 10 m Ω range] 1 A DC to [at 1000 Ω range] 1 mA DC
Open-terminal voltage	20 V DC max. Note: Voltage when not measuring in 20 m Ω or less, with current mode set at PULSE and Contact Improver Setting set at OFF/PULSE (measured with a voltmeter having 10 M Ω)
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Integration time	[at 10 m Ω range, default value] FAST 2.0 ms, MED 5.0 ms, SLOW 1 PLC, Setting range: 0.1 ms to 1000 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz. Note: PLC = one power line cycle (square wave-form period)
Other functions	Comparator (compares setting value with measurement value), Delay, GVC (offset voltage compensation), Average, Measurement fault detection, Probe short-circuit detection, Improve contact, Current mode setting (A pulse application function that applies current only during measurement), Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, etc.
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (Model RM3543-01)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal, Service power output +5V, +12V, etc.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 40 VA max.
Dimensions and mass	260 mm (10.24 in) W × 88 mm (3.46 in) H × 300 mm (11.81 in) D, 3.0 kg (6.61 lb)
Included accessories	Power cord >1, EXT I/O male connector >1, Instruction manual >1, Operation guide >1



Resistance Meters

High-Speed Resistance Meter Ideal for Automated Lines; Compatible with Super-Small Electronic Components

RESISTANCE METER RM3542A



GP-IB
RS-232C



- Applied voltage limit function lets you switch the detection voltage to 5 V or less
- Contact improvement function suppresses rush current to aid in probing of super-small components
- Extensive selection of measurement ranges ensures the right detection voltage and delivers stable measurement
- Scaling function corrects for mounting state and test stage differences

Model No. (Order Code) RM3542-50

RM3542-51 (Built-in GP-IB interface)

Test fixtures are not supplied with the unit. Please select an optional test fixture when ordering.

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	[at Low Power OFF] 100 mΩ range (max. 120,000 mΩ, 0.1 μΩ resolution) to 100 MΩ range (max. 120,000 MΩ, 100 Ω resolution), 16 steps [at Low Power ON] 1000 mΩ range (max. 1200,000 mΩ, 1 μΩ resolution) to 1000 Ω range (max. 1200,000 Ω, 1 mΩ resolution), 6 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[with SLOW mode, at 100 mΩ range] ±0.015 % rdg ±0.002 % Es. [with SLOW mode, at 1000 Ω range] ±0.006 % rdg ±0.001 % Es. (best case)
Testing current	[at 100 mΩ range] 300 mA DC to [at 100 MΩ range] 100 nA DC
Open-terminal voltage	20 V DC max. (with applied voltage limit function enabled: 10 V DC max.)
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Measurement times	[at 100 Ω /1000 Ω /10000 Ω ranges, with Low Power OFF] FAST: 0.9 ms, MED: 3.6 ms, SLOW: 17 ms (minimum time)
Integration time	0.1 ms to 1000 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz <i>Note: PLC = one power line cycle (main wave-form period)</i>
Other functions	Comparator (compare setting value with measurement value), Delay (set to allow mechanical delay of trigger input and probing, or set to allow for measurement object response), Applied Voltage Limit Function, Scaling Function, OVC (offset voltage compensation), Measurement fault detection, Probe short-circuit detection, Improve contact, Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, Sample printing, etc.
Interfaces	RS-232C, Printer (RS-232C), GP-IB (Model RM3542-51)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 30 VA max.
Dimensions and mass	260 mm (W) × 88 mm (D) × 300 mm (H) (8.1 in) D, 2.9 kg (6.43 lb)
Included accessories	Power cord x1, EXT. 10Ω male connector x1, Instruction manual x1, Operation guide x1

Other options: refer to the detailed catalog



Measure in as Fast as 0.9 ms, Optimized for Automated Systems

RESISTANCE HITESTER RM3542



GP-IB
RS-232C



- High speed and accuracy maximize productivity in automated systems
- Multiple checking functions ensure proper contact for reliable measurements
- Low-power resistance mode measures chip inductors and EMC suppression components
- Supports sample inspections during the manufacturing process

Model No. (Order Code) RM3542

RM3542-01 (Built-in GP-IB interface)

Test fixtures are not supplied with the unit. Please select an optional test fixture when ordering.

■ Basic specifications (Accuracy guaranteed for 1 year)


Resistance range	[at Low Power OFF] 100 mΩ range (max. 120,000 mΩ, 0.1 μΩ resolution) to 100 MΩ range (max. 120,000 MΩ, 100 Ω resolution), 16 steps [at Low Power ON] 1000 mΩ range (max. 1200,000 mΩ, 1 μΩ resolution) to 1000 Ω range (max. 1200,000 Ω, 1 mΩ resolution), 6 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[with SLOW mode, at 100 mΩ range] ±0.015 % rdg ±0.002 % Es. [with SLOW mode, at 1000 Ω range] ±0.006 % rdg ±0.001 % Es. (best case)
Testing current	[at 100 Ω /1000 Ω /10000 Ω ranges, with Low Power OFF] FAST: 0.9 ms, MED: 3.6 ms, SLOW: 17 ms (minimum time)
Open-terminal voltage	20 V DC max.
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Measurement times	[at 100 Ω /1000 Ω /10000 Ω ranges, with Low Power OFF] FAST: 0.9 ms, MED: 3.6 ms, SLOW: 17 ms (minimum time)
Integration time	0.1 ms to 1000 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz <i>Note: PLC = one power line cycle (main wave-form period)</i>
Other functions	Comparator (compare setting value with measurement value), Delay (set to allow for mechanical delay of trigger input and probing, or set to allow for measurement object response), OVC (offset voltage compensation), Measurement fault detection, Probe short-circuit detection, Improve contact, Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, Sample printing, etc.
Interfaces	RS-232C, Printer (RS-232C), GP-IB (Model RM3542-01)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 30 VA max.
Dimensions and mass	260 mm (W) × 88 mm (D) × 300 mm (H) (8.1 in) D, 2.9 kg (6.43 lb)
Included accessories	Power cord x1, EXT. 10Ω male connector x1, Instruction manual x1, Operation guide x1

Other options: refer to the detailed catalog



For estimating and approaching the ideal slurry internal state

Slurry Analytical System

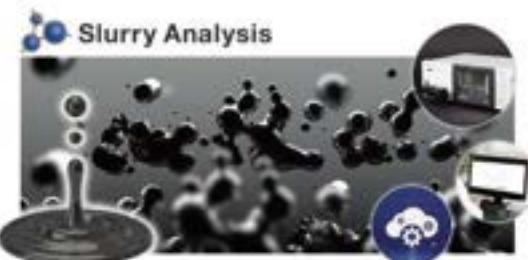

- A proprietary HIOKI algorithm analyzes impedance measured values for LIB electrode slurries.
- Analysis Results "DCR, Rratio, Uniformity" indicate electron conductivity of Slurry.
- The latest version is available anytime by a Cloud-based, easy-to-use analysis tool.
- Able to choose license plan, fit the right solution for your needs.
- Easily measure the impedance of slurry in the measurement environment recommended by HIOKI.

Model No. (Order Code)	SA2631-01	(License card, the period of use is 3 consecutive days.)
	SA2631-03	(License card, the period of use is 30 consecutive days.)
	SA2631-05	(License card, the period of use is 365 consecutive days.)
	SA9001	(ELECTRODE CELL, sold in lots of 50.)
	SA9002	(SA9001 dedicated test fixture.)
	IM3536	(DC, or 4 Hz to 8 MHz.)
	IM3536-01	(Special order product: DC, or 4 Hz to 10 MHz.)

*Please purchase electrode cells and licenses as necessary based on your expected frequency of use and experimental plan.

*Sensitive information will be shared with customers, including during use of analysis functionality. Customers are responsible for determining whether to make purchases through a retailer.

■ Basic specifications (Electrode Cell SA9001)

Material	Container: polypropylene (PP), electrode: brass (nickel plated)
Capacity	Approx. 1 mL
Electrode pin	Diameter (Area where liquid to be measured comes in contact): 3 mm ±0.1 mm Electrode interval: 6 mm ±0.3 mm
Dimensions and mass	Approx. 27W × 42H × 37D mm (3.06" W × 1.63" H × 1.46" D) (including the electrode), approx. 2.3 g (0.1 oz.)

■ Basic specifications (Test Fixture SA9002)

Measurable frequency	DC to 10 MHz
Connectable sample	SA9001 Electrode Cell
Residual impedance	Residual resistance during short circuit: 200 mΩ or less (reference for 100 Hz) Inter-electrode stray capacitance: 0.2 pF or less (reference for 1 MHz)
Dimensions and mass	Approx. 98W × 38H × 24D mm (3.86" W × 1.50" H × 0.94" D) (excluding protruding parts), approx. 210 g (0.4 oz.)
Included accessory	Shorting plate for compensation

■ Measurement conditions*

*Using an instrument other than the TMS310 or IM3536-01 - Use the Electrode Cell SA9001. The analytical algorithm assumes use of the SA9001. - Check whether the Test Fixture SA9002 can be connected to the instrument. - Acquire data under the measurement conditions listed below. - Prepare a CSV file to send to the system.

Measurement parameters	Frequency, R_s (ReZ), X (ImZ)
Frequency sweep range	4 Hz (+3 Hz) to 10 MHz (-5 MHz)
Number of measurement points	Logarithmic interval, 500 points (#10 points)
Applied signal	Constant voltage, ±100 mV

■ Available material categories

- The system uses the appropriate analytical algorithm to analyze the data based on the selected material category combination. - You may not be able to select some combinations, and some material categories may not be available. If you encounter this issue, perform the analysis using the default model. - There's no need to specify material proportions. - In some cases, the system may not be able to perform analysis. - We plan to add material categories over time.

Active materials	LCO, NMC, NCA, LMO, LFP, Graphite, LTO, Si, SiO, None
Conductive aid	Acetylene black, Carbon nanotube, Graphite
Binder	PVDF, SBR, None
Dispersant	CMC, MC, PVP, None
Solvent	NMP, Water

Quantify Composite Layer Resistance and Interface Resistance in Li-ion Battery Electrode Sheets

ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610



- Isolate and quantify composite layer resistance and interface resistance* in positive- and negative-electrode sheets used in lithium-ion batteries.
- Composite layer resistance values and interface resistance* values are helping LIBs to evolve and improve.
- *Contact resistance of current collector and material layer.
- Verify the uniformity of LIB electrode sheets.
- Visualize variations in composite layer resistance and interface resistance caused by differences in materials, composition, and manufacturing conditions.

Model No. (Order Code) **RM2610** (system product)

■ Basic specifications

Measurement target	Positive and negative electrode sheets for rechargeable lithium-ion batteries
Measurement parameters	Composite resistivity [Ωcm] Interface resistance (contact resistance) between the composite layer and current collector [Ωcm^2]
Computation method	Inverse problem analysis of potential distribution using the finite volume method
Information necessary for computation	<ul style="list-style-type: none"> Composite layer thickness [μm] (for 1 side) Current collector thickness [μm] Current collector volume resistivity [Ωcm]
Measurement time	<ul style="list-style-type: none"> Contact check + potential measurement: approx. 30 sec. Calculation: approx. 3.5 sec. (on a PC with Intel core i5-7200U CPU) <p>The measurement time may vary depending on the measurement target and the processing capacity of the PC.</p>
Measurement current	1 μA (min.) to 10 mA (max.)
Number of probes	46
Recommended PC specifications	CPU: 4 or more threads RAM: 8 GB or greater (4 GB required) Operating system: Windows 7 (64-bit), 8 (64-bit), 10 (64-bit)
Temperature measurement function	Measures temperature near the test fixture
Included accessories	TEMPERATURE SENSOR Z2001 × 1, USB cable × 1, USB license key × 1, Probe check board × 1, Power cord × 1, Instruction manual × 1

*The RM2610 (Electrode Resistance Meter) requires regular calibration. For more information about calibration, please contact your HIOKI distributor.



MAINTENANCE TOOL RM9006

Maintenance kit for cleaning probe

Battery Testers

Packed with Features to Ensure Accuracy in Multi-channel Battery Testing

SWITCH MAINFRAME SW1001, SW1002



LAN

RS-232C

USB

CE

UL

FCC

- Switch between voltmeter and battery tester while testing
- SW1001: max. 68 channels (2-wire) to max. 18 channels (4-terminal pair)
- SW1002: max. 264 channels (2-wire) to max. 72 channels (4-terminal pair)
- Circuit-design-friendly for impedance measurements that minimize errors between channels (Effect: 0.01% t.s.)
*For BT3560 100 mΩ range, 8 measurements, and a measurement frequency of 1 kHz.
- For OCV measurement, internal resistance measurement, and external potential measurement of battery cells
- Measure battery modules up to 60 V DC

Model No. (Order Code) SW1001 (8 slots)
SW1002 (12 slots)


Note: Multiplexer Modules not included with the Switch Mainframe SW1001 / SW1002. Modules must be purchased separately.

■ Basic specifications

	SW1001	SW1002
Slots	8 slots	12 slots
Supported modules	MULTIPLEXER MODULE SW9001 (2-wire/4-wire) MULTIPLEXER MODULE SW9002 (4-terminal pair)	
Connectable instruments	Max. 2 units, 2-wire × 1 + 4-wire × 1, or 2-wire × 1 + 4-terminal pair × 1	
Max. input voltage	60 V DC (Cannot connect to battery pack in excess of 60 V DC), 30 V AC rms, 42.4 V peak, Maximum rated voltage to ground: 60 V DC	
Communication IF	LAN, USB, RS-232C (for host, for measurement instruments)	
Functions	Channel switching, wiring method, scan function, communication command transmission, etc.	
Power supply	100 to 240 V AC / 30 VA (50/60 Hz)	
Dimensions and mass	215 mm (8.46 in) W × 132 mm (5.20 in) H × 420 mm (16.54 in) D, 3.7 kg (8.15 lb)	430 mm (16.93 in) W × 132 mm (5.20 in) H × 420 mm (16.54 in) D, 6.0 kg (13.6 lb)
Included accessories	Power cord × 1, instruction manual × 1, usage precautions × 1, USB driver CD × 1	

■ Basic specifications for MULTIPLEXER MODULE

	SW9001	SW9002
Wiring method	2-wire or 4-wire	4-terminal pair (6-wire) or 2-wire
No. of channels	2 channels (2-wire) / 1 channel (4-wire)	6 channels (4-terminal pair) / 3 channels (2-wire)
Contact method	Armature relays	
Chained switching time	11 ms (including measurement time)	
Max. allowable voltage	60 V DC, 30 V AC rms, 42.4 V peak	
Max. allowable current	1 A DC, 1 A AC rms	1 A DC, 1 A AC rms (2-wire), 2 A DC, 2.8 A AC rms (4-wire)
Max. allowable power	30 W (positive lead)	
Max. rated voltage to ground	60 V DC	
Dimensions and mass	25.5 mm (1.00 in) W × 100 mm (3.93 in) H × 237 mm (9.12 in) D, 21.0 g (0.74 oz)	25.5 mm (1.00 in) W × 100 mm (3.93 in) H × 237 mm (9.12 in) D, 196 g (6.9 oz)
Included accessories	Instruction manual × 1	

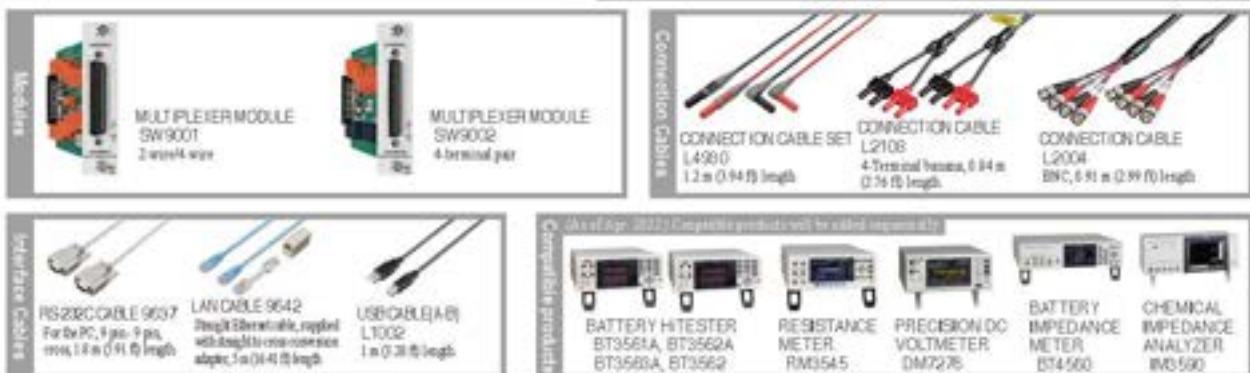

Efficiently and Safely Validate Battery Management Systems

BATTERY CELL VOLTAGE GENERATOR SS7081-50

LAN

CE



- Build a highly accurate BMS validation environment easily and safely ("BMS : Battery Management System")
- Use as voltage generator or simulated battery in place of actual batteries and power supplies to establish an efficient testing environment

Model No. (Order Code) SS7081-50

Control PC, control software, BMS wiring, etc., not included.

■ Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	12 ch
Maximum in-series connections	In-series connections of instrument up to and including a maximum in-series output voltage of 1000 V
Output range	DC voltage: 0.0000 V to 5.0250 V (independently for all channels) Maximum output current: ±1.00000 A (independently for all channels)
Measurement range	DC voltage: -0.00100 V to 5.00000 V DC current (2-range architecture): ±1.20000 A (0.1 Amp), ±120.000 μA, 0.010 μA (amp)
Integration time	1 PLC (0.1 Hz, 20 ms, 60 Hz, 31.7 ms) × number of smoothing iterations (user-configured)
Voltage output accuracy	±0.0150% of setting ±500 μV
Voltage measurement accuracy	±0.0100% of reading ±100 μV
Current measurement accuracy	1 A range: ±0.000% of reading ±100 μA 100 μA range: ±0.0350% of reading ±10 nA
Interfaces	LAN
Power supply	Universal (100 V to 240 V AC), 50 Hz / 60 Hz
Dimensions and mass	430 (16.93 in) W × 132 (5.20 in) H × 483 (19.05 in) D, 10.3 kg (22.7 lb)
Included accessories	User manual × 1, power cord × 1, rack frame × 1, disk with computer application × 1 (available within the range of application specifications)

Battery Testers

Fully automated production line testing of small cells for power motors or small packs of up to 60 V

BATTERY HiTESTER BT3561A



LAN

RS-232C

CE

CUL

**3-year
Warranty**

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of small cells for power motors or small packs of up to 60 V
- Resistance measurement ranges: 30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V
- Equipped with LAN

Model No. (Order Code) **BT3561A**

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA) 300 mΩ (Max. display: 31.000 mΩ, resolution: 10 μΩ, measurement current: 10 mA) 3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA) 30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 300 Ω (Max. display: 31.000 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
	Basic accuracy: ±0.5% rdg ±3 dgt (3 Ω dgt), ±2 dgt (FAST, MED, MEDIUM add) Measurement frequency: 1 kHz ±0.2 Hz Measurement method: AC four-terminal method
Voltage measurement ranges	6 V (Max. display: 6.00000 V, resolution: 10 μV) 60 V (Max. display: 60.0000 V, resolution: 100 μV)
	Basic accuracy: ±0.01% rdg ±3 dgt (6 V dgt), ±2 dgt (FAST, MED, MEDIUM add)
Response time	10 ms
Sampling period	Q or V (50 Hz): 4 ms (EX, FAST), 12 ms (FAST), 35 ms (MEDIUM), 120 ms (SLOW) QV (50 Hz): 8 ms (EX, FAST), 24 ms (FAST), 70 ms (MEDIUM), 250 ms (SLOW)
Functions	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Counter (500000), Statistical calculations (Max: 30,000), Delay, Average, Peak storage/loading, Memory storage, LabVIEW® driver
Interfaces	LAN (TCPIP, IEEE802.3U/IEEE802.3ABE-TX) RS-232C (Max: 38.4 kbps, Available as printer I/F) EXT I/O (37-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Power supply	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in) W × 10 mm (0.39 in) H × 295 mm (11.61 in) D, 2.4 kg (5.37 lb)
Included accessories	Instruction manual (CD), Power cord (1.5 m), Operating Instructions (CD)

Fully Automated Production Line Testing of Large Cells for xEVs or Mid-sized Packs of up to 100 V

BATTERY HiTESTER BT3562A



LAN

RS-232C

CE

CUL

**3-year
Warranty**

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of large cells for xEVs or mid-sized packs of up to 100 V
- Resistance measurement ranges: 3 mΩ/30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V/100 V
- Equipped with LAN

Model No. (Order Code) **BT3562A**

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	3 mΩ (Max. display: 3.1000 mΩ, resolution: 0.1 μΩ, measurement current: 100 mA) 30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA) 300 mΩ (Max. display: 31.000 mΩ, resolution: 10 μΩ, measurement current: 10 mA) 3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA) 30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 300 Ω (Max. display: 31.000 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
	Basic accuracy: ±0.5% rdg ±3 dgt (3 mΩ range: ±30 dgt, ±10 dgt (FAST), ±5 dgt (MED, MEDIUM add); ±0.5% rdg ±5 dgt (30 mΩ range or more: ±3 dgt (EX, FAST), ±2 dgt (FAST, MED, MEDIUM add)) Measurement frequency: 1 kHz ±0.2 Hz Measurement method: AC four-terminal method
Voltage measurement ranges	6 V (Max. display: 6.00000 V, resolution: 10 μV) 60 V (Max. display: 60.0000 V, resolution: 100 μV) 100 V (Max. display: 100.000 V, resolution: 1 mV)
	Basic accuracy: ±0.01% rdg ±3 dgt (6 V dgt), ±2 dgt (FAST, MED, MEDIUM add)
Response time	10 ms
Sampling period	Q or V (50 Hz): 4 ms (EX, FAST), 12 ms (FAST), 35 ms (MEDIUM), 120 ms (SLOW) QV (50 Hz): 8 ms (EX, FAST), 24 ms (FAST), 70 ms (MEDIUM), 250 ms (SLOW)
Functions	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Counter (500000), Statistical calculations (Max: 30,000), Delay, Average, Peak storage/loading, Memory storage, LabVIEW® driver
Interfaces	LAN (TCPIP, IEEE802.3U/IEEE802.3ABE-TX) RS-232C (Max: 38.4 kbps, Available as printer I/F) EXT I/O (37-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Power supply	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in) W × 10 mm (0.39 in) H × 295 mm (11.61 in) D, 2.4 kg (5.37 lb)
Included accessories	Instruction manual (CD), Power cord (1.5 m), Operating Instructions (CD)

BT3561A/BT3562A/BT3563A/BT3564MBT3563/BT3562 Series Shared Options

Measurement Leads A (for measuring high voltage batteries)



PIN TYPE LEAD L2100

A:300 mm (11.81 in),
B:37 mm (1.47 in),
L:940 mm (3.93 ft),
For high voltage battery measurements, 1000 V DC max.



PIN TYPE LEAD L2110

A:750 mm (29.53 in),
B:25 mm (0.98 in),
L:1880 mm (6.17 ft),
For high voltage battery measurements, 1000 V DC max.



TIP PIN 9772-90
To replace the tip in the Pin type lead
L2100, L2110, L2110-2110,
(one piece).

Battery Testers

Fully Automated Production Line Testing of Large Packs for xEVs or Large Packs of up to 300 V

BATTERY HiTESTER BT3563A



LAN

RS-232C

CE

UL

RoHS

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of large packs for xEVs or large packs of up to 300 V
- Resistance measurement ranges: 3 mΩ/30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V/300 V
- Equipped with LAN

Model No. (Order Code) **BT3563A**

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	3 mΩ (Max. display: 3,1000 mΩ, resolution: 0.1 μΩ, measurement current: 100 mA) 30 mΩ (Max. display: 31,000 mΩ, resolution: 1 μΩ, measurement current: 10 mA) 300 mΩ (Max. display: 310,000 mΩ, resolution: 10 μΩ, measurement current: 1 mA) 3 Ω (Max. display: 3,1000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 30 Ω (Max. display: 31,000 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 310,000 Ω, resolution: 100 mΩ, measurement current: 1 μA)
Voltage measurement ranges	Basic accuracy: ±0.5% rdg ±10 digit (3 mΩ range) ±30 digit (EX.FAST), ±10 digit (FAST), ±5 digit (MEDIUM) add) ±0.5% rdg ±5 digit (30 mΩ range or more) ±3 digit (EX.FAST), ±2 digit (FAST, MEDIUM) add) Measurement frequency: 1 kHz to 0.2 Hz Measurement method: AC four-terminal method
Response time	6 V (Max. display: 6,00000 V, resolution: 10 μV) 60 V (Max. display: 60,0000 V, resolution: 100 μV) 300 V (Max. display: 300,000 V, resolution: 1 mV)
Sampling period	Basic accuracy: ±0.01% rdg ±3 digit (±3 digit (EX.FAST), ±1 digit (FAST, MEDIUM) add)
Functions	10 ms 0 Ω/V (80 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW) 0 V/DV (80 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 250 ms (SLOW) 0 Ω/V (50 Hz): 4 ms (EX.FAST), 12 ms (FAST), 42 ms (MEDIUM), 157 ms (SLOW) 0 V/DV (50 Hz): 8 ms (EX.FAST), 24 ms (FAST), 84 ms (MEDIUM), 254 ms (SLOW)
Interfaces	Contact check, Zero adjustment (4000 counts), Pulse measurement, Comparator (H/L/DN/Lc), Statistical calculations (Max: 30,000), Delay, Average, Panel swing/Loading, Memory storage, LabVIEW® driver
Power supply	LAN (TCP/IP; 10BASE-T/100BASE-TX) RS-232C (Max: 38.4 kbps, Available as printer IP) EXT I/O (7-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Dimensions and mass	100 to 240 V AC, 50 Hz/60 Hz, 30 VA max.
Included accessories	215 mm (8.46 in) W × 80 mm (3.15 in) H × 295 mm (11.61 in) D, 2.4 kg (5.31 oz)

1000V Maximum Input Voltage, High-Voltage Battery Tester for Measuring EV and PHEV Battery Packs

BATTERY HiTESTER BT3564



GP-IB

RS-232C

CE

RoHS

- Measure high-voltage battery packs up to 1000V
- Production line testing of high-voltage battery packs for EV, PHEV
- 0.1 Ω to 3000 Ω internal resistance range (pack total resistance, bus bar resistance)
- Spark discharge reduction function
- Analog output function
- Optional measurement probe available for 1000 V and high-voltage battery packs

Model No. (Order Code) **BT3564**

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

■ Basic specifications (Accuracy guaranteed for 1 year)

Max applied measurement voltage	±1000 VDC rated input voltage. ±1000 VDC max. rated voltage to earth
Resistance measurement ranges	3 mΩ (Max. display: 3,1000 mΩ, resolution: 0.1 μΩ) to 3000 Ω (Max. display: 310,000 Ω, resolution: 0.1 Ω), 7 ranges Accuracy: ±0.5% rdg ±3 digit (3 mΩ to 3000 Ω range), ±0.5% rdg ±10 digit (3 mΩ range) Testing source frequency: 1 kHz ±0.2 Hz, testing current: 100 mA (3 mΩ range) to 10 μA (3000 Ω range) Open terminal Voltage: 25 V peak (30 mΩ range), 7.5 V peak (300 mΩ range), 4 V peak (3 Ω to 3000 Ω range)
Voltage measurement ranges	10 V DC (resolution: 10 μV) to 1000 V DC (resolution: 1 mV), 3 ranges Accuracy: ±0.01% rdg ±3 digit
Display	31000 full digits (resistance), 999999 full digits (voltage, 1000 V range: 999999 or 110000), LED
Sampling time	FAST: 12 ms, MEDIUM: 35 ms, SLOW: 253 ms (Typ., sampling time depends on supply frequency settings and function)
Total measurement time	Response time + sampling time (Response time for both resistance and voltage are reference value of about 700 ms, depends on measurement object)
Comparator functions	Judgment result: H/L/DN/Lc (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results Error display, beeper, or external I/O output (open-collector, 35V, 50 mA DC max.)
Analog output	Measured resistance (displayed value, from 0 to 3.1 V DC)
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	215 mm (8.46 in) W × 80 mm (3.15 in) H × 295 mm (11.61 in) D, 2.4 kg (5.31 oz)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1

About probe length



BT3561A/BT3562A/BT3563A/BT3564/BT3565/BT3562 Series Shared Options

Measurement Leads B (for measuring batteries up to 60 V)

1.8 mm dia. single-wire type for measuring small electrodes
0.2 mm parallel pyramid-type pins for measuring all the others and sub-meter-size objects

PIN TYPE LEAD BT770	TIP PIN 9770-90	PIN TYPE LEAD 9771	TIP PIN 9771-90
A: 260 mm (10.24 in), B: 16 mm (0.63 in), L: 300 mm (11.81 in), 60 VDC	Replacement tip for pin type lead BT770, L2921 A: 260 mm (10.24 in), B: 16 mm (0.63 in), L: 300 mm (11.81 in), 60 VDC		

Measurement Leads C (for measuring batteries up to 60 V)

CUP TYPE LEAD L2107	FOUR TERMINAL LEAD 9453	LARGE CUP TYPE LEAD 9467
A: 130 mm (5.12 in), B: 10 mm (0.39 in), L: 100 mm (3.94 in), 60 VDC	A: 200 mm (7.87 in), B: 10 mm (0.39 in), L: 140 mm (5.51 in), 60 VDC	A: 300 mm (11.81 in), B: 10 mm (0.39 in), L: 120 mm (4.72 in), tip φ 20 mm (0.787 in), 60 VDC

Cannot be used for BT3561/3562/3563/3564

OPT. 0 ADU BOARD Z5038
For L2107, L2110, L2030, L46510, 9772

PC communication
RS-232C CABLE 9607
For the PC, tip φ 20 mm (0.787 in), 60 VDC
GP-IB CONNECTOR CABLE 915142
2 m (6.56 ft) length

Battery Testers

High-speed Measurement from Large-cell to High-voltage Battery Testing

BATTERY HITESTER BT3563-01, BT3562-01



GP-IB
RS-232C

CE

3 years
Warranty

- Measure high-voltage battery packs up to 300V (BT3563-01)
- Measure the voltage of battery packs up to 60V (BT3562-01)
- Production line testing of high-voltage battery packs and battery modules
- Large (low-resistance) cell testing
- Choice of IFC Interfaces for full remote operation

Note: The comparison threshold values depend on the battery manufacturer, type, and capacity, and these must be established by the user.

Model No. (Off/On) BT3563-01 (Built-in GP-IB and analog output)
BT3562-01 (Built-in GP-IB and analog output)

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the ECT DIO connector is also available. Please inquire with your Hioki distributor.

■ Basic specifications (Accuracy guaranteed for 1 year)

	BT3563-01	BT3562-01
Max. applied measurement voltage	±300 VDC rated input voltage ±300 VDC max. rated voltage to earth	±60 VDC rated input voltage ±70 VDC max. rated voltage to earth
Resistance measurement ranges	3 mΩ (max. display 3.3000 mΩ, resolution 0.1 μΩ) to 3000 Ω (max. display 31000 Ω, resolution 100 μΩ), 7 ranges Accuracy: ±0.02% rdg ± 5 digit (Add ± 3 digit for EX.FAST, or ± 2 digit for FAST and MEDIUM)	3 mΩ range, ± 0.5% rdg ± 10 digit (Add ± 30 digit for EX.FAST, or ± 10 digit for FAST, or ± 5 digit for MEDIUM) Testing source frequency: 1 kHz ± 0.2 Hz, testing current: 100 mA (3 mΩ range) to 10 μA (3000 Ω range) Open terminal Voltage: 25 V peak (300 mΩ range), 7 V peak (300 mΩ range), 4 V peak (3000 Ω range)
Voltage measurement ranges	6 VDC (resolution 10 μV) to 300 VDC (resolution 1 mV), 3 ranges Accuracy: ± 0.01% rdg ± 3 digit (Add ± 3 digit for EX.FAST, or ± 2 digit for FAST and MEDIUM)	6 VDC (resolution 10 μV) to 60 VDC (resolution 100 μV), 2 ranges
Display	10000 full digits (resistance), 600000 full digits (voltage), LED	Four steps, 4 ms (Extra-FAST), 12 ms (FAST), 35 ms (Medium), 150 ms (Slow) (Typ., sampling time depends on supply frequency settings and function.)
Sampling rate		
Measurement time	Response time + sampling rate, approx. 10 ms for measurements (Response time depends on reference values and the measurement object)	
Comparator functions	Judgment result: H/D/MLO (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PARM/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external DIO output, Open-call editor (35 V, 50 mA DC max.)	
Analog output	Measured resistance (displayed value, from 0 to 31 V DC)	
Interfaces	External I/O, RS-232C, Printer (RS-232C), GPIB (-01 suffix models only)	
Power supply	100 to 240 VAC, 50/60 Hz, 30 VA max.	
Dimensions and mass	415 mm (8.46 in) W × 80 mm (3.15 in) H × 295 mm (11.61 in) D, 2.4 kg (5.47 oz)	
Included accessories	Instruction manual × 1, Power cord × 1	

Battery Testers

For High-speed Production Line Testing of Small Battery Packs

BATTERY HITESTER 3561



GP-IB
3561-01
RS-232C

CE
3 years
Warranty

- High-speed testing for production lines of small battery packs for mobile and portable communications devices
- Measure internal resistance and battery voltage
- For process control such as in high-speed automated assembly lines

Note: The comparison threshold values depend on the battery manufacturer, type, and capacity, and these must be established by the user.

Model No. (Off/On) 3561-01 (Built-in GP-IB interface)

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the ECT DIO connector is also available. Please inquire with your Hioki distributor.

■ Basic specifications (Accuracy guaranteed for 1 year)

Max. applied measurement voltage	±22 VDC ±60 V DC maximum rated voltage above ground
Resistance measurement ranges	300 mΩ (max. display 300.00 mΩ, resolution 10 μΩ) to 3 Ω (max. display 3.000 Ω, resolution 100 μΩ), 2 ranges Accuracy: ±0.5% rdg ± 5 digit (Add ± 3 digit for EX.FAST, or ± 2 digit for FAST and MEDIUM)
Voltage measurement ranges	DC 20 V, resolution 0.1 mV, Accuracy: ±0.01% rdg ± 3 digit (Add ± 3 digit for EX.FAST, or ± 2 digit for FAST and MEDIUM)
Display	10000 full digits (resistance), 199999 full digits (voltage), LED
Sampling rate	Four steps, 4 ms (Extra-FAST), 12 ms (FAST), 35 ms (Medium), 150 ms (Slow) (Typ., sampling time depends on supply frequency settings and function.)
Measurement time	Response time + sampling rate, approx. 3 ms for measurements (Response time depends on reference values and the measurement object)
Comparator functions	Judgment result: H/D/MLO (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PARM/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external DIO output, Open-call editor (35 V, 50 mA DC max.)
Interfaces	External I/O, RS-232C, Printer (RS-232C), GPIB (-01 suffix models only)
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	215 mm (8.46 in) W × 80 mm (3.15 in) H × 295 mm (11.61 in) D, 2.4 kg (5.47 oz)
Included accessories	Instruction manual × 1, Power cord × 1

Measurement Leads B (for measuring batteries up to 60 V)

1.6 mm dia. single-axis type for measuring small electrodes	0.2 mm parallel pin-type probe for measuring thin foils and sub-millimeter objects
PIN TYPE LEAD 9770 A: 260 mm (10.24 in), B: 140 mm (5.51 in), L: 850 mm (3.39 ft), 60V DC L2992	TIP PIN 9770-B0 Replacement tip for pin type lead 9770, L2992
PIN TYPE LEAD 9771 A: 240 mm (9.45 in), B: 130 mm (5.12 in), L: 850 mm (3.39 ft), 60V DC L2993	TIP PIN 9771-B0 Replacement tip for pin type lead 9771, L2993

About probe length



Measurement Leads C (for measuring batteries up to 60 V)

CLIP TYPE LEAD L2107 A: 130 mm (5.12 in), B: 83 mm (3.27 in), L: 1000 mm (0.41 ft), 60 VDC	FOUR TERMINAL LEAD 9453 A: 210 mm (8.27 in), B: 119 mm (4.65 in), L: 1384 mm (4.46 ft), 60 VDC	LARGE CLIP TYPE LEAD 9467 A: 340 mm (13.46 in), B: 118 mm (5.16 in), L: 1359 mm (4.43 ft), tip: 28 mm (1.18 in), 60 VDC
--	--	---

Measurement Leads

RS-232C CABLE 9607
For the PC, Spec.: 4-pins,
core: 1.6 mm (0.06 ft) length
GP-IB CONNECTOR
CABLE 9451-02
2 m (6.5 ft) length

Battery Testers

Achieve Long Service Life Battery Modules by Measuring Reaction Resistance

BATTERY IMPEDANCE METER BT4560



USB

RS-232C

CE

UL
cUL
CSA

- Low-frequency AC-IR measurement*: Measure the reaction resistance of a battery
- The BT4560 measures battery cell quality by measuring internal impedance at a low frequency of 10Hz or below.
- Extremely reliable measurements for low-impedance batteries
- The BT4560 uses a testing current of 1.5 A at the 3mΩ range, which improves the S/N ratio.
- Circuit configuration highly tolerant of contact and wire resistance to provide stable measurements
- Voltage measurement function equivalent to 6-digit DMM ($\pm 0.0003\%$ rdg)

Model no. (Order Code) BT4560

Note: This product is not supplied with measurement probes. Please select and purchase the measurement probe option appropriate for your application separately.

■ Basic specifications (Accuracy guaranteed for 1 year)

Allowable input voltage	Up to 5 V
Measured information	
Impedance measurement	Parameters: R, X, Z, G, Frequency: 0.1 Hz to 1050 Hz; Measurement ranges: 3.0000 mΩ, 10.0000 mΩ, 100.000 mΩ Testing current: 3 mA range: 1.5 Arms, 10 mA range: 500 mAmps, 100 mA range: 50 mAmps
Voltage measurement	Measurement range: 5.00000 V (single range); Measurement time: 0.1 s (Fast) to 10 s (Slow)
Temperature measurement	Range: -10.0 °C to 60.0 °C; Measurement time: 2.3 s
Basic accuracy	Z: $\pm 0.01\%$ rdg, 0: $\pm 0.1\%$, V: $\pm 0.0003\%$ rdg ± 5 digit, Temperature: ± 0.5 °C (-10.0 to 40.0 °C)
Functions	Comparator, self-calibration, sample delay, average, contact check, measurement current error, and other
Interfaces	RS-232C/USB (virtual COM port) * Cannot be used simultaneously EXTE I/O (NPN/PNP can be switched)
Power supply	100 to 240 V AC, 50/60 Hz, 80 VA max
Dimensions and mass	330 mm (12.99 in) W x 80 mm (3.15 in) H x 290 mm (11.54 in) D, 3.7 kg (130.5 oz)
Included accessories	Power cord x1, Instruction manual x1, Zero-adjustment board x1, USB cable (A-B type) x1, CD-R (communication instruction manual, PC application software, USB driver) x1



CLIP TYPE PROBE L2002
Cable length: 1.5 m (4.92 ft) length



PIN TYPE PROBE L2003
Cable length: 1.5 m (4.92 ft) length



TIP PIN 9772-90
To replace the tip on the Pin-type lead L2003 (see page)



TEMPERATURE SENSOR
Z2005
Cable length: 1 m (3.28 ft) length



RS-232C CABLE 9637
For PC, 9pin - 9pin, min, 1.0m(3.28 ft) length

Battery Testers

Even Speedier Diagnosis of the Deterioration of Lead-acid Batteries Including UPS

BATTERY TESTER BT3554-50



USB

CE

3 Years

Bluetooth®

When Z3210 is installed

- Battery measurement can be performed while the battery is connected to its host device, without taking it offline
- Measure and save data in as fast as 2 seconds, a 60% improvement from the legacy 3554
- Instantaneously diagnose battery degradation (PASS, WARNING, FAIL) by measuring internal resistance and voltage¹
- Noise reduction technology improves noise resistance
- Screen and audio² guidance simplifies measurement
- Measurement data is linked to site information and saved, reducing management man-hours
- A variety of measurement data can be centrally managed using Hioki's GENNECT Cross app³
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel⁴ file. (Wireless Adapter Z3210 is necessary)
- New protector delivers better ergonomic hold and durability in the field.

Model No. (Order Code): **BT3554-50** (Pin Type Lead not included)

BT3554-51 (Bundled with Pin Type Lead 9465-10)

BT3554-52 (Bundled with Pin Type Lead L2020)

BT3554-91 (BT3554-51 + Wireless Adapter Z3210)

BT3554-92 (BT3554-52 + Wireless Adapter Z3210)

¹ The threshold for determining the pass/fail condition of a battery depends on the specification and standards of the battery manufacturer, factory type, capacity, etc. An important and accurate way to always conduct battery testing against the external resistance and internal voltage of a new or reference battery. In some cases, it may be difficult to determine the deterioration state of individual storage batteries used in additive batteries which deteriorate smaller changes in internal resistance than overall lead acid batteries. ² Audio functionality Bluetooth® connected device. ³ Data can be downloaded to tablets and smartphones using Hioki's dedicated app available from Google Play or App Store. When using the Z3210

⁴ Data can be downloaded to tablets and smartphones using Hioki's dedicated app available from the Google Play or App Store. Search for "HIKOKI" and download the "GENNECT Cross" app.



Windows, Google Play and the Google Play logo are trademarks of Google Inc.

Hioki is a registered trademark of Hioki Technology Inc. and/or its affiliated companies in the United States and certain other countries.

iPhone, iPad, iPod, iPod nano, iPod touch and iPod classic are trademarks of Apple Inc.

Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

Microsoft, Windows, Windows Phone, and their other registered trademarks or trademarks of Microsoft Corporation and/or its affiliated companies.

Company names and product names appearing in this catalog are trademarks or registered trademarks of various companies.



The Bluetooth word mark and logo are registered trademarks owned by Bluetooth SIG, Inc. and/or one or more of its members under license.

For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

■ Basic specifications (Accuracy guaranteed for 1 year)

	BT3554-50	BT3554-51	BT3554-52
Resistance measurement range	3 mΩ (max. display 3.100 mΩ, resolution 1 μΩ) to 3 Ω (max. display 3.100 Ω, resolution 1 mΩ), 4 ranges	3 mΩ (max. display 3.100 mΩ, resolution 1 μΩ) to 3 Ω (max. display 3.100 Ω, resolution 1 mΩ), 4 ranges	3 mΩ (max. display 3.100 mΩ, resolution 1 μΩ) to 3 Ω (max. display 3.100 Ω, resolution 1 mΩ), 4 ranges
Accuracy	±0.5% rdg ±4 dg (3 mΩ range), ±1.0% rdg ±8 dg (3 Ω range)	±0.5% rdg ±4 dg (3 mΩ range), ±1.0% rdg ±8 dg (3 Ω range)	±0.5% rdg ±4 dg (3 mΩ range), ±1.0% rdg ±8 dg (3 Ω range)
Testing source frequency	1 kHz ±30 Hz	1 kHz ±30 Hz	1 kHz ±30 Hz
With function for avoiding noise frequency enabled	1 kHz ±30 Hz	1 kHz ±30 Hz	1 kHz ±30 Hz
Testing current	10 mA (3 mΩ/30 mΩ range), 16 mA (300 mΩ range), 1.6 mA (3 Ω range)	10 mA (3 mΩ/30 mΩ range), 16 mA (300 mΩ range), 1.6 mA (3 Ω range)	10 mA (3 mΩ/30 mΩ range), 16 mA (300 mΩ range), 1.6 mA (3 Ω range)
Open terminal Voltage	5 V	5 V	5 V
Voltage measurement range	4.6 V (max. display 46.000 V, resolution 1 mV) to 0.0 V (max. display ±0.0 V, resolution: 10 mV), 2 ranges, Accuracy: ±0.08% rdg ±4 dg	4.6 V (max. display 46.000 V, resolution 1 mV) to 0.0 V (max. display ±0.0 V, resolution: 10 mV), 2 ranges, Accuracy: ±0.08% rdg ±4 dg	4.6 V (max. display 46.000 V, resolution 1 mV) to 0.0 V (max. display ±0.0 V, resolution: 10 mV), 2 ranges, Accuracy: ±0.08% rdg ±4 dg
Temperature measurement accuracy	-40.0°C to 60°C (14°F to 140°F), Maximum display: 60.0°C (140.0°F), Resolution 0.1°C (0.1°F), Measurement accuracy: ±1.0°C (±1.8°F)	-40.0°C to 60°C (14°F to 140°F), Maximum display: 60.0°C (140.0°F), Resolution 0.1°C (0.1°F), Measurement accuracy: ±1.0°C (±1.8°F)	-40.0°C to 60°C (14°F to 140°F), Maximum display: 60.0°C (140.0°F), Resolution 0.1°C (0.1°F), Measurement accuracy: ±1.0°C (±1.8°F)
Temperature probe	When using the Clip Type Lead with Temperature Sensor 9448	When using the Clip Type Lead with Temperature Sensor 9448	When using the Clip Type Lead with Temperature Sensor 9448
When using the Temperature Probe 9451, add ±0.5°C (±0.9°F) (cable length: 1.5 m [59.1"])	When using the Temperature Probe 9451, add ±0.5°C (±0.9°F) (cable length: 1.5 m [59.1"])	When using the Temperature Probe 9451, add ±0.5°C (±0.9°F) (cable length: 1.5 m [59.1"])	
When using the Temperature Probe 9452, add ±0.5°C (±0.9°F) (cable length: 0.1 m [3.94"])	When using the Temperature Probe 9452, add ±0.5°C (±0.9°F) (cable length: 0.1 m [3.94"])	When using the Temperature Probe 9452, add ±0.5°C (±0.9°F) (cable length: 0.1 m [3.94"])	
BT3554-50 standard accuracy with simulated input: ±0.5°C (±0.9°F)	BT3554-50 standard accuracy with simulated input: ±0.5°C (±0.9°F)	BT3554-50 standard accuracy with simulated input: ±0.5°C (±0.9°F)	
Absolute max. input voltage	60 V DC max. (No AC input)	60 V DC max. (No AC input)	60 V DC max. (No AC input)
Measurement time	300 ms	300 ms	300 ms
Response time	Approx. 1.6 sec.	Comparing measured values with set threshold values to make judgments and report them to the user. Judgment notifications include: Resultant displayed as shown below (segmed) and background color. When the Voltage value [high] Resistance value [only] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT, Resistance value [high] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT. If the judgment result is FAULT/HOLD or FAIL, the audio tone is accompanied by a red highlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (parity judgment). Settable settings: 20 tables	Comparing measured values with set threshold values to make judgments and report them to the user. Judgment notifications include: Resultant displayed as shown below (segmed) and background color. When the Voltage value [high] Resistance value [only] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT, Resistance value [high] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT. If the judgment result is FAULT/HOLD or FAIL, the audio tone is accompanied by a red highlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (parity judgment). Settable settings: 20 tables
Memory functionality	Comparing measured values with set threshold values to make judgments and report them to the user. Judgment notifications include: Resultant displayed as shown below (segmed) and background color. When the Voltage value [high] Resistance value [only] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT, Resistance value [high] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT. If the judgment result is FAULT/HOLD or FAIL, the audio tone is accompanied by a red highlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (parity judgment). Settable settings: 20 tables	Comparing measured values with set threshold values to make judgments and report them to the user. Judgment notifications include: Resultant displayed as shown below (segmed) and background color. When the Voltage value [high] Resistance value [only] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT, Resistance value [high] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT. If the judgment result is FAULT/HOLD or FAIL, the audio tone is accompanied by a red highlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (parity judgment). Settable settings: 20 tables	Comparing measured values with set threshold values to make judgments and report them to the user. Judgment notifications include: Resultant displayed as shown below (segmed) and background color. When the Voltage value [high] Resistance value [only] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT, Resistance value [high] FAULT, Resistance value [medium] FAULT, Resistance value [low] FAULT. If the judgment result is FAULT/HOLD or FAIL, the audio tone is accompanied by a red highlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (parity judgment). Settable settings: 20 tables
Measurement Navigator	1. Measurement data: Data can be saved, loaded, and deleted by operating the instrument. 2. Date and time: 3. Resistance value, voltage value, and temperature 4. Comparator threshold value and judgment result	1. Measurement data: Data can be saved, loaded, and deleted by operating the instrument. 2. Date and time: 3. Resistance value, voltage value, and temperature 4. Comparator threshold value and judgment result	1. Measurement data: Data can be saved, loaded, and deleted by operating the instrument. 2. Date and time: 3. Resistance value, voltage value, and temperature 4. Comparator threshold value and judgment result
Communication interface	USB Bluetooth® wireless communications (when Z3210 installed)	USB Bluetooth® wireless communications (when Z3210 installed)	USB Bluetooth® wireless communications (when Z3210 installed)
Other functions	Temperature measurement (-60.0 to 60.0°C), Zero adjustment, Hold, Auto-Hold, Auto-measure, Auto-power-off, Clock	Temperature measurement (-60.0 to 60.0°C), Zero adjustment, Hold, Auto-Hold, Auto-measure, Auto-power-off, Clock	Temperature measurement (-60.0 to 60.0°C), Zero adjustment, Hold, Auto-Hold, Auto-measure, Auto-power-off, Clock
Power supply	LR6 (size AA) alkaline battery × 8 Rated supply voltage: 1.5 V DC × 8	LR6 (size AA) alkaline battery × 8 Rated supply voltage: 1.5 V DC × 8	LR6 (size AA) alkaline battery × 8 Rated supply voltage: 1.5 V DC × 8
Dimensions and mass	269 mm (10.5 in)W × 132 mm (5.2 in)H × 60.4 mm (2.4 in)D (with probe), 340 g (3.9 oz) (excluding battery and probe)	269 mm (10.5 in)W × 132 mm (5.2 in)H × 60.4 mm (2.4 in)D (with probe), 340 g (3.9 oz) (excluding battery and probe)	269 mm (10.5 in)W × 132 mm (5.2 in)H × 60.4 mm (2.4 in)D (with probe), 340 g (3.9 oz) (excluding battery and probe)
Included accessories	Carrying Case C1014 × 1, Protector 2.941 × 1, Base Set 2.5050 × 1, Ad-B Board × 1, Neck strap × 1, USB cable × 1, Application software CD (GENNECT One) × 1, AA alkaline battery (LR6) × 8, User Manual × 1	Instrument only With Pin Type Lead 9465-10 With Pin Type Lead L2020	Instrument only With Pin Type Lead 9465-10 With Pin Type Lead L2020

About probe length

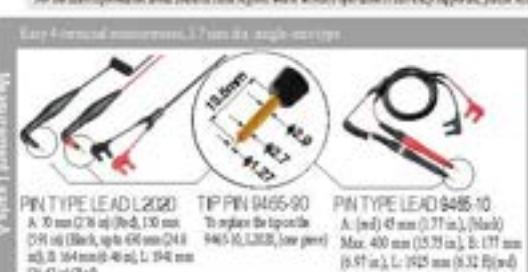

Super Megohm Testers (High Resistance Meters)

Test System Ideal for MLCC Leakage Current Measurement

SUPER MΩ HiTESTER SM7810



- Test the leakage current of MLCCs at the fastest speed of 6.8ms simultaneously over 8 channels
- Conduct high-speed leakage current testing of large-capacity MLCCs in the high current range (1mA)
- Improve testing reliability using the contact check function
- Build a flexible system by making best use of the individual settings of each channel

Model No. (Order Code) SM7810 (100/110V AC power supply)
SM7810-20 (230V AC power supply)

The Super MΩ HiTESTER SM7810 is produced to order. An input/output terminal connection cable* is required separately. Please contact your local HIOKI representative.

* Input/output terminal connector plug and connection cable

• Current input terminal connector and voltage input terminal plug are not included. Voltage input terminal connector is included.

• Input/output terminal connection cables are available in various lengths to suit I/O/D/I measurement systems. Please consult with your HIOKI representative.

■ Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	8 channels (parallel and simultaneous measurement)
Applied voltage	Supply voltage from external power source (voltage input terminal on the rear panel)
Measurement range	Current: 1 pA to 1 mA, Ranges: 100 fA / 1 nA / 10 nA / 100 nA / 1 μA / 10 μA / 100 μA / 1 mA Resistance: 1 × 10 ⁹ Ω to 1 × 10 ¹² Ω
Measurement speed	FAST: 6.8 ms, MED: 26.0 ms, SLOW: 100.0 ms, SLOW2: 320.0 ms
Index type/time	
Basic measurement accuracy	Current accuracy: ±(2.0+0.5 μA / (Measured current value)) % Resistance accuracy: Current accuracy + Voltage generation accuracy of external power supply
Testing voltage setting	0.1 V to 1000.0 V (Resolution: 0.1 V)
Contact check	Judges the contact state by comparing the measured capacitance to a reference value
Other functions	Trigger delay, averaging, contact check, jig capacity open correction, Measured value comparison and judgment, jig resistance open correction functions
Interfaces	GP-IB, RS-232C, EXT I/O
Power supply	SM7810: AC 100/110V, 50/60 Hz, 30 VA SM7810-20: AC 220V, 50/60 Hz, 30 VA
Dimensions and mass	425 mm (16.7 in) W × 99 mm (3.9 in) H × 488 mm (19.2 in) D, 10.5 kg (23.4 lb)
Included accessories	Power cord <1, Instruction manual <1, Voltage input connector L2220 <1, Spare fuse (built into socket) <1, Rubber feet <4

MEASURING LEAD (RED) 00A00019 1 m (3.28 ft) length
MEASURING LEAD (RED) 00A00021 1 m (3.28 ft) length
MEASURING LEAD (RED) 00A00027 5 m (16.4 ft) length

RS-232C CABLE 9037
For the PC, 9-pin, 9-pins, 1.8 m (5 ft) length
GP-IB CONNECTOR CABLE 951-02
1 m (3.28 ft) length

CONNECTOR L2220
Voltage input connector for SM7810

The Power Source Unit Ideal for MLCC Leakage Current Measurement

POWER SOURCE UNIT SM7860 series



Model No. (Order Code) SM7860-51, SM7860-52, SM7860-53, SM7860-54, (100V AC power supply)
SM7860-55, SM7860-56, SM7860-57, SM7860-58
SM7860-61, SM7860-62, SM7860-63, SM7860-64, (230V AC power supply)
SM7860-65, SM7860-66, SM7860-67, SM7860-68 (Power supply)

The Power Source Unit SM7860 is produced to order. An input/output terminal connection cable* is required separately. Please contact your local HIOKI representative, or if you need to use a power supply voltage other than 100VAC or 230VAC.

* Output terminal cable

• Voltage output terminal connection cables are available in various lengths to suit I/O/D/I measurement systems. Please consult with your HIOKI representative.

- Support for multi-channel systems up to 32-channel output
- 8-channels or 16-channels dual-line output voltage setting
- Positive and negative polarities required for the MLCC test line included in a single unit
- Output ON/OFF and current limitation can be performed for each channel
- Support for the discharge of the charge capacitor
- Output voltage of 1 kV is available
- Large current output of 50 mA* /channel allows for reducing the number of backup charges

* Output voltage of 1 kV is limited to 10 mA/channel

■ Basic specifications (Accuracy guaranteed for 1 year)

Supported device	Super MΩ HiTester SM7810 Object to which voltage is applied: MLCC (the Multi-layer Ceramic Capacitor)
Generation accuracy	Output voltage accuracy: ±2% of set value ± 0.1 V (with no load) Inter-channel error: ± 0.01 V or less (between outputs on the same line with no load)
Interfaces	GP-IB, RS-232C, EXT I/O
Power supply	SM7860-51 to -58: 100V AC, SM7860-61 to -68: 220V AC, 50/60 Hz, 860 VA
Dimensions and mass	425 mm (16.7 in) W × 249 mm (9.8 in) H × 581 mm (22.87 in) D, 47 kg (105.9 oz) (SM7860-57 / -67) : 34 kg (74.9 oz)
Included accessories	Power cable <1, Instruction manual <1, Operating precautions <1

CONNECTOR L2221
Voltage output connector for SM7860

SM7860 Functions & output channel configuration

Model No.	SM7860-51 SM7860-61	SM7860-52 SM7860-62	SM7860-53 SM7860-63	SM7860-54 SM7860-64	SM7860-55 SM7860-65	SM7860-56 SM7860-66	SM7860-57 SM7860-67	SM7860-58 SM7860-68
OUT1 to 4 output content	OUT1 OUT2 OUT3 OUT4	+500V +500V +1kV +1kV	+500V +500V +1kV +1kV	+500V +500V -1kV -1kV	+1kV +1kV -500V -500V	+500V +500V -1kV -1kV	+1kV +1kV -1kV -1kV	+10V +10V +500V +500V
Overview (Total number of channels and output voltage)	32ch + 500V	32ch + 1000V	32ch ± 500V	32ch ± 1000V	32ch ± 500V, discharge	32ch ± 1000V, discharge	32ch + 10V, discharge	32ch + 500V, discharge
Line A	Number of OUT1 channels OUT1 output voltage range**	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V
Line B	Number of OUT2 channels OUT2 output voltage range**	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V
Line C	Number of OUT3 channels OUT3 output voltage range**	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V
Line D	Number of OUT4 channels OUT4 output voltage range**	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V	8 ch +1.0V to +1000.0V	8 ch +1.0V to +500.0V
Current limitation	±50 mA/Δt/h	±10 mA/Δt/h	±50 mA/Δt/h	±50 mA/Δt/h				
Maximum output current**	430 mA (200 VA)	300 mA (300 VA)	430 mA (200 VA)	160 mA (100 VA)	430 mA (200 VA)	160 mA (100 VA)	430 mA (4 VA)	430 mA (200 VA)

*1 SM7860-51 to -58: Power supply 100V AC, SM7860-61 to -68: Power supply 230V AC *2 The resolution of the output voltage range is 0.1 V.

*3 Only when the operating conditions as stated in the restriction warnings of the specifications are met.

Super Megohm Testers (High Resistance Meters)

4ch Micro Current Model /Perfect for Automated-Systems Integration

SUPER MEGOHM METER SM7420



- 300 times better noise resistance
- 6000 ps/min - Ideal for mass production
- Channel-independent low capacity contact check
- Perfect for equipping on automated machines
- Max. $2 \times 10^{10} \Omega$ display
- Min. 0.1 fA resolution
- Built-in EXT I/O, RS-232C, GP-IB and USB
- Ideal for mounting in automated lines, easy to construct MLCC leakage current inspection lines

Model No. (Order Code) SM7420 (4ch, Dedicated micro-current measurement)

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately.

■ Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	4ch
DC current measurement	20 pA range (0.1 fA resolution), Accuracy: $\pm(0.0\% \text{ of reading} + 30 \text{ dg})$ 200 pA range (1.0 fA resolution), Accuracy: $\pm(0.0\% \text{ of reading} + 30 \text{ dg})$ 2 nA range (10 fA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 20 \text{ dg})$ 20 nA range (100 fA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ 200 nA range (1 pA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 30 \text{ dg})$ 2 pA range (10 pA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ 200 pA range (100 pA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ 2000 pA range (1 nA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ *2 mA range (1 mA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 30 \text{ dg})$ (1) Measurement speed: 3L/OW2 (internal integration time 12PLC) (2) At a temperature of 23 °C ± 5 °C with humidity of 85% rh (3) 2 mA range (Measurement speed FAST only)
Resistance measurement capabilities	50Ω to $2 \times 10^{10} \Omega$ Note: Resistance measurement accuracy is defined by the current range accuracy and voltage setting accuracy
Measurement time setting	Delay: 0 to 9,999 msec
Functions	CH independent low capacity contact checks, CH independent cable length correction, CH independent μg capacity open compensation, comparator
Display	LCD (8 lines of 30 character), with backlight, high voltage warning indicator
Interfaces	USB, RS-232C, GP-IB, EXT I/O (NPNP/PNP can be switched)
Power supply	100 to 240V AC, 50/60Hz, 45 VA
Dimensions and mass	330 mm (12.99 in)W × 30 mm (1.15 in)H × 450 mm (17.72 in)D, 6.5 kg (22.93 oz)
Included accessories	Power cord >1, Instruction manual >1, CD-R (Communications command instruction manual, USB driver) >1, EXT I/O male connector >1

Min. 6.4 ms Measurement of Super Megohm or Very Small Current

SUPER MEGOHM METER SM7110, SM7120



- 300 times better noise resistance
- Max. 2000 V output : SM7120
- Max. 1000 V output : SM7110
- Max. $2 \times 10^{19} \Omega$ display
- Min. 0.1 fA resolution
- Built-in EXT I/O, RS-232C, GP-IB and USB
- Flexible, Multipurpose Design, High Resistance Meter/Electrometer/ Picoammeter/IR Meter
- Measure resistance of materials by combining with optional electrode

Model No. (Order Code) SM7110 (3 ch, 1000 V)
SM7120 (3 ch, 2000 V)

Note: Measurement leads are not included. Purchase the appropriate lead option for your application separately.

■ Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	1 ch
DC current measurement	20 pA range (0.1 fA resolution), Accuracy: $\pm(0.0\% \text{ of reading} + 30 \text{ dg})$ 200 pA range (1.0 fA resolution), Accuracy: $\pm(0.0\% \text{ of reading} + 30 \text{ dg})$ 2 nA range (10 fA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 20 \text{ dg})$ 20 nA range (100 fA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ 200 nA range (1 pA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 30 \text{ dg})$ 2 pA range (10 pA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ 200 pA range (100 pA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 10 \text{ dg})$ 2000 pA range (1 nA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 30 \text{ dg})$ *2 mA range (1 mA resolution), Accuracy: $\pm(0.5\% \text{ of reading} + 30 \text{ dg})$ (1) Measurement speed: 3L/OW2 (internal integration time 12PLC) (2) At a temperature of 23 °C ± 5 °C with humidity of 85% rh (3) 2 mA range (Measurement speed FAST only)
Resistance measurement capabilities	$1 \times 10^3 \Omega$ to $2 \times 10^{10} \Omega$ Note: Resistance measurement accuracy is defined by the current range accuracy and voltage setting accuracy
Setting voltage range (Accuracy)	0.1 to 1000 V, 100 mV resolution, Accuracy: $\pm 0.1\%$ of setting ± 0.03% fs. [SM7120 only] 1000 to 2000 V, 1 V resolution, Accuracy: $\pm 0.1\%$ of setting ± 0.03% fs.
Current Limiter	0.1 to 2500 V: 5/10/50 mA, 250 to 1000 V: 5/10 mA, to 2000 V: 1.8 mA
Measurement time setting	Delay: 0 to 9,999 msec
Functions	Comparator, averaging, self-calibration, μg Capacity open correction, table length correction, surface resistivity, volume resistivity, voltage monitor, contact check
Program function	10 types of discharge, charge, measure and measurement sequence discharge patterns can be programmed.
Display	LCD (8 lines of 30 character), with backlight, High voltage warning indicator
Interfaces	USB, RS-232C, GP-IB, EXT I/O (NPNP/PNP can be switched)
Power supply	100 to 240V AC, 50/60Hz, 45 VA
Dimensions and mass	330 mm (12.99 in)W × 30 mm (1.15 in)H × 450 mm (17.72 in)D, 5.9 kg (20.81 oz)
Included accessories	Power cord >1, Instruction manual >1, CD-R (Communications command instruction manual, USB driver) >1, EXT I/O male connector >1, Short plug >1

Shared options with the SUPER MEGOHM METER SM7110, SM7120 and SM7420

PIN TYPE LEAD (RED) L2230 1 m (3.28 ft) length	CLIP TYPE LEAD (RED) L2232 1 m (3.28 ft) length	OPEN LEAD (RED) L2234 3 m (9.84 ft) length	PIN TYPE LEAD (BLACK) L2231 1 m (3.28 ft) length	CLIP TYPE LEAD (BLACK) L2233 1 m (3.28 ft) length	OPEN LEAD (BLACK) L2235 3 m (9.84 ft) length	HUMIDITY SENSOR Z2011 1.5 m (4.92 ft) cord length
RS-232C CABLE 9837 For PC, 9pin - 9pin, 1m (3.28 ft) length	GP-IB CONNECTOR CABLE 9751-02 2m (6.56 ft) length	Other CONVERSION ADAPTER 25010 (option extra product) Conversion between electrode / shielding box and Z2011 (or SM7120)				

Super Megohm Testers (High Resistance Meters)

When connecting electrode and shield box to SM7110G/MT120, note that CONVERSION ADAPTER 25000 (option order product) or a change of connectors is required. Please contact your local HIOKI distributor for assistance.

Options for Super megohm meters (for surface resistance or volume resistance measurement)

SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001




Not CE Marked

- Electrodes compliant with the JIS C 2170 and IEC 61340-2-3 standards
- Measurement voltage up to 1000 V, and measurement resistance up to $10^{15} \Omega$
- Surface and volume resistance of sheets and films can be measured just as they are without the need to cut samples
- Measure the surface resistance of antistatic flooring and molded products

*When used with the SM-8200 series (discontinued), measurement can take full advantage of the instrument's voltage and resistance range.

Model No. (Order Code) **SM9001**
SM9002

Dimensions: ø 100mm (3.94in) x 22mm (0.7in); Mass: 2.5kg (5.5lb)
Cable length: 1m (3.28ft)

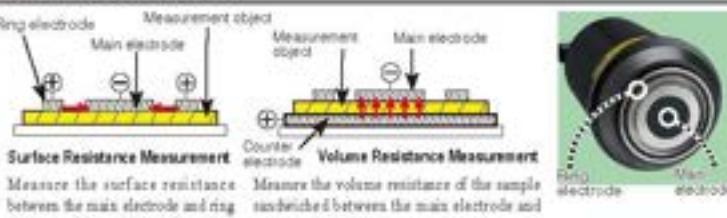

VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT SM9002

The SM9002 Verification Fixture for Surface Resistance Measurement (option) allows you to check the operation of the electrode to increase the reliability of measurement results.

Not CE Marked



Electrode for surface resistance SME-8301



Not CE Marked

Surface resistance can be easily measured by simply pushing the electrode against the specimen. It measures surface resistance of anti-static related goods in combination of mainly Model SM-8213 (discontinued). Measure resistance up to $10^{11} \Omega$.

Dimensions: ø 40mm (1.57in) x 50mm (1.97in)
Lead length: 1m (3.28ft)

Model No. (Order Code) **SME-8301**

Electrode for plate samples SME-8310



Not CE Marked

Sample of 100 mm (3.94 in) square by up to 8 mm (0.31 in) in thickness is measurable. The main electrode dia. is 50 mm (1.97 in) and inner & outer dia. of ring electrode are 70 mm (2.76 in) & 80 mm (3.15 in) respectively. Measurement voltage becomes "OFF" while the lid is open to ensure safety. A selector switch allows selection of voltage or surface resistivity.

*A separately purchased interlock cable (DSM8104P) is required in order to use the product with the SM7110G/SM7120, and DSM-8104.

Model No. (Order Code) **SME-8310**

Dimensions: 215mm (8.46in) W x 78mm (3.07in)H x 155mm (6.09in)D
Lead length: 75cm (2.46ft)

Weight electrode SME-8320



Not CE Marked

This is an electrode for plate sample for use together with SME-8350 shield box. This electrode enables extremely easy measurement of surface resistivity and volume of sample with coarse surface such as carpets, etc. The main electrode dia. is 50 mm (1.97 in), and the ring electrode inner-dia. and outer-dia. are 70 mm (2.76 in) and 80 mm (3.15 in) respectively.

Model No. (Order Code) **SME-8320**

Note: Included: Banana plug x 2

Shield box SME-8350



Not CE Marked

This is used as a sample accommodation box during measurement of a high-insulation resistance samples, or inductive or capacitive samples to perform electromagnetic shielding. When used in combination with mass electrode SME-8320, the electrode can be used as a counter electrode or a guard electrode. When measuring electronic components such as capacitors and transducers, external noise and leakage currents are prevented to ensure stable measurement.

*A separately purchased interlock cable (DSM8104P) is required in order to use the product with the SM7110G/SM7120, and DSM-8104.

Model No. (Order Code) **SME-8350**

Note: Includes rubber sheet

Standard resistor box SR-2



Not CE Marked

This is a resistor box for calibration of the super megohmmeters.

Max. voltage is 1000 V DC and resistor value covers from 1 M to 10000 MΩ in 24 points.

Model No. (Order Code) **SR-2**

Note: Includes inspection data sheet

Dimensions: 270mm (10.63in) W x 90mm (3.54in)H x 195mm (7.68in)D

Electrode for surface resistance SME-8302



Not CE Marked

Electrode for surface resistance of curved samples such as resin and rubber processed goods, TV cathode tubes or small samples. Surface resistance can be measured by pressing the rubber tips at the tip onto the sample. Measure electrodes up to $10^{11} \Omega$ at 10 mm (0.39 in) intervals or greater.

Model No. (Order Code) **SME-8302**

Electrode for plates SME-8311



Not CE Marked

Sample of 40 to 100 mm (1.57 to 3.94 in) square by up to 8 mm (0.31 in) in thickness is measurable. The main electrode dia. is 19.6 mm (0.77 in) and inner & outer dia. of ring electrode are 24.1 mm (0.95 in) & 28.8 mm (1.13 in) respectively. Measurement voltage becomes "OFF" while the lid is open to ensure safety.

The fundamental specifications are the same as SME-8310.

*A separately purchased interlock cable (DSM8104P) is required in order to use the product with the SM7110G/SM7120, and DSM-8104.

Model No. (Order Code) **SME-8311**

Electrode for liquid samples SME-8330



Not CE Marked

Electrode for liquid samples which is electrically guarded. Total volume is 25 ml. Capacitance between main and counter electrode is approx. 45 pF. Electrode constant is approx. 500 cm (16.41 ft). Distance between both electrodes is 1 mm (0.04 in). Outer dia. is 36 mm (1.42 in), height is approx. 140 mm (5.51 in). Measure resistance up to $10^{10} \Omega$ (at 1000 V) when used together with Model SM-8220. Electrodes compliant with the JIS C 2101 standard.

Included: Connection cable 60cm (1.97ft) length (Red) 10A0102 x 1 (Black) 10A0103 x 1

Dimensions: ø 36mm (1.42in) x 140mm (5.51in)

Model No. (Order Code) **SME-8330**

Note: Includes inspection data sheet

Electrode for chip capacitor SME-8360



Not CE Marked

For measuring the resistance of tip capacitors, with adjustable jig from 0 to 11 mm (0 to 0.43 in). When connected to the meter by an interlock cable, measurement voltage becomes "OFF" while the lid is open to ensure safety.

The interlock cable must be modified in order to use the product with the SM-8220 series.

Dimensions: 200mm (7.87in) W x 52mm (2.05in)H x 155mm (5.98in)D
Lead length: 15cm (5.91in)

Model No. (Order Code) **SME-8360**

7-1/2 Digit DC Voltmeter for R&D to Production Lines

PRECISION DC VOLTMETER DM7276, DM7275



LAN

USB

GP-IB

RS-232C

CE

3 years
Warranty

- High-accuracy model with 1-year 9ppm Accuracy: DM7276
- Basic model with 1-year 20ppm Accuracy: DM7275
- Capacitance contact check (using built-in C-monitor)
- Supports global production with built-in variable power supply
- Built-in EXT I/O, LAN, and USB




Model No. (Order Code) DM7275-01

- DM7275-02 (Built-in GP-IB)
 DM7275-03 (Built-in RS-232C)
- DM7276-01
 DM7276-02 (Built-in GP-IB)
 DM7276-03 (Built-in RS-232C)

Note: Measurement probes are not included. Purchase the probes appropriate for your application separately.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DM7275	DM7276
DC Voltage	300 mV (+120,000.00 mV) to 1000 V (+40,000,000.0 V), 5 ranges	
Basic accuracy	10 V range: $\pm 0.002\% \text{rdg} \pm 12 \mu\text{V}$ 100 V range: $\pm 0.0009\% \text{rdg} \pm 12 \mu\text{V}$	10 V range: $\pm 0.0009\% \text{rdg} \pm 12 \mu\text{V}$
Temperature	-10.0°C to 60.0°C (14.0°F to 140°F); combined with sensor Z2001: 10.5°C (50°F to 30°C)	
Integration time	Integration time unit: PLC (PLC setting: 0.02, 0.2, 1, 10, 100, ms setting: 1, max: 3000 ms)	
Measurement support functions	Smoothing function, null, temperature compensation, scaling, over-range display, self-calibration, auto-hold, contact check	
Management support functions	Computer, RIN, absolute value judgment, label display, statistics, measurement information, communication monitor, EXT I/O TEST	
Contact check	Check signal: 10 mV rms, threshold value: 0.5 nF to 50 nF (Contact time is the 100 V/1000 V range). Contact check integration time: 1 ms to 100 ms	
Interfaces	Standard: LAN (100BASE-TX), EXT. I/O, USB (flash drive / U35 device (USB1.1 Full-Speed)) Optional: GP-IB (42-type only) / RS-232C (40-type only) / TR-DTTER (40-type only)	
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA	
Dimensions and mass	235 mm (8.46 in) W × 88 mm (3.46 in) H × 232 mm (9.13 in) D (-00 type): 2.3 kg (5.11 lb), (-02/-03 type): 2.4 kg (5.47 oz)	
Included accessories	Instruction manual x1, power cord x1, application disk (CD-R) x1	



option for Test Leads



option for PC communication



Introducing a New Digital, Multi-module DMM (Digital-Multi-Module) Station

DMM STATION MR8990+MR8741, MR8740

DIGITAL VOLTMETER UNIT
MR8990

USB

LAN

CE

3 years
Warranty

- Model No. (Order Code) MR8990 (For the MR8990, MR8741, MR8740, MR8740T, and similar products)
 MR8740 (Max. 54 ch, 86.0M/s memory, main unit only)
 MR8741 (Max. 16 ch, 250M/s memory, main unit only)

■ DVM Unit MR8990 Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	Install into Memory HiCorder MR8990/MR8741A/MR8827, MR8847B/MR8740T for use 2 channels of DC voltage measurement
Measurement ranges (20 div./s)	100 mV range (5 mV/div.) : -120,000 mV to 120,000 mV, 0.1 μV resolution 10 500V range (50 mV/div.) : -500,000 V to 500,000 V, 1 mV resolution, 5 ranges
Measurement accuracy	Basic accuracy: $\pm 0.01\% \text{rdg} \pm 0.0025\% \text{Ex.}$
Max. allowable input	500 V DC (upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	300 V AC/DC (input and instrument are isolated; upper limit voltage that can be applied between input channels or between input channels and chassis without damage)
Max. sampling rate	2 kHz (500 samples/s)


■ DVM Unit UB991 Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	Install into Memory HiCorder MR8740T for use 4 channels of DC voltage measurement
Measurement ranges	1 V fs. range: -1,000,000 V to 1,000,000 V, 1 μV resolution, to 100 V fs. range: -100,000 V to 100,000 V, 100 μV resolution, 3 ranges
Measurement accuracy	Basic accuracy: $\pm 0.02\% \text{rdg} \pm 0.002\% \text{Ex.}$
Max. allowable input	100 V DC (upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	100 V AC/DC (input and instrument are isolated; upper limit voltage that can be applied between input channels or between input channels and chassis without damage)
Max. sampling rate	20 ms (50 samples/s)

Note: It can not be used with the Digital Voltmeter Unit alone. Memory HiCorder body is required. Moreover, input code is not attached.

Other options refer to the detailed catalog.

DMM STATION U8991+MR8740T

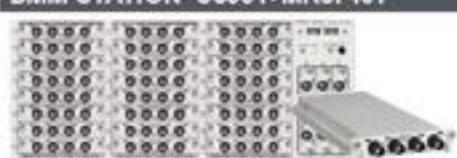

USB

LAN

CE

3 years
Warranty

- Install in a Memory HiCorder to measure DC voltage with high accuracy and high resolution
- High-precision measurement for applications such as investigating minute voltage fluctuations in sensor output
- The MR8740T is packed with 27 units of U8991 and stores 108ch data at once
- Unlike standard multi-channel scan-type loggers, these instruments can perform simultaneous sampling

Model No. (Order Code) U8991 (For the MR8740-50)

MR8740-50 (Max. 108ch, 10M/s memory, main unit only)

Signal Generators

Output the signal the recorder measured, which is ideal for abnormality simulation test

ARBITRARY WAVEFORM GENERATOR UNIT U8793



- Output arbitrary waveform signals up to 2 channels
- Output problematic waveforms recorded with the Memory HiCorder up to 15 V
- Output customized arbitrary waveforms signals up to 15 V
- For use with Hioki Memory HiCorder series (cannot use with 8847 or MR8847)
- Built-in function generator and sweep function
- Isolated between unit and output, and between all channels

Model No. (Order Code) **U8793**

(For the MR8847A and similar products)

Note: This module must be used with the Memory HiCorder. Output cords are not included. Please purchase them separately.

Related products

For options, please see the product catalog.

WAVEFORM GENERATOR UNIT MR8790



- Output sine waves (20 kHz max.) and DC voltage signals up to 4 channels per unit
- Output signals up to 10V or less
- For use with Hioki Memory HiCorder series (cannot use with 8847 or MR8847-01/-02/-03)
- Isolated between unit and output, and between all channels

Model No. (Order Code) **MR8790**

PULSE GENERATOR UNIT MR8791



- Output pulse waves, pattern waves up to 8 channels per unit (output signals of TTL level or open-collector)
- For use with Hioki Memory HiCorder series (cannot use with 8847 or MR8847-01/-02/-03)
- Isolated between unit and output (not isolated between each channel (common ground))

Model No. (Order Code) **MR8791**

VIR GENERATOR UNIT U8794



- When used as an EDU testing device, generate simulated signals from various sensors, which is indispensable for testing electronic parts and maintaining equipment
- 8 ch. DC Voltage, DC current, resistance (simulated output)
- For use with Hioki Memory HiCorder MR8790T (MR8740-50) (cannot use with MR8740 or MR8741)
- Isolated between unit and output, and between all channels

Model No. (Order Code) **U8794** (Note: For the MR8740-50)

Generate and Measure Signals Simultaneously

DC SIGNAL SOURCE SS7012



Communication only



- Improve stability and reduce calibration costs compared with the previous HIOKI model
- For instrumentation systems (4 - 20 mA) and loop testing
- Check temperature control equipment and electric distribution
- 8 types of thermocouples to test thermoelectric power generation
- Ideal for electrical device evaluating and routine maintenance of production equipment such as calibrators
- Use the max. 25 mA DC sink as an electric load

Model No. (Order Code) **SS7012**

Note: Use of the AC Adapter and/or rechargeable batteries and dedicated charger is recommended.

■ Basic specifications (Accuracy guaranteed for 1 year)

[Generation functions]

Circuit method	Bipolar sink and source
Constant Voltage	2.5 V: 0 to $\pm 2,500$ V ($\pm 0.03\%$ of setting $\pm 300 \mu$ V, 100μ V resolution) 25 V: 0 to $\pm 25,000$ V ($\pm 0.03\%$ of setting $\pm 3 \mu$ V, 1μ V resolution)
Constant Current	25 mA: 0 to $\pm 25,000$ mA ($\pm 0.03\%$ of setting $\pm 3 \mu$ A, 1μ A resolution)
Thermoelectric power generation	E: to TC: 0 °C, -174.0 to 172.0 °C ($\pm 0.05\%$ of setting ± 0.5 °C, 0.1 °C resolution). Other types: E, J, T, R, S, B, N selectable
Thermoelectric power generation	E: to TC: RJ, -174.0 to 172.0 °C ($\pm 0.05\%$ of setting ± 0.5 °C, 0.1 °C resolution). Other types: E, J, T, R, S, B, N selectable
Standard resistance (R _{th})	100 Ω (± 0.2 Ω)
Automatic generation	Number of memory steps: 20, Interval time: 1 to 99 sec (at CV, CC, TC mode)

[Measurement functions]

Voltage	2.5 V: 0 to $\pm 2,500$ V ($\pm 0.03\%$ of setting $\pm 300 \mu$ V, 100μ V resolution), 1 MΩ input resistance 25 V: 0 to $\pm 25,000$ V ($\pm 0.03\%$ of setting $\pm 3 \mu$ V, 1μ V resolution), 1 MΩ input resistance
Current	25 mA: 0 to $\pm 25,000$ mA ($\pm 0.03\%$ of setting $\pm 3 \mu$ A, 1μ A resolution), 25 Ω input resistance
Temperature	-25.0 to 80.0 °C (± 0.5 °C at 23 ± 5 °C, 0.1 °C resolution, use with the RJ sensor VS84)
Sampling rate	Approx. 1.67 times/sec
Additional functions	Zero adjustment, Overflow display, USB communication, Monitor
Power supply	AC adapter 9445-02/-03 (100 to 240 V AC, 50/60 Hz, 9 VA), Ni-MH battery LR6 × 4, 6 VA, (fully charged 2500 mAh Ni-MH batteries, 170 minutes continuous use), or LR6 (AA) alkaline battery × 4, 6 VA
Dimensions and mass	104 mm (4.09 in)W × 180 mm (7.09 in)H × 58 mm (2.28 in)D, 660 g (23.3 oz) (including LR6 × 4 batteries)
Included accessories	Input cord 9688-1, Test lead L9170-10 × 1, Fuse × 1, LR6 (AA) alkaline battery × 4, Instruction manual × 1

Standard accessories



INPUT CORD 9688
70 cm (27.6 in) length



TEST LEAD
L9170-10
70 cm (27.6 in) length

Options

Commercially available rechargeable batteries (AA, AAA, MN, MNV batteries) +B may also be used to power the SS7012. Using locally purchased rechargeable batteries and dedicated battery chargers is recommended; however, SS7012 will not be able to guarantee operating time as different rechargeable batteries exhibit different power specifications per charge. The SS7012 cannot be used to recharge batteries.



COMMUNICATION
PACKAGE SS8000
USB cable, USB driver
software included



CARRYING CASE
9762
Includes compartment
for options, Hand type



AC ADAPTER
9445-02
100 to 240 V AC



CARRYING CASE 9880
Fitting to machine
body only type



TEMPERATURE
PROBE 9784
Furnace probe
constant

Safety Testing

Diagnose the Insulation Quality and Deterioration of Rotor Windings while in Assembled State via Response Waveform Quantification

IMPULSE WINDING TESTER ST4030A



- Identify previously undetectable defects
- Detect waveforms with high precision (200 MHz high speed sampling × high 12-bit resolution)
- Identify single-fault turns via quantification of response waveforms into LC and RC values
- Diagnose defective insulation (pseudo-shorts) between motor windings by testing for microscopic partial discharges hidden in noise (option)

Model no. (Order Code) ST4030A

Note: The Discharge Detection Upgrade ST9000 is a factory option for the Impulse Winding Tester ST4030A. Please specify at time of order.

■ Basic specifications (Accuracy guaranteed for 1 year)



Measurement item	• Quantification (LC value, RC value) of the response waveform obtained when impulse voltage is applied, pass / fail judgment • Waveform judgment using AREA value, Flutter, Laplacian etc. • Equipped with dielectric breakdown voltage test function
Applied voltage	100 V to 4200 V (Setting resolution: 10 V steps) Maximum applied energy: approx. 38 mJ
Testable inductance range	10 μ H to 100 mH
Sampling	200 M / 100 M / 50 M / 20 M / 10 MHz; Resolution: 12 bits, Number of data: 1001 to 300 points (3000 point steps)
Voltage detection accuracy	[DC accuracy] ± 5% of setting, [AC band] 100 kHz: ± 1 dB
Determination method	LC · RC value judgment, waveform judgment, discharge judgment (when incorporating the ST9000)
Number of test condition tables	255 (test condition setting, judgment condition setting, master waveform)
Test time	About 60 ms (3000 V, 1 pulse, reference value at decision OFF)
Display	8.4-inch SVGA color TFT liquid crystal (800 × 600 dots), touch panel
Interface	Standard: EXT I/O, USB host (memory), USB device (communication), LAN Optional: RS-232C (Z3000), GP-IB (Z3000)
Power supply	100 V to 240 V AC, 50/60 Hz, 80 VA max.
Dimensions and mass	215 mm (W) × 200 mm (D) × 348 mm (H) / 6.7 kg (23.3 lb)
Included accessories	Power cord × 1, Instruction Manual × 1, Application disc × 1, Usage notes × 1



Note: Effect of cable parasitic components
Vibration waveform changes according to cable length. For consultation on special order products with cable capacity within a certain range, please contact your HIOKI distributor.



Safety Testing

Protective Ground Tester Indispensable for Standards Certification

AC GROUNDING HITESTER 3157



option

option



■ Basic specifications (Accuracy guaranteed for 1 year)

Basic functions	AC 4-terminal method resistance measurement
Display	Fluorescent tube (digital display)
Current setting range	3.0 A to 30.0 A AC (0.1 A resolution), into 0.1Ω load
Max. output power	130 VA (at output terminals)
Open-terminal voltage	Max. 6 V AC
Generator frequency	50 Hz or 60 Hz; sine wave (selectable)
Resistance measurement	0 to 1,800 Ω (0.001 Ω resolution), Accuracy: ±2% rdg ±4 digit after zero-adjust
Voltage measurement	0 to 6.00 V AC (single range 0.01 V resolution), Accuracy: (1% rdg +5 digit)
Monitor section	0 to 15.0 A AC/0 to 6 V AC, Refresh rate: 2 times/s
Timer display	Counts down time after start until preset time, Shows elapsed time after start
Timer setting	0.5 s to 999 s
Comparator	PA23/FAIL evaluation using preset upper/lower limit, buzzer sound, signal output
Memory function	Max. 20 settings (with save/load)
Interfaces	EXT I/O, EXT SW, GP-IB or RS-232C (optional)
Power supply	100 to 120 V/200 to 240 V AC (switching, 50/60 Hz)
Dimensions and mass	320 mm (12.6 in)W × 90 mm (3.54 in)H × 263 mm (10.35 in)D, 7 kg (246.9 oz)
Included accessories	Power cord × 1, Instruction Manual × 1, Spare fuse (inlet) × 1, Shorting bar × 2

- Easily perform protective continuity testing in compliance with international safety standards and laws
 - Protective continuity resistance measurement for medical devices and general electrical devices
 - Ground connectivity testing when installing electrical machine tools and distribution panels
 - Testing of protective grounding and residential grounding work for medical equipment
 - Evaluation of contact status using large currents
- Feedback control system that is capable of applying a stable current even with a fluctuating load
- Soft-start function that checks the connection to the device under test before applying the current

Model No. (Order Code) 3157-01 (100-120 / 200-240 VAC switching)

Note: This instrument is not capable of performing measurements by itself. Please purchase two Current probe 9296 units or one Current probe 9295 and one Current apply probe 9297, depending on your measurement application.

OPTION	DESCRIPTION	OPTION	DESCRIPTION	OPTION	DESCRIPTION
REMOTE CONTROL BOX (BIVOLGE) 9613	For Start/Stop control, 1.5m (4.92 ft) cord length	REMOTE CONTROL BOX (DUAL) 9614	For Start/Stop control, 1.5m (4.92 ft) cord length	CURRENT PROBE 9296	Alligator clip, 140cm (4.60 ft) length
				CURRENT APPLY PROBE 9297	With switch, 140cm (4.60 ft) length
				SAFETY TEST DATA MANAGEMENT SOFTWARE 9567	For PC control application software
				GP-IB CONNECTOR CABLE 9551-02	2 m (6.56 ft) length
				RS-232C INTERFACE 9510-01	For the 3157-01, built-in type
				GP-IB INTERFACE 951B-02	For the 3157-01, built-in type

Safety Testing

Leak Current Measurement, an Essential Part of Electrical Safety (for medical-use electrical devices)

LEAK CURRENT HiTESTER ST5540



USB 2.0

RS-232C

CE

3-year

- Compliance with IEC 60601-1:2005 Ed 3.0, JIS T 0601-1:2012 for medical-use electrical devices and essential to electrical safety ("Starting on June 1, 2012, medical electrical equipment sold in the EU must comply). Model ST5540 comply with IEC 60601-1:2005+ A1:2012 (Ed 3.1), and IEC 62353 of 2017
- Compliance with Electrical Appliances and Materials Safety Act, JIS, IEC, and UL standards for general-use electrical devices
- Uninterrupted polarity switching function dramatically reduces cycle time
- Support for rated currents up to 20 A gives the instrument more than adequate capability for testing products designed to comply with new standards
- Touch panel features simple, interactive operation
- Communications functionality and external I/O support allow automatic testing on production lines

Model No. (000 000) ST5540 (For medical-use and electrical devices)

Note: Always use an isolation transformer when measuring leak current for medical-use electrical devices. The ST5540 does not include an isolation transformer. When measuring medical-use electrical devices, use a step-up isolation transformer or similar component operating at 2.5% of the rated supply voltage as the power supply for the device under test.

PTFE L2200 (for ST5540, Red >2, Black >1) set and the ST5540 are located

**■ Basic specifications (A cover guaranteed for 1 year)**

Measurement methods	Measurement of voltage drop across body simulated resistance points, Calculation and display of current values, True rms measurement, Measurement unit floats relative to instrument ground.
Measurement modes	Leak current measurement, voltage measurement, safety conductor current measurement
Standards compliance (NW Body simulated resistance)	[NW-A] • Electrical Appliances and Materials Safety Act [NW-B1] • Medical electrical equipment: IEC 60601-1:1993+ A2:1995, JIS T 0601-1:1999 [NW-B2] • Medical electrical equipment: IEC 60601-1:2005+ A1:2012, JIS T 0601-1:2012 and complement I:2014, IEC 62353 [NW-C] <ul style="list-style-type: none">• Measurement of touch current and protective conductor current: IEC 60990:2016• Electrical equipment for measurement, control, and laboratory use: IEC 60060-1:2010+ A1:2016• Information technology equipment: IEC 60950-1:2005+ A1:2009+ A2:2013• Audio, video and similar electronic apparatus: IEC 60065:2014• Personnel Protection Systems for EV: UL 2231-1:2012 (Amended 2016), UL-2231-2:2012 (Amended 2016) [NW-D] • For UL: UL 1492:1996 (Amended 2013) [NW-G] • Electrical equipment for measurement, control, and laboratory use; current measurement circuits in damp conditions: IEC 60010-1:2000+ A1:2016
Leak current measurement	Ground leak current, 3 types of contact current, 7 types of patient leak current, patient measurement current, 4 types of total patient leak current, free current measurement, 3 types of end-once leak current
Measurement current	DC, AC (true rms, 0.1 Hz to 1 MHz), AC+DC (true rms, 0.1 Hz to 1 MHz), AC peak (0.5 Hz to 1 MHz)
Measurement ranges	DC / AC / AC+DC mode: 50.0 mA / 5.000 mA / 500.0 µA / 50.00 µA AC peak mode: 75.0 mA / 10.00 mA / 1.000 mA / 500.0 µA
Measurement accuracy (current measurement)	DC measurement: ±2.0% rdg ±6 digit (typ) AC / AC+DC measurement: ±2.0% rdg ±6 digit (15 Hz to 100 kHz, typ) AC peak measurement: ±2.0% rdg ±6 digit (15 Hz to 10 kHz, typ)
Interfaces	External I/O, medical device relay output, USB 2.1 (communications), RS-232C
Functionality	100% voltage application, automatic test, data storage for 100 target devices, clock, data backup, printed output (optional), etc.
Power supply	100/120/220/240 V AC (specify at time of order), 50/60 Hz, 30 VA rated power
Target device power supply input	100 to 250 V AC, 50/60 Hz. Rated current input from terminal block: 20 A
Target device power supply output	Output from terminal block: 20 A. Output from outlet: 15 A
Dimensions and mass	220 mm (12.60 in)W × 130 mm (4.33 in)H × 250 mm (9.86 in)D, 4.5 kg (9.97 lb)
Included accessories	Test lead L2200 (for ST5540, Red >2, Black >1) :1 set, Enclosure probe 9195 :1, Power cord :3, Spare fuse for measurement line :1, Instruction manual :1, CD-ROM :1

Safety Testing

Leak Current Measurement, an Essential Part of Electrical Safety (for electrical devices)

LEAK CURRENT HiTESTER ST5541



USB

RS-232C

CE

RoHS

- Compliance with Electrical Appliances and Materials Safety Act, JIS/IEC/UL standards
- Uninterrupted polarity switching function dramatically reduces cycle time
- Support for rated currents up to 20 A gives the instrument more than adequate capability for testing products designed to comply with new standards
- Touch panel features simple, interactive operation
- Communications functionality and external I/O support allow automatic testing on production lines

Model No. (Order Code) **ST5541** (For electrical devices)

Note: For applications involving leak current measurement of medical-use electrical devices, use the ST5540.

ST5540, ST5541 shared options



■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement methods	Measurement of voltage drop across body simulated resistance points, Calculation and display of current values, True rms measurement, Measurement unit floats relative to instrument ground.
Measurement modes	Leak current measurement, voltage measurement, safety conductor current measurement
Standards compliance (NW: Body simulated resistance)	[NW-A] • Electrical Appliances and Materials Safety Act [NW-C] • Measurement of touch current and protective conductor current: IEC 60990:2016 • Electrical equipment for measurement, control, and laboratory use: IEC 61040-1:2000+A1:2016 • Information technology equipment: IEC60950-1:2005+A1:2009+A2:2013 • Audio, video and similar electronic apparatus: IEC 60065:2014 • Personnel Protection Systems for EV: UL 2231-1:2012 (Amended 2016), UL-2231-2:2012 (Amended 2013) [NW-D] • For UL: UL 1492:1996 (Amended 2013) [NW-G] • Electrical equipment for measurement, control, and laboratory use; current measurement circuits in damp conditions: IEC 61010-1:2010+A1:2016
Leak current measurement	Ground leak current, 3 types of contact current, free current measurement, 3 types of enclosure leak current
Measurement current	DC, AC (true rms, 15 Hz to 1 MHz), AC+DC (true rms, 15 Hz to 1 MHz), AC peak (15 Hz to 1 MHz)
Measurement ranges	DC / AC / AC+DC mode: 50.00 mA / 5.000 mA / 500.0 µA / 50.00 µA AC peak mode: 75.0 mA / 10.00 mA / 1.000 mA / 500.0 µA
Measurement accuracy (current measurement)	DC measurement: ±2.0% rdg. ±6 digit (typ.) AC / AC+DC measurement: ±2.0% rdg. ±6 digit (15 Hz to 100 kHz, typ.) AC peak measurement: ±2.0% rdg. ±6 digit (15 Hz to 10 kHz, typ.)
Interfaces	External I/O, USB-LI (communications), RS-232C
Functionality	Automatic test, data storage for 100 target devices, clock, data backup, printed output (optional), etc.
Power supply	100/120/220/240 V AC (specify at time of order), 50/60 Hz, 30 VA rated power
Target device power supply input	100 to 250 V AC, 50/60 Hz. Rated current input from terminal block: 20 A
Target device power supply output	Output from terminal block: 20 A. Output from outlet: 15 A
Dimensions and mass	320 mm (12.60 in)W × 110 mm (4.33 in)H × 253 mm (9.96 in)D, 4.5 kg (9.97 oz)
Included accessories	Test lead L2200 (Red ×1, Black ×1) ×1 set, Endlosure probe 9195 ×1, Power cord ×3, Spare fuse for measurement line ×1, Instruction manual ×1, CD-ROM ×1

■ ST5540, ST5541 List of functions

Item	ST5540	ST5541
Network	Network A (Electrical Appliances and Materials Safety Act)	✓
	Network B (Medical-use electrical devices)	✓
	Network C (IEC 60990)	✓
	Network D (UL)	✓
	Network E (General-purpose I)	✓
	Network F (General-purpose II)	✓
	Network G (IEC 61000-1)	✓
Major functions	Power on polarity switching function	✓
	Rated current 20 A	✓
	Function for checking for blown fuses	✓
	Frequency band switching	✓
	100% voltage output terminal (T3 terminal)	✓
	S10, S12, S13, E terminal	✓
		✓

■ ST5540, ST5541 List of functions

Item	ST5540	ST5541
Testing leakage current mode	Earth leakage current	✓
	Touch current	✓
	Patient auxiliary current	✓
	Patient leakage current	✓
	Total patient leakage current	✓
	Free current	✓
	Enclosure - Earth leakage current	✓
	Enclosure - Enclosure leakage current	✓
	Enclosure - Line leakage current	✓
	Patient leakage current I	✓

Safety Testing

Ensure insulation resistance testing in the battery production processes

BATTERY INSULATION TESTER BT5525



- Ideal for battery production lines
- BOD function for detecting minute short-circuits caused by contamination
- Stable insulation resistance testing even in noisy environments
- Contact check function (Prevents errors due to poor contact)
- High cost performance thanks to accessible pricing, high-speed testing, and compact footprint
- Contact check function reduces the number of false negatives caused by equipment issues

Model No. (Order Code) BT5525

Note: The instrument is not able to perform measurement by itself. Please purchase optional test leads separately as appropriate for your measurement application. The LOW terminal is a dedicated HDO/H connector, so only our optional L2131 or L2133 can be connected.



■ Basic specifications (Accuracy guaranteed for 1 year)

Main functions	Insulation resistance test, Break Down Detect (BDD) function, Contact check function
Output specifications	Output voltage: 25 V to 500 V, Setting resolution 1 V Charging current (current limit function): 50 μ A to 50 mA ^{±0.2%} , minimum setting resolution 10 μ A Short-circuit current: 60 mA or less Discharge current: 40 mA or greater
Measurement specifications	Resistance value display range: 0.05 M Ω to 9999 M Ω Resistance range: 2 M Ω , 20 M Ω , 200 M Ω , 2000 M Ω , AUTO
Basic specifications	±1.5% rdg. ±2 digit. 25 V \leq V \leq 100 V [0.05 M Ω to 2 M Ω], 100 V \leq V \leq 500 V [0.2 M Ω to 20 M Ω] Test time: 0.030 s to 999.999 s, OFF
Time specifications	Comparator delay time: 0.001 s to 999.999 s, AUTO Display update speed: 1 PLC Sampling time: 1 PLC to 300 PLC
Memory functions	Pand save function: Saves up to 15 sets of measurement conditions Measured value memory function: Saves up to 999 measured values in the instrument's internal memory
Judgment functions	Test modes: Continuous test, PASS STOP, FAIL STOP UPPER FAIL: Measured value > upper limit value COMPARATOR function: PASS: Upper limit value \geq measured value \geq lower limit value LOWER FAIL: Measured value < lower limit value
Various functions	Break Down Detect function (BDD): Detecting minute insulation defects caused by contamination Contact check function: 2-terminal capacitance measurement method Automatic data output function: Automatic output of measurement results via communication interface after completion of test Comm and native function: Screen display of commands being sent and received External I/O monitor function: Screen display of output signal ON/OFF and input signal status Analog output function: Converts measured values to 0 to 4 V DC and outputs
Interfaces	USB, LAN, RS-232C, EXT. I/O
Power supply	100 V to 240 V AC
Maximum rated power	900 VA
Dimensions and mass	Approx. 215 mm (8.46 in) W × 80 mm (3.15 in) H × 306.5 mm (12.07 in) D (excluding protruding parts), Approx. 2.8 kg (6.16 lb)
Included accessories	Power cord × 1, EXT. I/O male connector × 1, EXT. I/O connector cover × 1, EXT. I/O interlock cancellation jg × 1, Startup Guide × 1

¹ Overheads involving the adjustment generator will result in an increase in measurement time. If a negative load of approx. -20% or greater is connected, the measurement time settings 2.5 s or greater
² After measuring a current limit (approx. 2.5 mA or greater), measurement will be stopped if there is no voltage of at least 20 V for 200 ms after the start of measurement. Measurement will be possible if a short circuit is stopped.
³ If the current limit value is from 1.5 to 10 mA, the current will be limited to 1 mA after the output voltage reaches the set voltage.

Industry's Fastest Testing Speed

INSULATION TESTER ST5520



- Rapidly assess in as fast as 50 ms
- Quick discharge of residual voltage
- Freely configurable test voltage (Set from 25 V to 1000 V, 1 V resolution)
- Contact check function (Prevents errors due to poor contact)
- Short-circuit check function (Stops potential defects from reaching the market)
- Ideal for battery production lines

Model No. (Order Code) ST5520 (Built-in external I/O output)
ST5520-01 (Built-in BCD output)

Note: The ST5520 and ST5520-01 cannot be operated alone. Please select and purchase the optional test leads to accommodate your application.



■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Insulation resistance (Applied DC voltage method)
Testing voltage	(Measurement range: AUTO/MANUAL setting is possible) 25 V \leq V \leq 100 V [2,000/20,000/200 M Ω], 100 V \leq V \leq 500 V [2,000/20,000/2000 M Ω], 500 V \leq V \leq 1000 V [2,000/20,000/4000 M Ω]
Basic accuracy	±2 %rdg. ±5 digit 25 V \leq V \leq 100 V [0 to 20 M Ω], 100 V \leq V \leq 500 V [0 to 20 M Ω], 500 V \leq V \leq 1000 V [0 to 20 M Ω]
Measurement speed	Fast: 30 ms/time, Slow: 500 ms/time (selectable)
Display	LCD (service life: 100,000 hours), 4-level backlight
Internal memory	Saved items: rated measurement voltage, comparator upper limit/lower limit values, test mode, beep sound to distinguish the result, test time, response time, resistance range, measurement speed Memory capacity: up to 10 items (can be user-defined)
Comparator setting	UPPER FAIL: Measured value \geq upper limit value PASS: Upper limit value \geq measured value \geq lower limit value LOWER FAIL: Measured value \leq lower limit value
Judgement process	Beep sound, PASS / U.FAIL / L.FAIL light up on LED display, When UL FAIL, U.FAIL / L.FAIL light up simultaneously, EXT. I/O output, judgement result can be obtained via RS-232C
Test duration	Definition of test duration: Test duration = Response time + Measurement time Function: Set the time from voltage application until pass/fail assessment Configuration range: 0.045 s to 999.999 s (0.001 s resolution)
Response time	After the start of the test, comparator judgement operation can be prohibited until a set interval from 0.005 sec. to 999.999 sec. (at 0.001 sec. resolution) has passed
Analog output	DC 4-16 V E. _s
Interface	RS-232C (standard), External I/O (External control input, Judgment result) BCD output (ST5520-01 only)
Power supply	100 to 240 V AC, 50/60 Hz, 25 VA max.
Dimensions and mass	215 mm (8.46 in) W × 80 mm (3.15 in) H × 166 mm (6.54 in) D, 1.1 kg (2.8 lb)
Included accessories	Instruction Manual × 1, Power cord × 1, EXT. I/O Connector × 1, Connector Cover × 1



Safety Testing

Ensure Insulation and Withstand Voltage with Contact Check

AC AUTOMATIC INSULATION/WITHSTANDING HITESTER 3174



IEC 62270

CE



- Continuous testing of insulation (500/1000 V) and withstand voltage (100 VA transformer capacity)
- Full remote operation when used in combination with the Safety Test Data Management Software 9267
- Save up to 8 test settings each for the withstand and insulation testing modes
- Precise test voltage without power voltage dependency is generated using the PWM method

Model No. (Order Code) 3174

Insulation/Withstanding Voltage [AC]

Note: To perform contact checks, please purchase another High Voltage Test Lead 9615 set separately.

■ Basic specifications (Accuracy guaranteed for 1 year)

[Withstanding test section]

Testing voltage	0.2 V AC to 5.00 kV AC
Voltage setting	Digital setting, Setting resolution: 0.01 kV
Waveform/frequency	Sine wave (Distortion ratio: 5% or less at no load), 50/60 Hz selectable
Current measurement	0.01 mA to 20.0 mA, True RMS rectified (Digital display)
Measurement range	10 mA (0.01 mA resolution), 20 mA (0.1 mA resolution)
Voltage meter	Accuracy: $\pm 1.5\%$ rdg (1000 V acm), 415 V (less than 1000 V), True RMS rectified
Judgment function	Window comparator method (Digital setting)

[Insulation test section]

Testing voltage	500 V DC, 1000 V DC
Unloaded voltage	1 to 1.2 times rated voltage
Rated testing current	1 to 1.2 mA, Shorted current: 4 to 5 mA (at 500 V), 2 to 3 mA (at 1000 V)
Measurement range, Accuracy	0.5 MΩ to 999 MΩ (at 500 V), and 1 MΩ to 999 MΩ (at 1000 V): $\pm 4\%$ rdg, 1000 MΩ to 2000 MΩ: $\pm 8\%$ rdg
Judgment function	Window comparator method (Digital setting)

[Timer section] *Test times may differ from set time or times depending on the load

Setting range	0.3 to 999 s
Ramp, Delay	Testing voltage ramp-up, or down, Insulation test delay: 0.1 to 99.9 s

[General section]

Functions	Saving & testing conditions, hold, buzzer, contact check
Monitor function	Output voltage, detected current, insulation resistance, Refresh rate: 2 times/s
Power supply	100 to 240 V AC, (50/60 Hz), 200 VA max.
Dimensions and mass	320 mm (12.6 in)W × 155 mm (6.1 in)H × 395 mm (15.5 in)D, 15 kg (33 lb)
Included accessories	H.V. Test lead 9615 (high voltage side and return, 1 each) × 1, Power cord × 1, Instruction manual × 1, Disconnection prevention plate × 1



H.V. TEST LEAD 9615
Red, black each 1.5 m
(4.92 ft) length



REMOTE CONTROL BOX (SINGLE) 9613
For Start/Stop control, 1.5 m (4.92 ft) cord length

REMOTE CONTROL BOX (DUAL) 9614
For Start/Stop control, 1.5 m (4.92 ft) cord length



SAFETY TEST DATA
MANAGEMENT
SOFTWARE 9267
For PC control application
software



RS-232C-CABLE 9637
For the PC, Serial Port,串行端口, 1.8 m
(5.9 ft) length

Safety Testing

All-in-one Model that Combines Withstand Voltage and Insulation Resistance (AC/DC)

AUTOMATIC INSULATION / WITHSTANDING HITESTER 3153



GP-IB

RS-232C

CE

3-year
Warranty

- Programmable insulation (50 to 1200 V DC) and dielectric strength (AC/DC) testing
- Program up to 32 files of test types, test points (50 steps), and measurement settings
- Optional scanner for multipoint automatic testing
- Uses the PWM method to generate accurate test voltages that do not depend on the supply voltage
- Ramp timer function for increasing or decreasing the applied voltage during dielectric strength testing at user-specified times

Model No. (Order Code) 3153

(Insulation, AC/DC Withstanding Voltage)

■ Basic specifications (Accuracy guaranteed for 1 year)**[Withstanding test section]**

Testing voltage	6.2 kV to 3.0 kV AC, 500 VA (max. 30 minutes), 0.2 kV to 5.0 kV DC, 50 VA (continuous)
Voltage setting	Digital setting (0.01 kV setting resolution)
Waveform/Frequency	Sine wave (5% octave distortion, unclipped), 50/60 Hz selectable
Current measurement	0.01 mA to 100.0 mA, Average rectified display (0.1 μA)
Measurement range	10 mA (0.01 mA resolution), 100 mA (0.1 mA resolution)
Voltmeter	Digital accuracy ±1.5% F.s. (F.s.=5.0 kV) (Average rectified display)
Decision method	Window comparison (digital settings)

[Insulation test section]

Rated testing voltage	50 to 1,200 V DC (in 1 V steps)
Rated testing current	1 mA, Short-circuit current: 200 mA or less
Measurement range / accuracy	0.10 to 9999 MΩ, 4 ranges, ±4% rdg (representative value for 0.5 MΩ to 1,000 MΩ)
Decision method	Window comparison (digital settings)

*Test times may differ from set timer times depending on the load.

Setting range	0.3 to 999 s
Pump, Delay	Testing voltage ramp-up, or down, Insulation test delay: 0.1 to 99.9 s

[General section]

Functions	Program up to 32 files of 50 step test settings. 10 sets each of dielectric strength and insulation test settings, hold, buzzer
Monitor functions	Output voltage, detected current, measured resistance, Refresh rate: 2 times/s
Power supply	100 to 120 V, 200 to 240 V AC, (50/60 Hz), 1000 VA max.
Dimensions and mass	320 mm (12.60 in)W × 155 mm (6.10 in)H × 480 mm (18.9 in)D, 18 kg (34.9 lb)
Included accessories	IEV, Test lead 9615 (high voltage side and return, 1 each) ×1, Power cord ×1, Instruction manual ×1, Spare fuse ×1



For Multi-point, High-voltage Automatic Testing and Automation of Insulation and Dielectric Strength Testing

HIGH VOLTAGE SCANNER 3930



CE

3-year
Warranty

- Output of the input high voltage from a user-selected channel
- 8 ch per unit (single mode), with up to 32 ch (4 connected units)
- Isolated high-voltage I/O, control signal lines, and power supply
- Control using the 3153 program function or with a standard sequencer

Model No. (Order Code) 3930


(For the 3153 and similar products)

■ Basic Specifications

Operation modes	Multi-mode: Scanning of user-selected points for high 4 ch / low 4 ch Single mode: Common scan of high 8 ch - common
Rated voltage used	5 kV AC / 5 kV DC
Operation indications	Lamps light up when power is supplied and when a specified channel is operating.
[Relay area]	
Max. open and closed voltage	5000 V DC, 5000 V AC
Max. open and closed current	1.0 A (open and closed capacity: 50 W)
Contact point indirect contact resistance	500 mΩ or less, with 1 mA AC
Contact point max capacity	50 W
Time	Operation time: 6 ms or less, Recovery time: 6 ms or less
Power supply	V23V 24 V DC, #100 (applied using the control signal input connector), 12 VA max.
Dimensions and mass	316 mm (12.44 in)W × 100 mm (3.94 in)H × 350 mm (13.78 in)D, 4.2 kg (9.4 lb)
Included accessories	Control input connector connection cable ×1, IEV, Test lead 9615-01 (red) ×8, HV, Test lead (black) ×1, Grounding cable ×1, Instruction manual ×1

*The 9615-01 is included.H.V. TEST LEAD 9615-01
Red, high voltage side, 1.5 m
(4.92 ft) length

SAFETY TEST DATA MANAGEMENT SOFTWARE 9267

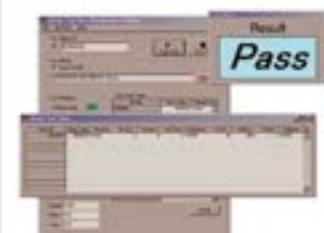

Control insulation, dielectric strength, protective continuity, and leak current testing from a PC

Model No. (Order Code) 9267

- Control the ST5520*/ST5540 as well as the 3153/3154/3156/3157, 3174, and other instruments from a computer
- *Control of the ST5520 is subject to certain limitations.
- Perform automatic insulation and dielectric strength testing of up to 32 points with the High Voltage Scanner 3930

Power Analyzers

Providing the ultimate power analyzer for use by all engineers pursuing power conversion efficiency

POWER ANALYZER PW8001



- World-class measurement accuracy
 - Basic accuracy $\pm 0.03\%$, DC accuracy $\pm 0.05\%$, 50 kHz accuracy 0.2%
 - Accurate frequency distribution of active power with superior noise resistance and Power Spectrum Analysis
 - Sampling performance 18-bit¹, noise resistance (CMRR) 110 dB, 100 kHz
 - 1 ms data refresh while maintaining maximum accuracy
 - Real-time synchronization of two units via optical link
 - Maximum number of measurement channels: 16 CH
 - settings and analysis can be performed for each channel²
 - Current sensor automatic phase shift function
 - Simultaneous analysis of 4 motors (option)
 - Integration of measurement data into CAN networks (option)
 - Safe evaluation of increasingly high-voltage solar inverters
 - + 1500 V DC CAT II / 1000 V DC CAT III³

1. When using the Input Unit U7005

2. IEC synchronization is for data acquisition only

3. When using the Input Unit U7001

Model No. (Order Code)	PW8001-01
PW8001-02	(DA output)
PW8001-03	(CAN/CAN FD)
PW8001-04	(Optical link)
PW8001-05	(DA output, optical link)
PW8001-06	(CAN/CAN FD, optical link)
PW8001-11	(Motor analysis)
PW8001-12	(Motor analysis, DA output)
PW8001-13	(Motor analysis, CAN/CAN FD)
PW8001-14	(Motor analysis, optical link)
PW8001-15	(Motor analysis, DA output, optical link)
PW8001-16	(Motor analysis, CAN/CAN FD, optical link)

- Input units must be specified at the time of ordering.

- Optional input units, voltage cords, and current sensors are required for measurement.

■ Basic specifications

(Accuracy guaranteed for 6 months, multiplying the 6-month accuracy reading error by 1.5 to obtain the 1-year accuracy)

Measurement lines	1-phase-2-wire, 3-phase-3-wire, 3-phase-4-wire, 2-phase-4-wire
No. of input units	Max. 8 units (max 16 total)
Type of input unit	U7001: 2.5 MHz INPUT UNIT, U7005: 15 MHz INPUT UNIT
Measurement frequency band	U7001: DC, 0.1 Hz to 1 MHz U7005: DC, 0.1 Hz to 5 MHz
Sampling	U7001: 2.5 MHz, 16-bit, U7005: 15 MHz, 18-bit
Data update rate	1 ms, 10 ms, 50 ms, 200 ms $\pm 0.5\%$ of reading + % of range)
Accuracy for power	U7001: (50 Hz/60 Hz) $\pm 0.02\% + 0.05\%$, (DC) $\pm 0.02\% + 0.05\%$, (50 kHz) $0.4\% + 0.3\%$ U7005: (50 Hz/60 Hz) $\pm 0.01\% + 0.02\%$, (DC) $\pm 0.02\% + 0.03\%$, (50 kHz) $0.1\% + 0.05\%$
Measurement range	Voltage: 6 V 15 V 30 V 60 V 150 V 300 V 600 V 1500 V Current: (Probe1) 40 mA to 2 kA, (Probe2) 100 mA to 50 kA (Probe1: Hioki's high-accuracy current sensor interface supports automatic identification and phase shift. Probe2: BNC LF only for U7001)
Measurement parameters	Voltage (U), Current (I), Active power (P), Apparent power (S), Reactive power (Q), Power factor (PF), Phase angle (phi), Voltage frequency (f), Current frequency (f), Efficiency (η), Loss (Loss), Voltage ripple factor (URF), Current ripple factor (ICRF), Current integration (Wi), Power integration (WP), Voltage peak (UPk), Current peak (Ikpk)
Calculation function	Efficiency-loss calculations, User-defined formula, Delta conversion, Current sensor automatic phase shift
External interface	USB flash drive, LAN, GPIB, RS-232C, external control, optical link, BNC sync, CAN or CAN FD
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 230 VA
Dimensions and mass	Approx. 430 mm (16.9 in) W x 221 mm (8.7 in) H x 361 mm (14.2 in) D Approx. 340 g (0.75 lb)
Included accessories	Power cord x 1, Instruction manual x 1, CONNECT One (PC Application) CD x 1, D-sub 25-pin connector x 1 (PW8001-02, -05, -12, -15 Only)

Power Analyzers

Options for PW8001

For other options, please see the product catalog.

<p>Input units</p> <p>2MS/S INPUT UNIT U7001 15MS/S INPUT UNIT U7005</p> <p>* As required for PW8001/0PW8001/0PW8001-1000A</p>	<p>AC/DC CURRENT BOX PW9100A-3 3 channels, DC to 1.5 MHz, CMRR 120dB, 30 A AC/DC input, ±0.02% amplitude accuracy, ±0.1° phase accuracy</p> <p>AC/DC CURRENT BOX PW9100A-4 4 channels, DC to 1.5 MHz, CMRR 120dB, 50 A AC/DC input, ±0.02% amplitude accuracy, ±0.1° phase accuracy</p>	<p>Up to 20 A (High precision)</p> <p>AC/DC CURRENT PROBE CT6840, CT6831 DC to 100 kHz, 2 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy, 0.1 mV (0.26 uV), ME15W terminal</p> <p>AC/DC CURRENT PROBE CT6841A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p>Up to 50 A (High precision)</p> <p>AC/DC CURRENT SENSOR CT6872 High accuracy pass-through, DC to 10 MHz, 50 A input, ±0.3% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal</p> <p>AC/DC CURRENT SENSOR CT6862-05 High-precision pull-through type, DC to 1 MHz, 50 A input, ±0.2% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal</p> <p>Up to 200 A (High precision)</p> <p>AC/DC CURRENT SENSOR CT6873 High accuracy pass-through, DC to 10 MHz, 200 A input, ±0.3% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal</p> <p>AC/DC CURRENT SENSOR CT6863-05 High-precision pull-through type, DC to 100 kHz, 200 A input, ±0.05% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal</p> <p>AC/DC CURRENT PROBE CT6843A DC to 500 kHz, 200 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p>CLAMP ON SENSOR 9272-05 1 Hz to 100 kHz, 20/200 A switching input, ±0.6% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal</p>	<p>Up to 500 A (High precision)</p> <p>AC/DC CURRENT SENSOR CT6874A High-precision pull-through type, DC to 2 MHz, 500 A input, ±0.4% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p> <p>AC/DC CURRENT PROBE CT6844A DC to 200 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p>AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p>Up to 1000 A (High precision)</p> <p>AC/DC CURRENT SENSOR CT6876A High-precision pull-through type, DC to 1.5 MHz, 1000 A input, ±0.4% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p> <p>AC/DC CURRENT PROBE CT6846A DC to 20 kHz, 1000 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p>Up to 2000 A (High precision)</p> <p>AC/DC CURRENT SENSOR CT6877A High-precision pull-through type, DC to 1 MHz, 2000 A input, ±0.4% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p>	<p>Up to 8000 A (High precision)</p> <p>Aggregate and measure large currents in multi-cable circuits Use multiple AC/DC Current Sensors CT6870A units with the Sensor Unit CT9557 to measure currents of up to 8000 A in multi-cable circuits. Requires 3 connection cables to connect the PW8001/0PW8001/0PW8001-1000A to the CT9557.</p> <p>SENSOR UNIT CT9557 Power supply for current sensors (4x), with Waveform/Total/Waveform/Total RMS output</p> <p>CONNECTION CABLE CT9904 ME15W (12 pin) terminal to ME15W (12 pin) terminal, L = 0.28 (0) length for connecting CT9557 total output to PW8001 only</p> <p>AC/DC CURRENT SENSOR CT6877A High-precision pull-through type, DC to 1 MHz band width, 2000 A input, ±0.4% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal (±0.1% amplitude accuracy, ±0.1° phase accuracy in case of flat addition wave output)</p> <p>CONVERSION CABLE CT9900 Connect PL23 (11 pin) terminal to ME15W (12 pin) terminal *When using a PL231 terminal resistor, Conversion Cable CT9900 must be used to connect to ME15W terminal.</p>
<p>Voltage probe</p> <p>VOLTAGE CORD L1025 1000 V CATIII 1A, 1000 V CATIV, 1A, banana-banana/red, black shield, alligator clip, 3 m (9.84 ft) length</p> <p>VOLTAGE CORD 1943B-50 Blaupunkt Red, 5 m (9.84 ft) length, Alligator clip x 2</p> <p>VOLTAGE CORD L1000 1000 V specifications, Red/Yellow/Blue/Grey each, 1 Black 4 Alligator clip x 2, 3 m (9.84 ft) length</p>	<p>CONNECTION CORD L9257 1000 V CATIII, 30 A, 600 V CATIV, 30 A, banana-banana, Red, Black each, 1 Alligator clip, 1.2 m (3.94 ft) length</p> <p>PATCH CORD L1021-01 Banana branch-to-banana, Red, 1, Cable length: 0.5 m, for branching from the L9438 series or L9439 series, CAT 1V 600 V, CAT III 1000 V</p> <p>PATCH CORD L1021-02 Banana branch-to-banana, Black, 1, Cable length: 0.5 m, for branching from the L9438 series or L9439 series, CAT 1V 600 V, CAT III 1000 V</p> <p>GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/Black 1 each, 17 cm (7.01 in) length, CAT II 600 V</p>	<p>CONNECTION CABLE SET L4940 1000 V CATIII 10 A, 600 V CATIV, 10 A, banana-banana (red, black each), 1.5 m (4.92 ft) length</p> <p>ALLIGATOR CLIP SET L4935 1000 V CATIII 10 A, 600 V CATIV, 10 A, red, black each 1</p>		
<p>Optical connection</p> <p>OPTICAL CONNECTION CABLE L6000 300/12.5 µm wavelength, multimode fiber, 10 m (32.81 ft) length</p> <p>LAN CABLE 9642 Rj45/BNC cable, supplied with crimp, 10 core connection, adapter, 2 m (6.41 ft) length</p>	<p>RS-232C CABLE 9637 For RS-232, Rj45, female, 1.8 m (5.91 ft) length</p> <p>CONNECTION CABLE 9444 Front panel control interface, 5 pins - 9 pins, 1.5 m (4.92 ft) length</p> <p>OP-B CONNECTOR CABLE 9159-02 2x9/36 pin length</p> <p>CONNECTION CORD L9217 Cat 5e horizontal BNC connection at both ends, 16xCAT5E RJ45 length</p>	<p>CONNECTION CORD 9165 Cat 5e horizontal BNC connection at both ends, 16xCAT5E RJ45 length</p> <p>CAN CABLE 9713-01 For the MR3944, unshielded twisted pair end, 1.5 m (4.92 ft) length</p>		
<p>The following modules are available as accessories. Please contact your dealer or distributor for more information.</p> <ul style="list-style-type: none"> • CARRYING CASE CS601 (hard trunk, with cables) • DIN OUTPUT CABLE L3000 D-sub 25-pin/BNC (male) 20-channel conversion cable • BNC TERMINAL BOX 25200 D-sub 25-pin/BNC (female) 20-channel conversion box • RACKMOUNT FITTING 025200 (For EIA standard rack) • RACKMOUNT FITTING 025301 (For JIS standard rack) 				

Power Analyzers

Improve Power Conversion Efficiency

POWER ANALYZER PW6001



- Exclusive current sensor phase shift function lets you maintain accuracy even in high frequency, low power factor applications.
- Basic accuracy of $\pm 0.02\%$ ¹⁾ for power measurement.
*1 PW6001 accuracy only. Instrument delivers accuracy of $\pm 0.07\%$ even after the current sensor accuracy has been added.
- High noise resistance and stability (30 dB/100 kHz CMRR, $\pm 0.01\%$ /°C temperature characteristics)
- Accurate measurement even when the load is characterized by large fluctuations; TrueHD 18-bit resolution
- 10 ms data refresh while maintaining maximum accuracy (using a specially designed IC to make all measurements independently while performing simultaneous calculations.)
- DC accuracy of $\pm 0.07\%$, which is key for stable, accurate efficiency measurement
- Wide frequency bandwidth of DC, or 0.1 Hz to 2 MHz
- Achieve true frequency analysis with high-speed 5MS/s sampling (18 bit)
- Synchronize 2 units for up to 12 channels²⁾ in real time
*2 Two 6-channel models can be connected with an optical connection cable
- Special triggers to enable waveform analysis and motor analysis without the need for an oscilloscope
- Wideband harmonic analysis up to the 100th order with a 1.5 MHz band
- Send measured values to HiOKI data loggers using a Bluetooth® wireless technology compatible adapter (LR8410 Link-compatible products)

Model No. (Order code)	PW6001-01	(1ch) PW6001-11	(3ch, motor analysis, DA output)
	PW6001-02	(2ch) PW6001-12	(2ch, motor analysis, DA output)
	PW6001-03	(3ch) PW6001-13	(3ch, motor analysis, DA output)
	PW6001-04	(4ch) PW6001-14	(4ch, motor analysis, DA output)
	PW6001-05	(5ch) PW6001-15	(5ch, motor analysis, DA output)
	PW6001-06	(6ch) PW6001-16	(6ch, motor analysis, DA output)

Note: Optional voltage cords and current sensor are required for taking measurements. ²⁾Specify the number of built-in channels and inclusion of Motor analysis & DA output upon order for factory installation. These options cannot be changed or added at a later date.

■ Basic specifications (Accuracy guaranteed for 6 months, multiply the 6-month accuracy by 1.5 to obtain the 1-year accuracy)	
Measurement line type	Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire
Number of input channels	Max. 6 channels; each input unit provides 1 channel for simultaneous voltage and current input (Voltage measurement unit: Photo-isolated input, resistance voltage divider, Current measurement unit: Isolated input from current sensor)
	Voltage (U), current (I), active power (P), apparent power (S), reactive power (Q), power factor (PF), phase angle (θ), efficiency (η), loss (L _{eff}), voltage ripple factor (Mr), current ripple factor (Ir), current integration (I _{int}), power integration (WP), voltage peak (U _{pk}), current peak (I _{pk})
	Harmonic measurement: Harmonic active power, select calculation order from 2nd order to 100th order
	Waveform recording: Voltage and current waveforms/ Motor pulse. Always 5 MS/s
	Motor waveforms: Always 50 kS/s, 16 bits
	Recording capacity: 1 Ms word × (voltage + current) × number of channels + motor waveforms
	Motor analysis (PW6001-11 to -16 only): Voltage, Torque, Rotation, Frequency, Slip, or Motor output
Measurement range	Voltage range: 6 to 1500 V, 8 ranges Current range (Probe 1): 400 mA to 1 kA (depends on current sensor) Current range (Probe 2): 100 mA to 50 kA (depends on current sensor) Power range: 2.40000W to 4.50000MW (depends on combination of voltage and current range) Frequency range: 0.1 Hz to 2 MHz
Basic accuracy	Voltage: $\pm 0.02\%$ r.dg. $\pm 0.02\%$ f.s. Current: $\pm 0.02\%$ r.dg. $\pm 0.02\%$ f.s. Active power: $\pm 0.02\%$ r.dg. $\pm 0.03\%$ f.s.
Synchronization frequency range	Power measurement: 0.1 Hz to 2 MHz Harmonic measurement: 45 Hz to 66 Hz (IEC standard mode), 0.1 Hz to 300 kHz (Wideband mode)
Frequency band	DC, 0.1 Hz to 2 MHz
Data update rate	Power measurement: 10 ms / 50 ms / 200 ms Harmonic measurement: 200 ms (IEC standard mode), 50 ms (Wideband mode)
Data save interval	OFF, 10 msec to 500 msec, 1 sec to 20 sec, 1 minute to 60 minutes. User-selected from all measured values, including harmonic measured values. Specified measured values can be saved in internal memory or USB flash drive.
External interfaces	USB (memory), LAN, GP-BT, RS-232C (for communication/LR8410 link), External control, Synchronization control
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter. (Supported devices: Hioki LR8410 Link-compatible logger), Ver. 2.0 and later
Power supply	100 to 240 V AC, 50/60 Hz, 200 VA max.
Dimensions and mass	430 mm (16.93 in)/W × 177 mm (6.97 in)/H × 450 mm (17.72 in)/D, 5.4 kg (11.84 lb) (PW6001-16)
Included accessories	Instruction Manual × 1, Power cord × 1, D-sub connector × 1 (PW6001-1x only)

Power Analyzers

Options for PW6001

For other options, please see the product catalog.

AC/DC CURRENT BOX PW9100A-3		AC/DC CURRENT BOX PW9100A-4		Up to 20 A (High precision)		Up to 500 A (High precision)		Up to 8000 A (High precision)			
3 channels, DC to 1.5 MHz, CMRR 1.20dB, 10 A AC/DC input, ±0.02% amplitude accuracy, ±0.1° phase accuracy		4 channels, DC to 1.5 MHz, CMRR 1.20dB, 10 A AC/DC input, ±0.02% amplitude accuracy, ±0.1° phase accuracy		AC/DC CURRENT PROBE CT68800 DC to 100 kHz, 2 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ±0.1 mm (0.25 in), ME15W terminal	AC/DC CURRENT SENSOR CT68904A High precision pull-through type, DC to 4.5MHz, 500 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6875A High precision pull-through type, DC to 2.5MHz, 500 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6844A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 100 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6877A High precision pull-through type, DC to 1 MHz, 1000 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		
				AC/DC CURRENT PROBE CT68801 DC to 100 kHz, 20 A input, ±0.0% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6844A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 100 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6844A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 100 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6877A High precision pull-through type, DC to 1 MHz, 1000 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		
				AC/DC CURRENT PROBE CT68801 DC to 100 kHz, 20 A input, ±0.0% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6844A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 100 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6844A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 100 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6877A High precision pull-through type, DC to 1 MHz, 1000 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		
Up to 50 A (High precision)		Up to 1000 A (High precision)		Up to 2000 A (High precision)		Up to 500 A (High speed)		Up to 500 A (High speed)			
AC/DC CURRENT SENSOR CT6872 High accuracy pass-through, DC to 10 MHz, 50 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		AC/DC CURRENT SENSOR CT6876A High precision pull-through type, DC to 1.5MHz, 1000 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		AC/DC CURRENT SENSOR CT6877A High precision pull-through type, DC to 1 MHz, 1000 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		CURRENT PROBE CT6700 Wide DC to 10 MHz bandwidth, 1 mA to 5 A rms		CLAMP ON PROBE 3273-50 Wide DC to 10 MHz bandwidth, 10 mA-class to 50 A rms			
AC/DC CURRENT SENSOR CT6862-05 High-precision pull-through type, DC to 1 MHz, 50 A input, ±0.0% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal		AC/DC CURRENT PROBE CT6846A DC to 20 kHz, 1000 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal		AC/DC CURRENT PROBE CT6877A High-precision pull-through type, DC to 1 MHz, 1000 A input, ±0.0% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal		CURRENT PROBE CT6701 Wide DC to 120 MHz bandwidth, 1 mA to 5 A rms		CLAMP ON PROBE 3276 Wide DC to 100 MHz bandwidth, 10 mA-class to 50 A rms			
AC/DC CURRENT PROBE CT6843A DC to 500 kHz, 200 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal											
Up to 5 A (High speed)		Up to 30 A (High speed)		Up to 500 A (High speed)		Up to 500 A (High speed)		Other options			
CURRENT PROBE CT6700 Wide DC to 10 MHz bandwidth, 1 mA to 5 A rms		CLAMP ON PROBE 3273-50 Wide DC to 10 MHz bandwidth, 10 mA-class to 50 A rms		CLAMP ON PROBE 3274 Wide DC to 10 MHz bandwidth, up to 200 A rms		CLAMP ON PROBE 3275 Wide DC to 2 MHz bandwidth, up to 500 A rms		<ul style="list-style-type: none"> Carrying case (hard trunk, with casters) D/A output cable, D-sub-25-pin-BNC (male), 20 ch conversion Bluetooth® serial converter adapter cable, 1 m (3.28 ft) Radial lead fittings (EIA, JIS) Optical connection cable, Max. 500 m (1640.55 ft) length PW61005-A rating version 			
CURRENT PROBE CT6701 Wide DC to 120 MHz bandwidth, 1 mA to 5 A rms		CLAMP ON PROBE 3276 Wide DC to 100 MHz bandwidth, 10 mA-class to 50 A rms									
VOLTAGE CORD L9438-50 1000 V sprung testleads, Red/Black/Red, 1 m (3.28 ft) length, Alligator clip × 2, 3 m (9.84 ft) length		GRABBER CLIP L9243 Attaches to the top of the fence on plug cable, Red/Black/Black, 1 m each, 300 way, (2.26 m) length, CATIII 1000 V		PATCH CORD L1021-01 Braided braided braided, Red/Black, 1 m, Cable length: 0.5 m, For branching from the L9438 series or L9000 series, CATIV 600V, CATIII 1000 V		PATCH CORD L1021-02 Braided braided braided, Black/Black, 1 m, Cable length: 0.5 m, For branching from the L9438 series or L9000 series, CATIV 600V, CATIII 1000 V					
OPTICAL CONNECTION CABLE L6000 30021 µm wavelength multimode fiber, 1.5 m (3.28 ft) length		LAN CABLE 9642 Straight Ethernet cable, supplied with an RJ45 to RJ45 conversion adapter, 1 m (3.28 ft) length		RS 232C CABLE 96017 For the PC, 9-pin - 9-pin, 1.5 m (3.28 ft) length		CONNECTION CABLE 9444 For external control interface, 9 pin - 9 pin, 1.5 m (4.92 ft) length		GP/IB CONNECTOR CABLE 9151-02 2 m (6.56 ft) length		CONNECTION CORD L9217 Cordless cordless BNC connectors at both ends, 1.5 m (3.28 ft) length	

Power Analyzers

High-accuracy Power Analysis - Anywhere, Anytime

POWER ANALYZER PW3390



- >0.04% basic power accuracy, among the best in its class
- 200 kHz measurement band with flat amplitude and phase accuracy that extend to high frequencies
- Remarkably small and light footprint, enabling high-accuracy measurement to be easily carried out even in the field
- High-accuracy, high-speed calculation of transient-state power in 50 ms; harmonic analysis; display of instantaneous waveforms; noise analysis; and simultaneous parallel calculation of all parameters, including efficiency loss
- Send measured values to HIOKI data loggers using a Bluetooth® wireless technology compatible adapter (LR8410 Link-compatible products)
- Simultaneous measurement of multiple circuits and ability to acquire synchronized data using up to 8 devices (or 32 channels)
- Simple power measurement using clamp-on current sensors
- Measurement of current and power inputs and outputs as part of the new international WLTP fuel efficiency standard

Model No. (Order Code) PW3390-01

PW3390-02 (D/A output)

PW3390-03 (D/A output, motor analysis)

Note: PW3390 by itself does not support current and power measurements. Optional current sensor and voltage card are necessary to measure current or power parameters. Specify inclusion of Motor analysis & D/A output upon order for factory installation. These options cannot be changed or added after delivery.

■ Basic specifications (Accuracy guaranteed for 1 year)	
Measurement line type	Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire, voltage 4 channels, current 4 channels, isolated between each channel
Basic measurement parameters	Frequency, rms voltage, voltage mean value rectification rms equivalent, voltage AC component, voltage simple average, voltage fundamental wave component, voltage waveform peak \pm , voltage waveform peak \times , voltage total harmonic distortion, voltage ripple factor, voltage imbalance factor, rms current, current total value rectification rms equivalent, current AC component, current simple average, current fundamental wave component, current waveform peak \pm , current waveform peak \times , current total harmonic distortion, current ripple factor, current imbalance factor, active power, apparent power, reactive power, power factor, voltage phase angle current phase angle, power phase angle, positive-direction current magnitude, negative-direction current magnitude, positive-direction power magnitude, negative-direction power magnitude, sum of positive- and negative-direction power magnitude, efficiency, lost Current integration, active power integration
PW3390-03 only	Torque, Rotation, Frequency, Slip, or Motor power
Harmonic measurement	Input: 4 ch. Synchronization frequency range: 0.5 Hz to 5 kHz; Number of harmonic orders: Max. 100th order
Noise measurement	Number of channels: 1 ch (select one channel from CH1 to CH4); Maximum analysis frequency: 200, 50, 20, 10, 5, 2 kHz
Motor Analysis (PW3390-03 only)	Input: 3 ch (CH A, CH B, CH Z), Measurement parameters: Voltage, torque, rotation rate, frequency, slip, and motor power
Measurement range	Voltage range: 15 to 1200 V, 7 ranges Current range: 0.1 A to 20 kA (depends on current sensor)
Effective measuring power range	0.0150 W to 20.000 MW (determined automatically by the combination of voltage range, current range, and measurement line)
Basic accuracy (45 to 66 Hz)	Voltage: $\pm 0.04\%$ rdg, $\pm 0.05\%$ fs. Current: $\pm 0.04\%$ rdg, $\pm 0.05\%$ fs. Active power: $\pm 0.04\%$ rdg, $\pm 0.05\%$ fs.
Synchronization frequency range	0.5 Hz to 5 kHz
Frequency band	DC, 0.5 Hz to 200 kHz
Data update rate	50 ms (for harmonics/frequency measurement), depends on the synchronization frequency (less than 0.5 Hz)
Display refresh rate	200 ms (Independent of internal data update rate; waveform and FFT depend on the screen)
Auto-Save Functions	Each value is stored to CF card during every measurement interval (not available for U2B storage OFF, 50 ms to 500 ms, 1 s to 30 s, 1 min to 60 min, 15 settings)
External interfaces	LAN, USB (for communication/memory), RS-232C (for communication/LR8410 link), CF card, Synchronization control, External Control
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter (Supported devices: Hioki LR8410 Link-compatible logger)
Power supply	100 to 240 V AC, 50/60 Hz, 140 VA max.
Dimensions and mass	340 mm (13.39 in) W × 170 mm (6.69 in) H × 156 mm (6.14 in) D, 4.6 kg (10.13 lb)
Included accessories	Instruction Manual × 1, power cord × 1, Measurement Guide × 1, U3B cable × 1, input cord label × 2, D-sub connector × 1 (PW3390-01, PW3390-03)

Accurately Measure High Voltages up to 5000 V, Ideal for Measuring the Efficiency of High-voltage Inverters

AC/DC HIGH VOLTAGE DIVIDER VT1005



- Divides high voltage by 1000:1 and outputs Max. Input 5000 V (1), 2000 V CAT II, 1500 V CAT III
- Measure the efficiency of high-efficiency inverters with a high degree of precision Measurement accuracy: $\pm 0.08\%$ (DC), $\pm 0.04\%$ (50/60 Hz), $\pm 0.17\%$ (50 kHz)
- Frequency flatness: $\pm 0.1\%$ amplitude band 200 kHz typical, $\pm 0.1^\circ$ phase band 500 kHz typical (2)

Measurement band: DC to 4 MHz (-3 dB)

Noise resistance: CMRR 80 dB typical (100 kHz), differential input method

(1) ± 4700 V peak, no measurement category, maximum measured overvoltage: 57 V

(2) After phase correction by the power analyzer

Model No. (Order Code) VT1005

■ Basic specifications (Accuracy guaranteed for 1 year)

Maximum rated voltage	5000 V rms, 47000 V peak (within the frequency derating range)
Maximum rated voltage (line-to-ground)	No measurement category: 5000 V AC/DC (1) Measurement category I: 2000 V AC/DC (1) Measurement category III: 1500 V AC/DC (1)
Measurement accuracy	$\pm 0.08\%$ (DC), $\pm 0.04\%$ (50/60 Hz), $\pm 0.17\%$ (50 kHz)
Frequency flatness	Band where amplitude falls within $\pm 0.1\%$ range: 200 kHz (typical) Band where phase falls within $\pm 0.1^\circ$ range: 500 kHz (typical) (2)
Measurement bandwidth	DC to 4 MHz (amplitude and phase accuracy specified up to 1 MHz)
Voltage dividing ratio	1000:1
Common-mode voltage rejection ratio (CMRR)	50 Hz-60 Hz: 90 dB (typical) 300 kHz: 80 dB (typical)
Measurement method	Differential input
Operating temperature and humidity range	-40°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)
Power supply	100 V to 240 V AC (50/60 Hz)
Dimensions and mass	Approx. 195.0 mm (7.68 in) W × 83.2 mm (3.28 in) H × 346.0 mm (13.62 in) D mm, approx. 2.2 kg (4.96 oz.)
Included accessory	L1050-01, Voltage Cord (1.6 m / 5.25 ft) × 1, L9217 Connection Cord (insulated BNC, 1.6 m / 5.25 ft) × 1, 9704 Conversion Adapter (insulated-female BNC-to-banana plug) × 1, Power cord × 1

(1) After phase correction by the power analyzer

(2) 4700 V peak, anticipated transient overvoltage 0 V

(3) Anticipated transient overvoltage 12000 V

(4) Anticipated transient overvoltage 10000 V

Options	VOLTAGE CORD L1050-01 1.6 m (5.25 ft) length	VOLTAGE CORD L1050-03 3.0 m (9.84 ft) length	CONNECTION CORD L9217 Card has insulated BNC connectors at both ends, 1.6 m (5.25 ft) length	CONNECTION CORD L9217-01 Card has insulated BNC connectors at both ends, 3.0 m (9.84 ft) length	CONNECTION CORD L9217-02 Card has insulated BNC connectors at both ends, 10 m (32.81 ft) length	CONVERSION ADAPTER 9704 Receiving side BNC (female), output banana (male)

Power Analyzers


Options for PW3390

For other options, please see the product catalog.

Up to 20 A (High precision) AC/DC CURRENT PROBE CT6801 DC to 100 kHz, 20 A input, ±0.3% amplitude accuracy, ±0.1° phase accuracy, Ø 5 mm (Ø 20 mm), ME15W terminal AC/DC CURRENT PROBE CT6841A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	Up to 500 A (High precision) AC/DC CURRENT SENSOR CT6904A High-precision pull-through type, DC to 4 MHz, 500 A input, ±0.2% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal AC/DC CURRENT SENSOR CT6875A High-precision pull-through type, DC to 2 MHz, 500 A input, ±0.04% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal AC/DC CURRENT PROBE CT6844A DC to 200 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	Up to 8000 A (High precision) Aggregate and measure large currents in multi-cable inputs Use multiple AC/DC Current Sensors CT6875A units with the Sensor Unit CT955T to measure currents of up to 8000 A in multi-cable circuits. Requires 3 connection cables to connect the PW3390/PW3390 to the CT955T.					
Up to 50 A (High precision) AC/DC CURRENT SENSOR CT6872 High accuracy pass-through, DC to 10 MHz, 50 A input, ±0.03% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal AC/DC CURRENT SENSOR CT6882-05 High-precision pull-through type, DC to 1 MHz, 50 A input, ±0.03% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal	Up to 1000 A (High precision) AC/DC CURRENT SENSOR CT6876A High-precision pull-through type, DC to 1.5 MHz, 1000 A input, ±0.04% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal AC/DC CURRENT PROBE CT6846A DC to 20 kHz, 1000 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	Up to 2000 A (High precision) AC/DC CURRENT SENSOR CT6877A High-precision pull-through type, DC to 1 MHz band width, 2000 A input, ±0.04% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal					
Up to 200 A (High precision) AC/DC CURRENT SENSOR CT6873 High accuracy pass-through, DC to 10 MHz, 200 A input, ±0.03% amplitude accuracy, ±0.0° phase accuracy, ME15W terminal AC/DC CURRENT SENSOR CT6883-05 High-precision pull-through type, DC to 500 kHz, 200 A input, ±0.03% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal AC/DC CURRENT PROBE CT6843A DC to 500 kHz, 200 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal CLAMP ON SENSOR 9272-05 1 Hz to 100 kHz, 20/200 A switching rapid, ±0.3% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal	Up to 5000 A (High precision) AC/DC CURRENT BOX PW9100A-3 3 channels, DC to 3.5 MHz, CMRR 120 dB, 50 A AC/DC input, ±0.6% amplitude accuracy, ±0.1° phase accuracy AC/DC CURRENT BOX PW9100A-4 4 channels, DC to 3.5 MHz, CMRR 120 dB, 50 A AC/DC input, ±0.6% amplitude accuracy, ±0.1° phase accuracy	AC/DC HIGH VOLTAGE DIVIDER VT1005 Divide voltage of up to 5000 V and outputs Measurement band: DC to 4 MHz (-3 dB) Measurement accuracy: ±0.00% (DC), ±0.04% (500 Hz, ±17% (50 kHz))					
Current Input Tools AC/DC CURRENT SENSOR CT7442 DC to 100 kHz, 2000 A AC/DC, Ø 25 mm (Ø 70 mm), 2.5 m (8.2 ft) cord length, Output connector: PL4 terminal AC/DC AUTOZERO CURRENT SENSOR CT7742 DC to 3 kHz, 2000 A AC/DC, Ø 25 mm (Ø 70 mm), 2.5 m (8.2 ft) cord length, Output connector: PL4 terminal CONVERSION CABLE CT9900 Required to connect the PW3390 or other instruments of ME15W to a current sensor with a PL4 output connector	Current Input Tools AC FLEXIBLE CURRENT SENSOR CT7044 6000 A AC, Ø 60 mm (Ø 94 mm), 2.5 m (8.2 ft) cord length, PL4 terminal AC FLEXIBLE CURRENT SENSOR CT7045 6000 A AC, Ø 60 mm (Ø 94 mm), 2.5 m (8.2 ft) cord length, PL4 terminal AC FLEXIBLE CURRENT SENSOR CT7046 6000 A AC, Ø 25 mm (Ø 30 mm), 2.5 m (8.2 ft) cord length, PL4 terminal CONVERSION CABLE CT9900 Required to connect the PW3390 or other instruments of ME15W to a current sensor with a PL4 output connector	Other Options <ul style="list-style-type: none"> • DA output cable • D-sub 25-pin - BNC (male) • Rackmount fittings (For DA or JIS) • PW9100 SA rated model 					
Voltage Input Tools VOLTAGE CORD L943B-50 Black/Red, 2 m (6.6 ft) length, Alligator clip x2, 3 m (9.8 ft) length VOLTAGE CORD L1000 1000 V specification, Red/Yellow/Blue/Grey each, Black 4, Alligator clip 4, 3 m (9.8 ft) length	 EXTENSION CABLE SET L4931 To provide the length of the cable with banana plug, 1.5 m (4.9 ft) length	 WIRING ADAPTER PW9000 With three-plane 4-mm (SWR) connector, this product allows you to reduce the number of wiring cords from 8 to 3.	 WIRING ADAPTER PW9001 With three-plane 4-mm (SWR) connector, this product allows you to reduce the number of wiring cords from 8 to 4.	 Banana branch-banana, Red 1, Cable length 0.5 m, For branching from the L4930 series or L2000 series, CATIV 400 V, CAT III 600 V	 Banana branch-banana, Black 1, Cable length 0.5 m, For branching from the L4930 series or L2000 series, CATIV 600 V, CAT III 600 V	 Banana branch-banana, Black 1, Cable length 0.5 m, For branching from the L4930 series or L2000 series, CATIV 600 V, CAT III 600 V	 Attaches to the tip of the measuring probe. Red/Black 1 each, 150 mm (5.9 ft) length, CAT III 600 V
Other Options <ul style="list-style-type: none"> • PC Card 20.980 • PC Card 10.9729 • PC Card 512M 9729 	Cables and Adapters CONNECTION CORD L9217 Cable length: 60 cm (24 in) length, 1.5 m (5.2 ft) length LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross connection adapter, 5 m (16.4 ft) length CONNECTION CABLE 9683 For synchronization, cable length 1.5 m (5.2 ft)	 RS-232C CABLE 9607 For synchronization, cable length 1.5 m (5.2 ft) length	PC Card 20.980 PC CARD 10.9729 PC CARD 512M 9729 Ideal to protect your PC card during transportation, with cover	Other Options <ul style="list-style-type: none"> • PC Card 20.980 • PC Card 10.9729 • PC Card 512M 9729 			

New Wideband High-Accuracy Current Measurement Option

AC/DC CURRENT BOX PW9100A

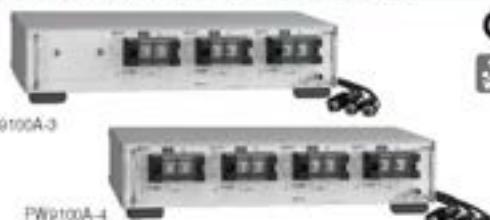

- Combined accuracy with Hioki power analyzer PW8001, PW8001 and PW3390 is specified (DC, 45 Hz ≤ f ≤ 65 Hz). For details of combined accuracy, refer to the instruction manual.
- World-leading measurement bands and accuracy
- Wide-band DC to 3.5MHz, 50A AC/DC rated input
- ±0.055% power accuracy in combination with PW8001 (using U7005, 45 Hz < f ≤ 65 Hz)
- 120dB CMRR (100 kHz)
- Full-rack size suitable for test/evaluation benches
- Current measurement option for POWER ANALYZERS

Model No. (Ort. Code) PW9100A-3 (For the PW8001/PW6001/PW3390, 3 ch.)
PW9100A-4 (For the PW8001/PW6001/PW3390, 4 ch.)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Isolated input, DCCT input
Rated primary current	50 A AC/DC
Number of input channels	PW9100-03: 3 channels, PW9100-04: 4 channels
Maximum input current	60 A, within derating. However, up to ±200 A peak is allowable if within 20 ms (design value)
Amplitude and Phase accuracy	45 Hz < f ≤ 65 Hz (±0.02% rdg ±0.005% Es., Phase: ±0.1 deg.) Accuracy is defined to 1 MHz
Output voltage	2.5 V/50 A
Measurement terminals	Terminal block (with safety cover), M6 screws
Input resistance	1.5 mΩ or less (50 Hz/60 Hz)
Input capacitance	Between measurement terminals and case (secondary side), 40 pF or less, defined at 100 kHz
Operating temperature and humidity	Temperature: 0°C to 40°C (32°F to 104°F), Humidity: 80% RH or less (no condensation)
Power supply	Power supply from PW8001, PW6001, PW3390
Dimensions and mass	430 mm (16.9 in) W × 88 mm (3.46 in) H × 260 mm (10.24 in) D, Weight: PW9100A-3: 3.7 kg (10.5 lb), PW9100A-4: 4.3 kg (15.7 lb)
Included accessory	Instruction Manual, etc.



Power Meters

Accurately Measure Devices Up to 1000 V 65 A AC/DC with Direct Input

POWER METER PW3337



- Compatible with the SPECpower® benchmark for server power consumption
- Measure DC, and single-phase 2-wire to 3-phase 4-wire with 3-channel input
- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- High-precision basic accuracy of ±0.1% (*1)
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- High-current measurement up to 65 A of direct input
- Harmonic measurement up to the 50th order according to IEC 61000-4-7
- High-accuracy measurement, even with a low power factor for no-load testing of transformers and motors
- Built-in external sensor input terminals to measure up to 5000 A AC
- Synchronize up to 8 units for multi-unit measurement
- Create a 6-channel power meter by synchronizing two PW3337 units and using the free PC application

Model No. (Order Code) PW3337 (0-ch)
 PW3337-01 (0-ch, built-in GPIB)
 PW3337-02 (0-ch, built-in DA output)
 PW3337-03 (0-ch, built-in GPIB, DA output)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires, single-phase 3-wires, 3-phase 3-wires, 3-phase 4-wires (voltage / current measurement range set for each wiring mode)
Measurement items	Voltage, Current, Active power, Apparent power, Reactive power, Power factor, Phase angle, Frequency, Efficiency, Current integration, Active power integration, Integrated time, Voltage waveform peak value, Current waveform peak value, Voltage crest factor, Current crest factor, Time average current, Time average active power, Voltage ripple factor, Current ripple factor
Harmonic parameters	Synchronization frequency range: 10 Hz to 640 Hz, Analysis order up to 50th Harmonic voltage rms value, harmonic current rms value, harmonic active power, Total harmonic voltage distortion, total harmonic current distortion, voltage fundamental waveform, current fundamental waveform, active power fundamental waveform, apparent power fundamental waveform, reactive power fundamental waveform, power factor fundamental waveform, displacement power factor, voltage current phase difference fundamental waveform, interchannel voltage fundamental wave phase difference, interchannel current fundamental wave phase difference, harmonic voltage content %, harmonic current content %, harmonic active power content % (The following parameters can be displayed at data during PC communication but not displayed: Harmonic voltage phase angle, harmonic current phase angle, harmonic voltage current phase difference)
Measurement range (*)	[Voltage] 0.15 V to 1000 V AC/DC [Current] Direct input: 2 mA to 65 A AC/DC For ACDC measurement using the CT9811-11 as an example: 4.8 A to 2000 A AC/DC (typical accuracy ±0.4%) For AC measurement using the CT9811-11 as an example: 10 A to 3000 A AC (typical accuracy ±2.0%)
Integration measurement (Integration up to 100 hours)	Current: 8 digits of displayed digit + 6 digits (from 0.000000 to 9999999), 100 ms/step (integration and sum rate) At the power: 8 digits of displayed digit + 6 digits (from 0.000000 to 9999999), 100 ms/step (integration and sum rate)
Input resistance (2000 kΩ)	[Voltage] 2 MΩ, [Current] 1 mΩ or less (direct input)
Basic accuracy (Active power)	±0.1% rdg ±0.1% F.S. (DC) ±0.1% rdg ±0.05% F.S. (45 Hz to 66 Hz, at Input < 50% F.S.) ±0.15% rdg (45 Hz to 66 Hz, at 50% F.S. < Input)
Display refresh rate	5 times/s to 20 seconds (depends on average times setting)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (0-03 model only)	16 channels (selectable from following): Level output DC ±2 V, Waveform output 1 V F.S. Level output, instantaneous waveform output (voltage, current, active power). Level output (apparent power, reactive power, power factor, or others). High-speed active power level output
Functions	[Ratiometric method] AC/DC, AC+DC Units, AC, DC, FWD, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, or other functions
Interfaces	RS-232C / LAN standard, (-03 model also includes GPIB)
Power supply	100 to 240 V AC, 50/60 Hz, 40 VA max.
Dimensions and mass	305 mm (12.11 in)W × 132 mm (5.16 in)H × 256 mm (10.00 in)D, 5.6 kg (12.4 oz)
Included accessories	Instruction manual x1, Measurement guide x1, Power cord x1

(*1) MIN/MAX current values and accuracy will vary depending on the current sensor used.

Shared options for the POWER METER PW3337, PW3336, and PW3335 series

Accurately Measure Devices Up to 1000 V 65 A AC/DC with Direct Input

POWER METER PW3336



- Compatible with the SPECpower® benchmark for server power consumption
- Measure DC and single-phase 2-wire to 3-phase 3-wire with 2-channel input
- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- High-precision basic accuracy of ±0.1% (*1)
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- High-current measurement up to 65 A of direct input
- Harmonic measurement up to the 50th order according to IEC 61000-4-7
- High-accuracy measurement, even with a low power factor for no-load testing of transformers and motors
- Built-in external sensor input terminals to measure up to 5000 A AC
- Synchronize up to 8 units for multi-unit measurement

Model No. (Order Code) PW3336 (2-ch)
 PW3336-01 (2-ch, built-in GPIB)
 PW3336-02 (2-ch, built-in DA output)
 PW3336-03 (2-ch, built-in GPIB, DA output)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires, single-phase 3-wires, 3-phase 3-wires, (voltage / current measurement range set for each wiring mode)
Measurement items	Voltage, Current, Active power, Apparent power, Reactive power, Power factor, Phase angle, Frequency, Efficiency, Current integration, Active power integration, Integrated time, Voltage waveform peak value, Current waveform peak value, Voltage crest factor, Current crest factor, Time average current, Time average active power, Voltage ripple factor, Current ripple factor
Harmonic parameters	Synchronization frequency range: 10 Hz to 640 Hz, Analysis order up to 50th Harmonic voltage RMS value, Harmonic current RMS value, Harmonic active power, Total harmonic voltage distortion, total harmonic current distortion, Voltage fundamental waveform, Current fundamental waveform, Active power fundamental waveform, Apparent power fundamental waveform, Reactive power fundamental waveform, Power factor fundamental waveform, displacement power factor, Voltage current phase difference fundamental waveform, interchannel voltage fundamental wave phase difference, interchannel current fundamental wave phase difference, Harmonic voltage content %, Harmonic current content %, Harmonic active power content % (The following parameters can be displayed at data during PC communication but not displayed: Harmonic voltage phase angle, Harmonic current phase angle, Harmonic voltage current phase difference)
Measurement range (*)	[Voltage] 0.15 V to 1000 V AC/DC [Current] Direct input: 2 mA to 65 A AC/DC For ACDC measurement using the CT9811-11 as an example: 4.8 A to 2000 A AC/DC (typical accuracy ±0.4%) For AC measurement using the CT9811-11 as an example: 10 A to 3000 A AC (typical accuracy ±2.0%)
Integration measurement (Integration up to 100 hours)	Current: 8 digits of displayed digit + 6 digits (from 0.000000 to 9999999), 100 ms/step (integration and sum rate) At the power: 8 digits of displayed digit + 6 digits (from 0.000000 to 9999999), 100 ms/step (integration and sum rate)
Input resistance (2000 kΩ)	[Voltage] 2 MΩ, [Current] 1 mΩ or less (direct input)
Basic accuracy (Active power)	±0.1% rdg ±0.1% F.S. (DC) ±0.1% rdg ±0.05% F.S. (45 Hz to 66 Hz, at Input < 50% F.S.) ±0.15% rdg (45 Hz to 66 Hz, at 50% F.S. < Input)
Display refresh rate	5 times/s to 20 seconds (depends on average times setting)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (0-03 model only)	16 channels (selectable from following): Level output DC ±2 V, Waveform output 1 V F.S. Level output, instantaneous waveform output (voltage, current, active power). Level output (apparent power, reactive power, power factor, or others). High-speed active power level output
Functions	[Ratiometric method] AC/DC, AC+DC Units, AC, DC, FWD, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, or other functions
Interfaces	RS-232C / LAN standard, (-03 model also includes GPIB)
Power supply	100 to 240 V AC, 50/60 Hz, 40 VA max.
Dimensions and mass	305 mm (12.11 in)W × 132 mm (5.16 in)H × 256 mm (10.00 in)D, 5.6 kg (12.4 oz)
Included accessories	Instruction manual x1, Measurement guide x1, Power cord x1

(*1) MIN/MAX current values and accuracy will vary depending on the current sensor used.

Shared options for the POWER METER PW3337, PW3336, and PW3335 series

Power Meters

Single Phase Power Meter Compatible with DC Measurement and Current/Power Integration Measurement

AC/DC POWER HiTESTER 3334



RS-232C

GP-IB

-21 Model

True RMS



- Compatible with the SPECpower® benchmarking for server power consumption
- DC measurement mode, AC, and AC+DC measurement
- Integration function for current and power
- ±0.1% high basic accuracy (For complete details, please refer to the specifications)
- Extended period of guaranteed accuracy of 3 years
- Complete accuracy over a wide input range

Model No. (Order Code) 3334

3334-01 (Built-in GP-IB)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase/ two-wires
Measurement items	Voltage, Current, Active power, Apparent power, Power factor, Frequency, Integration (current, active power), Waveform peak (voltage and current)
Measurement ranges	[Voltage] AC/DC 15.000/ 30.00/ 150.00/ 300.0 V [Current] AC/DC 300.00/ 300.0 mA, 1.000/ 3.000/ 10.000/ 30.00 A [Power] 1.5000 W to 9.000 kW (combination of voltage and current ranges)
Integration measurement	Current [No. of displayed digits: 6 digits (from 0.0000 mAh), Polarity-independent integration and 2ms value] Integration time up to 10,000 hours
Input resistance (50Ω) Hz	[Voltage] 2.4 MΩ, [Current] 10 mΩ or less (direct input)
Basic accuracy	±0.1% rdg ±0.2% Ls. (DC), ±0.1% rdg ±0.1% Ls. (45 Hz to 66 Hz) <i>Note: Provided accuracy of 1 year, typical value</i>
Display refresh rate	5 times/s
Frequency characteristics	DC, 45 Hz to 5 kHz
Waveform output	Parameter output representation: voltage, current and power (3 simultaneous channels), Output voltage: 1 V DC/Es.
Analog output (D/A output)	Parameter output representation: voltage, current active power and selected 1 item (4 simultaneous channels). Selected 1 item from apparent power, power factor, current integration, active power integration, Output voltage: 4-20 V DC/Es.
Functions	Rectification method switchable between AC+DC (True RMS), DC (single average), AC (True RMS), Wave peak measurement, VT or CT ratio settings, Average function.
Interfaces	RS-232C included as standard, GP-IB (Model 3334-01 only)
Power supply	100 V to 240 V AC, 50/60 Hz, 20 VA max.
Dimensions and mass	230 mm (9.27 in)/W × 100 mm (3.94 in)/H × 245 mm (9.65 in)/D, 2.5 kg (5.51 oz)
Included accessories	Instruction manual ×1, Power cord ×1



Single Phase Power Meter for Production and Inspection Lines

POWER HiTESTER 3333



RS-232C

GP-IB

-21 Model

True RMS



- Ideal for replacing portable instruments, ±0.1% basic accuracy
- Extended period of guaranteed accuracy of 3 years
- 50mA to 20A AC current range (300 V Max., Accuracy guaranteed up to 30 A)
- RS-232C interface

Model No. (Order Code) 3333

3333-01 (Built-in GP-IB)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires
Measurement items	Voltage, Current, Active power, Apparent power, Power factor
Measurement range	[Voltage] 200 V AC (300 V Max.) [Current] 50/200/500 mA, 2/5/20 A AC (30 A Max.) [Power] 10.000 W to 4.000 kW (combination of voltage and current ranges)
Input resistance (50Ω) Hz	[Voltage] 2.4 MΩ, [Current] 7 mΩ or less (direct input)
Basic accuracy	[Guaranteed for 1 year, Voltage, Current, Active power] ±0.1% rdg ±0.1% Ls. (45 Hz to 66 Hz, input current 20 A or less) [Guaranteed for 3 years, Voltage, Current, Active power] ±0.1% rdg ±0.2% Ls. (45 Hz to 66 Hz, input current 20 A or less)
Display refresh rate	5 times/s
Frequency characteristics	45 Hz to 5 kHz
D/A output	3 channels outputs simultaneously for voltage, current, active power +2V DC/Es.
Functions	Scaling (VT, CT ratio settings), Average function
Interfaces	RS-232C standard, GP-IB (Model 3333-01 only)
Power supply	100 to 240 V AC, 50/60 Hz, 20 VA max.
Dimensions and mass	160 mm (6.30 in)/W × 100 mm (3.94 in)/H × 227 mm (9.14 in)/D, 1.9 kg (4.20 oz)
Included accessories	Instruction manual ×1, Power cord ×1



Power Quality Analyzers

Investigate Power Characteristics and Analyze the Causes of Problems

POWER QUALITY ANALYZER PQ3198



Current sensor: Sold separately



- Verify power problems in accordance with the IEC61000-4-30 Class A standard
- High accuracy and continuous gapless recording (V: ±0.1% of nominal voltage, A: ±0.1% rdg ±0.1% f.s., W: ±0.2% rdg ±0.1% f.s.)
- Broadband voltage range lets you measure even high-order harmonic (supraharmonic) components of up to 80 kHz
- Maximum 6000 V peak transient voltage up to 700 kHz
- Measure up to 6000 A AC
- Two systems of power measurement and efficiency calculation for ch1, ch2, ch3 and ch4
- Make simple measurements of inverters with 40 to 70 Hz fundamental frequency and max. 20 kHz carrier frequency
- Easily create reports with bundled PC ONE application software
- Optional GPS BOX for synchronizing multiple devices

Model No. (Order Code): PQ3198 (Main unit, current sensor is sold separately)

Note: An optional current sensor is necessary to measure current or power parameters. Select from Value Kits for added savings.

POWER QUALITY ANALYZER PQ3198 VALUE KITS:

Model No. (Order Code): (None)

PQ3198-92 (Kit includes 600 A sensor + 4 and other options)

Kit contents: Main unit, AC Current sensor CT7136 (600 A) × 4, Patch Cord LU02-02 × 3, Carrying Case C1009

PQ3198-94 (Kit includes 6000 A sensor + 4 and other options)

Kit contents: Main unit, AC Current sensor CT7145 (6000 A) × 4, Patch Cord LU02-02 × 3, Carrying Case C1009

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Single-phase 2-wire, Single-phase 3-wire, Three-phase 3-wire or Three-phase 4-wire plus one extra input channel for voltage/current, all class II AC/DC measurement
Voltage ranges	Voltage measurement: 600.0 V rms ± DC, Transient measurement: 6.000 kV peak
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use)
Power ranges	300.00 W to 3.0000 MW (measured automatically based on voltage and current range in use)
Basic accuracy	Voltage: ±0.1% of nominal voltage Current: ±0.1% rdg ±0.1% f.s. + current sensor accuracy Active power: ±0.2% rdg ±0.1% f.s. + current sensor accuracy

Measurement items	1. Transient voltage: 2 MHz sampling 2. Frequency cycle: Calculated as one cycle, 40 to 70 Hz 3. Voltage (1Q) RMS: one cycle calculation refreshed every half cycle 4. Current (1Q) RMS: half-cycle calculation 5. Voltage swell, Voltage dips, Voltage interruption 6. Inrush current 7. Voltage waveform comparison 8. Instantaneous flicker value, As per IEC61000-4-15 9. 10 ms frequency: Calculated as the whole-cycle time during the specified 10 s period, 40 to 70 Hz 10. Voltage waveform peak, Current waveform peak 11. Voltage, Current, Active power, Apparent power, Reactive power, Active energy, Reactive energy, Power factor, Displacement power factor, Voltage unbalance factor, Current unbalance factor, and efficiency 12. High-order harmonic (supraharmonic) component (voltage/current): 2 kHz to 80 kHz 13. Harmonic/Harmonic phase angle (voltage/current), Harmonic power: 0th to 50th orders 14. Harmonic voltage-current phase angle: 1st to 50th orders 15. Total harmonic distortion factor (voltage/current) 16. Inter-harmonic (voltage/current): 0.5 th to 49.5 th orders 17. K Factor (multiplication factor) 18. IEC flicker, Δ V10 Flicker 19. Main signaling voltage
Record	Repeated ON 1 year, Maximum recording event: 9999 × 365 days (up to 9999 events per day) Repeated off: 25 days, maximum recording event: 9999 events
Interfaces	SD/SDHC memory card, LAN (HTTP server function / FTP function), USB2.0 (for communication)
Display	6.5-inch TFT color LCD (640 × 480 dots)
Power supply	AC adapter Z1002 (0.00 V to 240 V AC, 50/60 Hz, rated current 1.7 A), Battery Pack Z1003 (Continuous use: 10 hours, Charging time: Max. 5 h to 30 m with AC adapter)
Dimensions and mass	360 mm (11.81 in)W × 281 mm (8.31 in)H × 68 mm (2.68 in)D, 2.6 kg (5.7 oz) (including Battery Pack Z1003)
Included accessories	Instruction manual × 1, Measurement guide × 1, Voltage Card LU009 × 1 set (Red/Blue/Orange each 1, Black 4, 3m (9.84ft) length, Alligator clip × 8), Color clip × 1, Color dip × 1, AC Adapter Z1002 × 1, Strap × 1, USB cable × 1, 3.28 ft (1m) × 1, Battery pack Z1003 × 1, SD Memory Card 2GB Z4000 × 1, Application software (PC ONE) × 1

Quick and Simple Power Quality Testing, Record and Analyze Power Supply Issues with a Single Instrument

POWER QUALITY ANALYZER PQ3100



- Record data including voltage, current, power, harmonics, and flicker simultaneously along a single time axis
- Measure up to 6000 A AC
- Capture all power anomalies including instantaneous outages, voltage drops, and frequency fluctuations, while simultaneously recording trend data
- Quick Start: Easy-to-understand on-screen guide for measurement procedures
- Bundled PC ONE application software makes it easy to create reports
- Record waveforms for up to 1 second before and 10 seconds after an anomaly occurs
- Accurately measure DC currents over extended periods of time (with an ADC auto-zero function)
- Directly supply power to connected current sensors
- Send measured values to HIOKI dataloggers using a Bluetooth® wireless technology compatible adapter (LR4840 Link-compatible products) Ver. 2.0 and later

Model No. (Order Code): PQ3100 (Main unit, clamp sensor is sold separately)

Note: An optional current sensor is necessary to measure current or power parameters. Select from Value Kits for added savings.

POWER QUALITY ANALYZER PQ3100 VALUE KITS:

Model No. (Order Code): (None)

PQ3100-91 (Kit includes 600 A sensor + 2 and other options)

Kit contents: AC Current sensor CT7136 (600 A) × 2, PQ3100 main unit, SD Memory card Z4000, Carrying case C1009

PQ3100-92 (Kit includes 6000 A sensor + 4 and other options)

Kit contents: AC Current sensor CT7136 (600 A) × 4, PQ3100 main unit, SD Memory card Z4000, Carrying case C1009

PQ3100-94 (Kit includes 6000 A sensor + 4 and other options)

Kit contents: AC flexible current sensor CT7045 (6000 A) × 4, PQ3100 main unit, SD Memory card Z4000, Carrying case C1009

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Single-phase 2-wire, Single-phase 3-wire, Three-phase 3-wire or Three-phase 4-wire plus one extra input channel CT14 for voltage/current, all class II AC/DC measurement
Voltage ranges	Voltage measurement: 1000.0 V rms ± DC, Transient measurement: 2.000 kV peak
Current ranges	50.000 mA AC to 5.0000 kA AC, 10.000 A DC to 2.0000 kA DC (depends on current sensor in use)
Power ranges	300.00 W to 6.0000 MW (measured automatically based on current range in use)
Basic accuracy	Voltage: ±0.2% of nominal voltage, Current: ±0.1% rdg ±0.1% f.s. + current sensor accuracy, Active power: DC: ±0.5% rdg ±0.5% f.s. + current sensor accuracy, AC: ±0.2% rdg ±0.1% f.s. + current sensor accuracy

Measurement items	1. Instantaneous voltage: 200 kHz sampling 2. Frequency cycle: Calculated as one cycle 3. Voltage (1Q) RMS: one cycle calculation refreshed every half cycle 4. Voltage swell, Voltage dips, Voltage interruption, IVC (Ver. up): Voltage (VQ) RMS calculation 5. Inrush current: half-cycle calculation: Calculated as the current RMS value for current waveform data sampled every half-cycle 6. Frequency 200 ms: Calculated as 10 or 12 cycles 7. 10-ms frequency: Calculated as the whole-cycle time during the specified 10 s period 8. Voltage waveform peak, Current waveform peak 9. Voltage, Current, Active power, Apparent power, Reactive power, Active energy, Reactive energy, Power factor, Displacement power factor, Voltage unbalance factor, Current unbalance factor 10. Voltage over voltage: 200 kHz sampling 11. Harmonic/Harmonic phase angle (voltage/current), Harmonic power: 0th to 50th orders 12. Harmonic voltage-current phase angle: 1st to 50th orders 13. Total harmonic distortion factor (voltage/current) 14. Inter-harmonic (voltage/current): 0.5 th to 49.5 th orders 15. K Factor (multiplication factor) 16. IEC Flicker, Δ V10 Flicker
Record	Maximum recording interval: 1 year, Maximum number of recordable events: 9999 × 365 days
Interfaces	SD/SDHC memory card, RS-232C (for communication/USB400 link), LAN (HTTP server/FTP/Email), USB 2.0 (for communication)
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter (Supported devices: HIOKI LR4840 Link-compatible logger), Ver. 2.0 and later
Display	6.5-inch TFT color LCD (640 × 480 dots)
Power supply	AC adapter Z1002 (0.00 V to 240 V AC, 50/60 Hz, rated current 1.7 A), Battery pack Z1003 (Continuous use: 8 h, Charging time: Max. 5 h to 30 m with AC adapter)
Dimensions and mass	360 mm (11.81 in)W × 281 mm (8.31 in)H × 68 mm (2.68 in)D, 2.6 kg (5.7 oz) (including battery pack Z1003)
Included accessories	Instruction manual × 1, Measurement guide × 1, Voltage Card LU009 × 1 set (Red/Blue/Orange each 1, Black 4, 3m (9.84ft) length, Alligator clip × 8), Color clip × 1, Color dip × 1, AC Adapter Z1002 × 1, Strap × 1, USB cable × 1, 3.28 ft (1m) × 1, Battery pack Z1003 × 1, SD Memory Card 2GB Z4000 × 1, Application software (PC ONE) × 1

Power Quality Analyzers

Shared options for the PQ3198 / PQ3100

Current probe	AC CURRENT SENSOR CT7126 400 A AC, $\pm 1\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC CURRENT SENSOR CT7131 1000 A AC, $\pm 1\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC CURRENT SENSOR CT7136 400 A AC, $\pm 1\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC FLEXIBLE CURRENT SENSOR CT7044 4000 A AC, $\pm 0.5\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC FLEXIBLE CURRENT SENSOR CT7045 4000 A AC, $\pm 0.5\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC LEAKAGE CURRENT SENSOR CT7116 6 A AC, $\pm 0.5\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length		
AC/DC current probe	AC/DC AUTO-ZERO CURRENT SENSOR CT7734 300 A AC/DC, $\pm 1\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC/DC AUTO-ZERO CURRENT SENSOR CT7736 600 A AC/DC, $\pm 1\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	AC/DC AUTO-ZERO CURRENT SENSOR CT7742 2000 A AC/DC, $\pm 1\%$ mm 0.5 ft, 2.5 m $\pm 20\%$ cord length	EXTENSION CABLE L0220-01 3 m 0.36 ft length	EXTENSION CABLE L0220-02 3 m 0.4 ft length	EXTENSION CABLE L0220-03 10 m 0.21 ft length		
For PQ3100 only For PQ3100 only For PQ3100 only	VOLTAGE CORD L1000-05 Red/Yellow/Blue/Grey/black, 1.3 m ± 0.4 ft length, Alligator clip x 5	VOLTAGE CORD L1000 Red/Yellow/Blue/Grey/black, 1.3 m ± 0.4 ft length, Alligator clip x 4	WIRING ADAPTER PW9000 When three-phase 3-wire (PW9000) connection, the voltage cord to be connected can be reduced from 4 to 1	WIRING ADAPTER PW9001 When three-phase 4-wire (PW901) connection, the voltage cord to be connected can be reduced from 4 to 1	PATCH CORD L1021-01 Branched branch, Red, 1.3 m, Cable length 0.1 m, For branching from the LP300 series or L3000 series, CATV 600 V, CAT III 1000 V	PATCH CORD L1021-02 Branched branch, Black, 1.3 m, Cable length 0.1 m, For branching from the LP300 series or L3000 series, CATV 600 V, CAT III 1000 V		
Shared options for the PQ3100 / PQ3100	GRABBER CLIP L9040 Attaches to the top of the measuring cable, Red/Black 1 each, 90 mm (3.5 in) length, CATIII 1000 V	MAGNETIC ADAPTER 9804-01 Attaches to the top of cord, red/c, $\pm 1\%$ mm 0.4 ft	MAGNETIC ADAPTER 9804-02 Attaches to the top of cord, black/c, $\pm 1\%$ mm 0.4 ft	POWER ADAPTER Z1002 For main unit, 100 to 240 V AC	BATTERY PACK Z1000 NiMH, Charges while connected to the main unit.	LAN CABLE 9642 Straight Ethernet cable, supplied with straight-to-round conversion adapter, 3 m (10 ft) length	CONVERSION CABLE L9910 Used to connect the current sensors with BNC terminal to RJ45 terminal (example the PQ3100)	
Shared options for the PQ3100 / PQ3100	CONNECT ONE SF4000 Application for Windows	RS-232C CABLE 9637 For the PC, 9 pin - 9 pin, 1.3 m (4.3 ft) length	MAGNETIC STRAP Z5020 Heavy-duty	MAGNETIC STRAP Z5004 Heavy-duty	CARRYING CASE C1002 Hand truck type, includes compartments for options	CARRYING CASE C1009 Bag-type, includes compartments for options	WATERPROOF BOX For outdoor installations, IP65 compliant, Certified built for a question	GPS BOX PW9005 To synchronize the PQ3100 / PW9010 clock to UTC

Eliminate the Risk of Short-Circuits and Electrical Accidents

CLAMP ON POWER LOGGER PW3365



* Current sensor: sold separately
* Voltage sensor: bundled

- Voltage measurement from the top of the cable, zero risk of short circuit
- Supports single to three-phase, 4-wire circuits
- Measure between 90V to 520V
- Display harmonics up to the 13th order
- Slim, compact design that can be placed anywhere
- Store months of data on SD cards
- The QUICK SET function guides you in making the right connections

Model No. (Order Code): PW3365-20 (English model, main unit only)

Note: Clamp On Power Logger PW3365-20 by itself does not support current and power measurements. Current and power measurements require clamp on sensors, sold separately. Use only HIKOZI SD cards guaranteed to work for saving measurement data (options, sold separately).

■ SAFETY VOLTAGE SENSOR PW9020 Specifications

Compatible conductor types	Insulated wires*, in dose PVC or metal parts *Shielded wires cannot be measured. The product may not be able to accurately measure multi-core cables or cables that have thick insulation.
Compatible conductor diameters	Finished outer diameter \varnothing 6 mm to \varnothing 30 mm
Effective measurement range	90 V rms to 520 V rms
Cord length	3 m (9.84 ft)



* For PW3365

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement line & number of circuits	50/60 Hz, Single phase 2 wires (1/20 circuit), Single phase 3 wires (1 circuit), Three phases 3 wires (1 circuit), Three phases 4 wires (1 circuit). Current only: 1 to 3 channels
Measurement items	Voltage RMS, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (f), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power, apparent power, power factor (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration), reactive energy (lag, lead), energy cost display, active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand
Harmonic	Harmonic voltage, harmonic current, voltage total harmonic distortion (THD-F or THD-R), current total harmonic distortion (THD-F or THD-R), up to 13th order
Voltage ranges	-400 V AC (Effective measurement range: 90.0 V to 520.0 V)
Current ranges	500.00 mA to 50.000 A AC (depends on current sensor in use), 50.000 mA to 50.000 A AC (Leak clamp on sensor only)
Power ranges	20.00 W to 6.000 MW (depends on voltage/current combination and measured line type)
Basic accuracy	Voltage: $\pm 1.5\%$ rdg $\pm 0.2\%$ f.s. (calculated accuracy with PW3365-20 + PW9020) Current: $\pm 0.3\%$ rdg $\pm 0.2\%$ f.s. + clamp sensor accuracy Active power: $\pm 0.5\%$ rdg $\pm 0.2\%$ f.s. + clamp sensor accuracy (at power factor = 1)
Display update rate	0.5 sec (single line) or using SD card or internal memory, or during LAN/USB communication
Save destination	SD/MMC Memory card, or internal memory at real time
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
Save items	Measurement value save: Average only / Average, Maximum, Minimum value Screen copy: BMP files (saved every 5 min. at minimum interval time) Waveform save: Binary waveform data
Interfaces	SD/MMC memory card, LAN 100 BASE-TX, HTTP server function, remote settings via communication program, file download, USB 2.0. When connected to a PC the SD Card and internal memory are recognized as removable storage devices, remote settings via communication program, data download
Functions	Connection check, Quick Set navigation guide, clock
Power supply	AC adapter Z1008: 100 to 240 V AC, 50/60 Hz, 45 VA (including AC adapter) Battery pack BPR-0012/12, 1.3 Ah, charging time 10 h, 3 hours of continuous use (without PW9020) 100 mm (3.94 in) \times 100 mm (3.94 in) \times 46 mm (1.81 in), 540 g (1.19 lb) without PW9020 100 mm (3.94 in) \times 100 mm (3.94 in) \times 66 mm (2.64 in), 620 g (1.39 lb) with PW9020
Included accessories	Safety Voltage Sensors PW9020 x 1 set, AC adapter Z1008 x 1, USB cable x 1, Instruction manual x 1, Measurement guide x 1, Color clip (red, yellow, blue and white each 4), Spiral tubes in black (used handling for current sensors and voltage sensors) x 10

Clamp-on Power Meters

Identify Your Power Condition to Reveal Energy Saving Ideas

CLAMP ON POWER LOGGER PW3360



Current sensors: Sold separately



- Supports single to three-phase, 4-wire circuits
- Measure between 90V to 780V
- Simultaneously measure up to three single-phase, 2-wire circuits (in the same power system)
- Slim, compact design that can be placed anywhere
- Store months of data on SD cards
- The QUICK SET function guides you in making the right connections
- Choose PW3360-21 for harmonic measurements up to the 40th order

Model No. (Order Code) PW3360-20 (English model, main unit only)
PW3360-21 (English model, with harmonic analysis function)

Note: At least one optional current sensor is necessary to measure current or power parameters. To store measurement data, use only the guaranteed SD cards sold by HIOKI.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement line & number of circuits	50/60 Hz, Single phase 2 wires (1/2U circuit), Single phase 3 wires (1 circuit), Three phases 3 wires (1 circuit), Three phases 4 wires (1 circuit), Current only: 1 to 3 channels
Voltage range	Voltage PW3360, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (Hz), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power (with logarithmic display), apparent power, power factor (with logarithmic display) or displacement power factor (with logarithmic display), active energy (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand, power input, [PW3360-21 only]: Harmonic voltage level, harmonic current level, harmonic power level, content percentage, phase angle, total harmonic distortion (THD-F or THD-P), up to 40th order
Measurement items	
Voltage ranges	600 V AC (250Vrms to maximum range: 90-780 V)
Current ranges	500.00 mA to 50000 A AC (depends on current sensor type), 50.000 mA to 5.000 A AC (Leak clamp on sensor only)
Power ranges	300.00 W to 90000 MW (depends on voltage/current combination and measured line type)
Basic accuracy	Voltage: ±0.2% rdg ±0.2% Es + clamp sensor accuracy Current: ±0.2% rdg ±0.2% Es + clamp sensor accuracy (at power factor = 1)
Display update rate	0.5 sec (except when using SD card or internal memory, or during LAN/USB communication)
Save destination	SD Memory card, or internal memory at real time
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 16 selections
Save items	Measurement value ave, Average only / Average, Max/Min. value, [PW3360-21 only]: Harmonic data ave, Average only / average, maximum value in binary format, Screen copy BMP file (resolution 5 mm x minimum interval line), Waveform save, Trace waveform function
Interfaces	SD/SDHC memory card, LAN 10BASE-T/A, HTTP server function, USB 2.0: When connected to a PC, the SD Card and internal memory are recognized as removable storage devices, remote setting via communication program, data download, Pulse output proportional to active power consumption when measuring integral power consumption, Isolated open-collector signal
Functions	Connection check, Quick Set navigation guide, clock, pulse input
Power supply	AC adapter Z1006 (100 to 240 V AC, 50/60 Hz, 40VA (including AC adapter), Battery pack set (DC 7.2V, 3700 mAh, charging time 8 hr 10 min), 13 hours of continuous use (with backlight off))
Dimensions and mass	180 mm (7.09 in)W x 100 mm (3.94 in)H x 48 mm (1.88 in)D, 550 g (9.4 oz) without PW3360, 180 mm (7.09 in)W x 100 mm (3.94 in)H x 67.2 mm (2.65 in)D, 830 g (18.5 oz) with PW3360
Included accessories	Voltage cord L9408-01 x 1 set, AC adapter Z1006 x 1, USB cable x 1, Instruction manual x 1, Measurement guide x 1, Color clip x 1 set red, yellow, blue, white two each, for color-coding clamp sensors, Spiral tube for grouping clamp sensor cords x 5, Application Software CD (SW4000 (ENGLISH Only)) x 1

Shared options for PW3360, PW3365

MAGNETIC ADAPTER 9804-01 Black/Red/Yellow/Blue, 3m (9.84 ft) length, Alligator clip -4	MAGNETIC ADAPTER 9804-02 Attached to the tip of cord, Red/Blue, 9.1mm	PATCH CORD L1021-01 Bimetal branch-busbar, Red: L, Cable length: 10.0 m, For branching from the L9408 series or L9400 series, CAT: 1T 600 V, CATIV 600 V	PATCH CORD L1021-02 Bimetal branch-busbar, Black: L, Cable length: 11.0 m, For branching from the L9408 series or L9400 series, CATIV 600 V, CATIV 600 V	SD CARD PREPARATION The only HD Card used by HIOKI. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.
SAFETY VOLTAGE SENSOR PW9302 For PW3365, 1m (3.28 ft) length	BATTERY SET PW9302 Battery case and battery Pack 9459-01	BATTERY PACK 9459 NMH, Chargeable installed in the main unit	AC ADAPTER Z1006 100 to 240 V AC	VOLTAGE LINE POWER ADAPTER PW9003 For PW3365, voltage power from measurement line, up to 240V AC
CARRYING CASE CT005 For PW3365/3360 series, for storing options	MAGNETIC STRAP Z5004	CARRYING CASE C1008 For PW3365 series, for storing Options, 10 pieces	POWER LOGGER VIEWER SP1001 Easy graphical processing of measurement data saved with the PW3360/3365 series, 300 hours on a PC	CONNECT ONE SF-4000 Application for Windows
LAN CABLE 9542 Straight Ethernet cable, required with a length of over 10 meters, 1m (3.28 ft) length	AC ADAPTER Z1008 100 to 240 V AC			

Shared optional current sensors for PW3360, PW3365, and the 3169 (also available for old products the 3197, and the 3198)

For power or load current measurement (1 sensor necessary for single-phase measurements, and 2 or 3 sensors required for 3-phase measurements)

CLAMP-ON SENSOR 9804 5A AC rated current, ±15 mm (0.39 in) core dia., 3m (9.84 ft) length	CLAMP-ON SENSOR 9805 100A AC rated current, ±17 mm (0.37 in) core dia., 3m (9.84 ft) length	CLAMP-ON SENSOR 9806 300A AC rated current, ±18 mm (0.71 in) core dia., 3m (9.84 ft) length	FLEXIBLE CLAMP-ON SENSOR 9807 (1U/2A/3B) 500/1000 A AC rated current, ±18 mm (0.71 in) core dia., 3m (9.84 ft) length	CLAMP-ON SENSOR 9808 1000A AC rated current, ±19 mm (0.75 in) core dia., 3m (9.84 ft) length	CLAMP-ON SENSOR 9809 500A AC rated current, ±17 mm (0.37 in) core dia., Required the Connection cord 9219	CLAMP-ON SENSOR 9810 500A AC rated current, ±15 mm (0.39 in) core dia., Required the Connection cord 9219	CONNECTION CORD 9219 Required with the 9807/9808/9809
CLAMP-ON LEAK SENSOR 9857 10A AC rated current, ±30 mm (1.18 in) core dia., 3m (9.84 ft) length	CLAMP-ON LEAK SENSOR 9857-10 100A AC rated current, ±40 mm (1.57 in) core dia., 3m (9.84 ft) length					CLAMP-ON ADAPTER SE9810 CT for 100A AC, secondary current 1.0A of primary	

Shared options for PW3360, PW3365, and the 3197

For leak current measurement (not capable of power measurement)

*Up to 5 A when using with power meter

CLAMP-ON LEAK SENSOR 9857 10A AC rated current, ±30 mm (1.18 in) core dia., 3m (9.84 ft) length	CLAMP-ON LEAK SENSOR 9857-10 100A AC rated current, ±40 mm (1.57 in) core dia., 3m (9.84 ft) length
--	--

Clamp-on Power Meters

Quickly Check Current, Voltage, Power, and Power Factor

AC CLAMP POWER METER CM3286-50



- Display four parameters simultaneously
 - A handheld power meter that measures from 5 W of power and 60 mA of current
 - Measure power ranging from 5 W at a low current of 60 mA to 380 kW
 - In addition to current, voltage, and power, measure simple integral power consumption and phase sequence
 - Features and functions deliver fast and efficient testing
 - Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file (Wireless Adapter Z3210 is necessary)
 - Harmonic analysis from 1st to 30th order with GENNECT Cross (Wireless Adapter Z3210 is necessary)

Model No. (Order Code) CM32286-50 (Wireless Adapter Z3210 not included)
CM32286-90 (Included with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)	
Measurement line	Single-phase, Three-phase (balanced with no distortion)
Measurement items	Voltage, Current, Voltage current peak, Active reactive apparent power, Power factor, Phase angle $^{\circ}$, Frequency, Single Active Energy Consumption (single-phase) [With Z3310 installed (*2)] Voltage current harmonics
AC voltage range	[Measurement range] 90.0 V to 600.0 V, Single range, Basic accuracy 45 - 66 Hz ±0.7% rdg ±3 digit (Frequency characteristics: 45 - 1 kHz, True RMS)
AC current range	[Measurement range] 0.000 A to 600.0 A, 3 ranges, Basic accuracy: ±1.0% rdg ±3 digit (Frequency characteristics: 45 - 1 kHz, True RMS)
Power range	[Single phase] 0.005 kW to 360.0 kW Basic accuracy: ±2.0% rdg ±7 digit (50/60 Hz, Power factor=1) [Balanced three-phase 2-wire] 0.020 kW to 623.5 kW Basic accuracy: ±3.0% rdg ±10 digit (50/60 Hz, Power factor=1) [Balanced three-phase 4-wire] 0.040 kW to 1080 kW Basic accuracy: ±2.0% rdg ±3 digit (50/60 Hz, Power factor=1)
Harmonic levels	[With Z3310 installed (*2)] Voltage/ current harmonic levels up to 30th, Content factor, Total harmonic distortion ratio
Other functions	[Phase angle (*3)] real -180.0 $^{\circ}$ to lag 179.9 $^{\circ}$, [Power factor] 1.000 to 1.000 [Frequency] 45.0 Hz to 99.9 Hz, PEAK, Data detection, Max / Min / Avg value display, Auto hold, electric meter comparison, unbalanced 3-phase power estimate display, etc.
Dustproof and waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closed) IP50 (While in storage)
Power supply	LR03 Alkaline battery *2, Continuous use: approx. 25 hr (without Z3310 installed), approx. 18 hr. (with Z3310 installed and using wireless communications) Other conditions: 100 A AC measurement, back light off, 23°C reference value
Core jaw dia	Ø 46 mm (1.81 in.), Jaw dimensions: 92 mm (3.62 in.) W × 28 mm (1.18 in.) D mm
Dimensions and mass	65 mm (2.56in.) W × 241 mm (9.49in.) H × 25 mm (1.38in.) D, 450 g (15.9 oz)
Included accessories	Connection Cord L19.57 *1, LR03 Alkaline battery *2, Carrying Case C0203 *1, Instruction Manual *2, Operating Precautions *1

4.2 Please provide information from your review of current legislation

*2) Movement can be displayed without the use of CONNECT One



Capture Inrush, Micro and High-Speed Currents with a Single Probe

CURRENT PROBE CT6710, CT6711



- 3 ranges in a single probe - 30 A, 5 A, 0.5 A. Observe a wide current range from micro currents to 30 A.
- Wide band: [CT6710] DC to 50 MHz (-3 dB), [CT6711] DC to 120 MHz (-3 dB)
- High S/N ratio and 10 times output rate: Observe waveforms at 100 μA/div of oscilloscope maximum voltage sensitivity setting of 1 mV/div
- Directly connect to an oscilloscope's BNC input terminal¹⁾


¹⁾: Connecting the probe's metal BNC terminal to a Memory Hi Corder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.

Model No. (Order Code) CT6710 (From 200 μA, 50MHz bandwidth)
CT6711 (From 200 μA, 120MHz bandwidth)

Note: If power cannot be supplied from the Memory Hi Corder, an optional power supply 3269 is required. Please pay attention to offset drift during continuous long-term measurement.


■ (Typical characteristics example)

CT6710 Frequency response

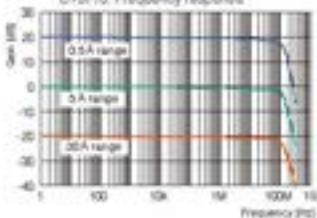

■ (Typical characteristics example)

CT6711 Frequency response

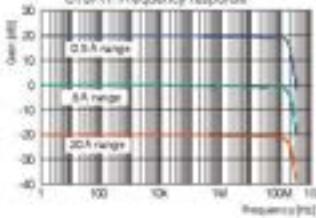

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6710	CT6711
Frequency bandwidth	DC to 50 MHz (-3 dB)	DC to 120 MHz (-3 dB)
Rise time	7.0 ns or shorter	2.9 ns or shorter
Delay time (Typical)	30 A range: 12 ns, 5 A range: 12 ns, 0.5 A range: 13 ns (Delay time relative to rising waveform of input signal 1 ns)	
Noise level	75 μA rms max (at 0.5 A range, using 20 MHz band measuring instrument)	
Max. rated current	30 A range: 30 A rms, 5 A range: 5 A rms, 0.5 A range: 0.5 A rms (DC, and sine wave, requires derating at frequency)	
Max. allowable peak current	30 A range: ±30 A peak (within the input limit time 2 s) 5 A range: ±7.5 A peak, 0.5 A range: ±0.75 A peak (< 10 MHz), ±0.3 A peak (> 10 MHz)	
Amplitude accuracy	30 A range: ±3.0% rdg ±1 mV, (Typical) ±1.0% rdg ±1 mV (≤ 10 Arms, DC, 45 to 66 Hz sine wave, within the maximum peak current of each range) 5 A range: ±3.0% rdg ±1 mV, (Typical) ±1.0% rdg ±1 mV (DC, 45 to 66 Hz sine wave, within the maximum peak current of each range) 0.5 A range: ±3.0% rdg ±10 mV, (Typical) ±1.0% rdg ±10 mV (DC, 45 to 66 Hz sine wave, within the maximum peak current of each range)	
Output rate	30 A range: 0.1 VA, 5 A range: 1 VA, 0.5 A range: 0.1 VA (The output of this probe is internally terminated)	
Measurable conductors	Φ 5 mm (Ø 20 in), Insulated conductor	
Power supply	Supplied from Power Supply 3269, Probe Power Unit Z5021	
Cable length	Sensor cable (between relay box and sensor): 1.5 m (4.92 ft) Power cable: 1.0 m (3.28 ft) (Power plug FFA.05.304.CLA.C37Y / LEMO inc.)	
Dimensions and mass	Sensor: 155 mm (6.10 in)W × 18 mm (0.71 in)H × 26 mm (1.02 in)D, Terminator: 29 mm (1.14 in)W × 83 mm (3.27 in)H × 40 mm (1.57 in)D mm, Mass: 250 g (0.55 lb). Sensor cable BNC terminal: 1.5 m (4.92 ft), Power cable: 1 m (3.28 ft), Power plug: FFA.05.304.CLA.C37Y / LEMO inc.	
Included accessories	Instruction manual >1, Carrying case >1	



POWER SUPPLY 3269
Power 2 × CT6710 series or 4 × CT6700, 3270 series, 100 to 240 VAC



PROBE POWER UNIT Z5021
Specify upon order of the MTR600, power max. 4 × CT6700 series, or max. 8 × other probes

Clearly Observe Even 1 mA Waveforms

CURRENT PROBE CT6700, CT6701



- Wide band: [CT6700] DC to 50 MHz (-3 dB), [CT6701] DC to 120 MHz (-3 dB)
- High S/N characteristic ideal for ultra low 1 mA order current waveforms
- Connect directly to an oscilloscope's BNC input terminal¹⁾


¹⁾: Connecting the probe's metal BNC terminal to a Memory Hi Corder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.

Model No. (Order Code) CT6700 (From 1 mA, 50MHz bandwidth)
CT6701 (From 1 mA, 120MHz bandwidth)

Note: Use optional Power Supply 3269 or 3272 to drive the current probe when power from the Memory Hi Corder or oscilloscope is not available.
Exercise care concerning offset drift when performing continuous measurement over extended periods of time.


■ (Typical characteristics example)

CT6700 Frequency response

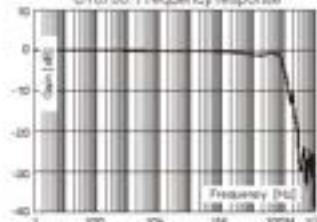

■ (Typical characteristics example)

CT6701 Frequency response

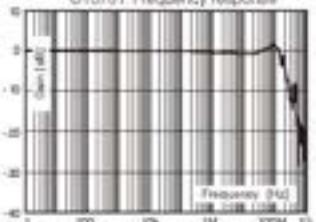

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6700	CT6701
Frequency bandwidth	DC to 50 MHz (-3 dB)	DC to 120 MHz (-3 dB)
Rise time	7.0 ns or shorter	2.9 ns or shorter
Noise level	60 μA rms typical, 75 μA rms max (for 30 MHz band measuring instrument)	
Continuous allowable input	5 A rms (DC, and sine wave, requires derating at frequency)	
Max. allowable peak input	±7.5 A peak (non-continuous)	
Amplitude accuracy	Typ.: ±2% rdg ±1 mV (DC, 45 to 66 Hz sine wave, 0 to 5 Arms) Guaranteed: ±3% rdg ±1 mV (DC, 45 to 66 Hz sine wave, 0 to 5 Arms)	
Output rate	1 V/A (The output of this probe is internally terminated)	
Measurable conductors	Insulated conductor	
Core diameter	Φ 5 mm (Ø 20 in)	
Power supply	±12 V ±0.5 V, 3.2 VA	
Dimensions and mass	Sensor: 155 mm (6.10 in)W × 18 mm (0.71 in)H × 26 mm (1.02 in)D, Terminator: 29 mm (1.14 in)W × 83 mm (3.27 in)H × 40 mm (1.57 in)D mm, Mass: 250 g (0.55 lb). Sensor cable BNC terminal: 1.5 m (4.92 ft), Power cable: 1 m (3.28 ft), Power plug: FFA.05.304.CLA.C37Y / LEMO inc.	
Included accessories	Instruction manual >1, Carrying case >1	



POWER SUPPLY 3269
Power 2 × CT6710 series or 4 × CT6700, 3270 series, 100 to 240 VAC



POWER SUPPLY 3272
Power 1 × CT6700, 3270 series, 120/220/240 V AC, specify when ordering

Current Probes (High sensitivity, Wide bandwidth)

Connect to a voltage input device with a high impedance of at least 1 MΩ.

Wide-Band Current Probe Allows Direct Input to Oscilloscope

CLAMP ON PROBE 3273-50, 3274, 3275, 3276




- Waveform observation across a wide band from DC to MHz
- Connects directly to oscilloscope or Memory HiCorder BNC input terminal
- High S/N characteristics enable the measurement of 10 mA direct current waveforms (3273-50, 3276)

*! Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.

Model No. (Order Code)	3273-50	(DC to 50 MHz, 30 Arms)
	3274	(DC to 10 MHz, 150 Arms)
	3275	(DC to 2 MHz, 500 Arms)
	3276	(DC to 100 MHz, 30 Arms)

■ Frequency response (Characteristics Example)

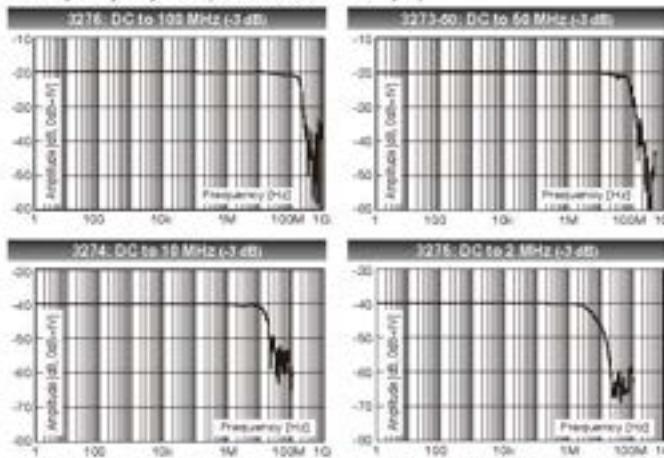


Note: Use the Power Supply 3269/3272 for general measurements or when power is not available from the Memory HiCorder. When performing continuous measurements, be aware of offset voltage drift.



POWER SUPPLY 3269
Rack 1 • CT6700 series or F+
CT6700, 100 mm, 100 A to 10 A
TAC

POWER SUPPLY 3272
Rack 1 • CT6700, 200 mm,
100-200-240 V AC, specify
when ordering

When using the High-speed Analog Unit L9976
(Frequency range: DC to 30 MHz)



Z5021
PROBE POWER UNIT
Connect up to four CT6710/CT6711 probes.

Connecting Wideband Sensors to Other Devices

Below are the options necessary for connecting wide-bandwidth sensors to measurement devices.

Current sensor model No.	POWER ANALYZER PW6001	MEMORY HICORDER Oscilloscope
3273-50 3274 3275 3276 CT6700 CT6701	- Direct connection possible - Power by the PW6001	- Dedicated extension cable (synthetic resin BNC or metal BNC conversion cable) is recommended. - POWER SUPPLY 3269 or 3272 is required. - When using a recorder, the PROBE POWER UNIT Z5021 is also available.
CT6710 CT6711	-	When using a recorder, the Probe Power Unit Z5021 supports the use of up to 4 sensors.

■ Basic specifications (Accuracy guaranteed for 1 year)

	3276	3273-50	3274	3275
Frequency bandwidth	DC to 100 MHz (-3 dB)	DC to 50 MHz (-3 dB)	DC to 10 MHz (-3 dB)	DC to 2 MHz (-3 dB)
Rise time	3.5 ns or shorter	7 ns or shorter	35 ns or shorter	175 ns or shorter
Noise level	2.5 mA rms max. (bandwidth limited to 20 MHz)	2.5 mA rms max. (bandwidth limited to 20 MHz)	25 mA rms max. (bandwidth limited to 20 MHz)	25 mA rms max. (bandwidth limited to 20 MHz)
Continuous allowable input	30 A rms (requires derating at frequency)	150 A rms (requires derating at frequency)	300 A rms (requires derating at frequency)	300 A rms (requires derating at frequency)
Max. allowable peak input	50 A peak (non continuous)	300 A peak (non continuous)	300 A peak (pulse width: 10 µs or shorter)	300 A peak (non continuous)
Amplitude accuracy (0.001-1000 times the measuring and zero-adjusted)	±1.0% rdg, ±1 mV Es. (DC, 45 to 66 Hz, 0 to 30 Arms) ±2.1%rdg (DC, 45 to 66 Hz, 30 A rms to 50 A peak)	±1.0% rdg, ±1 mV Es. (DC, 45 to 66 Hz, 0 to 100 Arms) ±2.3%rdg (DC, 45 to 66 Hz, 10 A rms to 200 A peak)	±1.0% rdg, ±1 mV Es. (DC, 45 to 66 Hz, 0 to 500 Arms) ±2.3%rdg (DC, 45 to 66 Hz, 50 A to 700 A peak)	±1.0% rdg, ±1 mV Es. (DC, 45 to 66 Hz, 0 to 500 Arms) ±2.3%rdg (DC, 45 to 66 Hz, 50 A to 700 A peak)
Output ratio	0.1 V/A (The output of this probe is internally terminated)	0.01 V/A (The output of this probe is internally terminated)	0.01 V/A (The output of this probe is internally terminated)	0.01 V/A (The output of this probe is internally terminated)
Measurable conductors	Insulated conductor	Insulated conductor	Insulated conductor	Insulated conductor
Cone diameter	ø 5 mm (ø 20 µ)	ø 20 mm (ø 77 µ)	ø 20 mm (ø 77 µ)	ø 20 mm (ø 77 µ)
Power supply	±12 V ±0.5 V, 5.3 VA max.	±12 V ±0.5 V, 5.6 VA max.	±12 V ±1 V, 5.5 VA max.	±12 V ±0.5 V, 7.2 VA max.
Dimensions and mass	125 mm (4.9 in)W × 125 mm (4.9 in)H × 40 mm (1.57 in)D, 240 g (5.3 oz)	125 mm (4.9 in)W × 125 mm (4.9 in)H × 40 mm (1.57 in)D, 230 g (5.1 oz)	125 mm (4.9 in)W × 125 mm (4.9 in)H × 27 mm (1.06 in)D, 500 g (1.1 lb)	125 mm (4.9 in)W × 125 mm (4.9 in)H × 27 mm (1.06 in)D, 500 g (1.1 lb)
Included accessories	Instruction manual x1, Carrying case x1	Instruction manual x1, Soft case x1	Instruction manual x1, Carrying case x1	Instruction manual x1, Carrying case x1

Power Supply for Current Probes

POWER SUPPLY 3269, 3272



- Power supply for the Clamp-on probe 3273-50 - 3276, CT6700 series
- Supplies power when connected to a general-purpose instrument such as a recorder.

Model No. (Order Code)	3269	(For the CT6700 series/3270 series, up to 4)
	3272	(For the CT6700 series/3270 series, up to 1 or 2)

Note: These products cannot be used alone. To measure current, a compatible current sensor is required.

■ Basic specifications

	3269	3272
Compatible sensors	The CT6700, CT6711: up to 2 units The CT6700, CT6701, 3273-50, 3274, 3275 or 3276: up to 3 units Note: Also up to 4 units for the discontinued Model 3275	The CT6700, CT6711: up to 2 units Note: When measuring the maximum peak current, only one unit
Number of power supply connectors	4	2
Output	±12 V ±0.5 V, ±2.5 A (sum total of all channels)	±12 V ±0.5 V, 600 mA (sum total of all channels)
Power supply	100 V to 240 V AC (rms) 50/60 Hz 170 VA max.	100 V or 120/220/240 V AC (rms) (specify when ordering), 50/60 Hz 20 VA max.
Dimensions and mass	30 mm (1.18 in)W × 119 mm (4.69 in)H × 200 mm (7.87 in)D, 1.1 kg (3.8 lbs)	32 mm (1.26 in)W × 119 mm (4.69 in)H × 186 mm (7.32 in)D, 1.1 kg (3.8 lbs)
Included accessories	Instruction manual x1, Power cord x1	Instruction manual x1, Power cord x1, Spare fuse x1

Best-in-class Measurement Bandwidth with High Accuracy

AC/DC CURRENT SENSOR CT6904A



CE

CAT II 1000 V



• **Options**
• **Metal fittings**

- Combined accuracy with HIOKI power analyzer PW8001 and PW6001 is specified (DC, 45 Hz \leq f \leq 65 Hz). For details of combined accuracy, refer to the instruction manual.
- 500 A (rms) or 800 A (rms) rated for measurement of large currents.
- Wide measurement frequency range: DC to 4 MHz (CT6904A, CT6904A-2)
- ± 5 ppm excellent linearity (CT6904A, CT6904A-1)
- 120 dB (100 kHz) high Common-Mode Rejection Ratio (CMRR)

Model No. (Order Code)

CT6904A	(300 A AC/DC, HIOKI ME15A terminal, cable length: 3 m (9.84 ft))
CT6904A-1	(Build-to-order, 500 A AC/DC, HIOKI ME15A terminal, cable length: 10 m (32.81 ft))
CT6904A-2	(Build-to-order, 800 A AC/DC, HIOKI ME15A terminal, cable length: 3 m (9.84 ft))
CT6904A-3	(Build-to-order, 800 A AC/DC, HIOKI ME15A terminal, cable length: 10 m (32.81 ft))

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6904A, CT6904A-1	CT6904A-2, CT6904A-3
Rated current	500 A AC/DC	800 A AC/DC
Max. allowable input	± 1000 A peak Within the derating range, design value, within 20 ms and 40°C (104°F) or less	± 1200 A peak Within the derating range, design value, within 20 ms and 40°C (104°F) or less
Frequency characteristics	Amplitude: DC to 4 MHz (CT6904A-1, CT6904A-3) DC to 2 MHz Phase: DC to 1 MHz	Amplitude: DC to 4 MHz (CT6904A-1, CT6904A-3) DC to 2 MHz Phase: DC to 1 MHz
Linearity	± 5 ppm Typical (23°C [73°F])	± 12.5 ppm Typical (23°C [73°F])
Offset voltage	± 10 ppm Typical (23°C [73°F], no input)	± 10 ppm Typical (23°C [73°F], no input)
Basic accuracy	DC (Amplitude: $\pm 0.025\%$ rdg, $\pm 0.007\%$ f.s., no phase specification) 45 Hz \leq f \leq 65 Hz (Amplitude: $\pm 0.02\%$ rdg, $\pm 0.007\%$ f.s., Phase: $\pm 0.05^\circ$)	DC (Amplitude: $\pm 0.030\%$ rdg, $\pm 0.009\%$ f.s., no phase specification) 45 Hz \leq f \leq 65 Hz (Amplitude: $\pm 0.025\%$ rdg, $\pm 0.007\%$ f.s., Phase: $\pm 0.05^\circ$)
	Defined to 1 MHz:	
Output voltage rate	4 mV / A rated This device outputs AC+DC voltage via the Sensor Unit	2 mV / A rated
Max. rated voltage rate	3000 V CAT III	3000 V CAT III
Core diameter	$\phi 32$ mm (1.26 in)	$\phi 32$ mm (1.26 in)
Operating temperature, humidity	-10°C to 50°C (14°F to 122°F) 80% RH or less (with no condensation)	-10°C to 50°C (14°F to 122°F) 80% RH or less (with no condensation)
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, or Sensor Unit CT9555, CT9556, CT9557	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, or Sensor Unit CT9555, CT9556, CT9557
Max. rated power	7 VA max. (500 A/55 Hz measurement, with a power supply of 412 V)	7 VA max. (500 A/55 Hz measurement, with a power supply of 412 V)
Dimensions and mass	139 mm (5.47 in)W x 120 mm (4.72 in)H x 52 mm (2.05 in)D CT6904A: 1.05 kg (2.33 lb), cable length 30 m (98 ft) CT6904A-1: 1.12 kg (2.47 lb), cable length 10 m (32.81 ft) CT6904A-2: 1.45 kg (3.21 lb), cable length 10 m (32.81 ft) CT6904A-3: 1.6 kg (3.51 lb), cable length 10 m (32.81 ft)	139 mm (5.47 in)W x 120 mm (4.72 in)H x 52 mm (2.05 in)D CT6904A-1: 1.05 kg (2.33 lb), cable length 30 m (98 ft) CT6904A-2: 1.12 kg (2.47 lb), cable length 10 m (32.81 ft) CT6904A-3: 1.45 kg (3.21 lb), cable length 10 m (32.81 ft)
Included accessories	Instruction manual >1, Carrying case >1, Color labels (for channel identification) >1	Instruction manual >1, Carrying case >1, Color labels (for channel identification) >1

Supports Current Measurement of Inverters with High Current and High Speed

AC/DC CURRENT SENSOR CT6875A, CT6876A, CT6877A



CE

CAT II 1000 V



- Combined accuracy with HIOKI power analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz \leq f \leq 65 Hz). For details of combined accuracy, refer to the instruction manual.
 - Meet a wide range of applications from measuring battery charge/discharge to the secondary side of inverters in photovoltaic power generation and fuel cell evaluation, etc.
 - Monitor waveforms when paired with oscilloscopes or Memory HiCorders and Sensor Unit
 - Measures high current up to 2000 A for EV, HEV and other electric vehicles (CT6877A)
 - Improved noise resistance performance through a stronger shield lets you accurately measure current buried in noise
 - High accuracy measurement realized through flat frequency characteristics and CMRR performance
 - More enhanced environmental resistance performance than ever before lets you measure in -40 to 85°C situations
 - Superior frequency characteristics
- CT6875A: DC to 2 MHz (amplitude), CT6876A: DC to 15 MHz (amplitude), CT6877A: DC to 1 MHz (amplitude)

Model No. (Order Code)	CT6875A	(500 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length)
CT6875A-1	(500 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length)	
CT6876A	(1000 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length)	
CT6876A-1	(1000 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length)	
CT6877A	(2000 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length)	
CT6877A-1	(2000 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length)	

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6875A, CT6875A-1	CT6876A, CT6877A-1
Rated current	500 A AC/DC	1000 A AC/DC
Max. allowable input	Within the derating range, up to 1000 Amps (design value) allowed at 40°C or less for 20 ms or less	Within the derating range, up to 1000 Amps (design value) allowed at 40°C or less for 20 ms or less
Frequency bandwidth	Amplitude: DC to 2 MHz (CT6875A), DC to 1.5 MHz (CT6875A-1) Phase: DC to 1 MHz	Amplitude: DC to 1.5 MHz (CT6876A), DC to 1.2 MHz (CT6876A-1) Phase: DC to 1 MHz
Basic accuracy	(DC, 45 Hz \leq f \leq 65 Hz) Amplitude: $\pm 0.04\%$ rdg, $\pm 0.008\%$ f.s., Phase: $\pm 0.1^\circ$	(DC, 45 Hz \leq f \leq 65 Hz) Amplitude: $\pm 0.04\%$ rdg, $\pm 0.008\%$ f.s., Phase: $\pm 0.1^\circ$
Output voltage rate	4 mV / A rated This device outputs AC+DC voltage via the Sensor Unit	2 mV / A rated This device outputs AC+DC voltage via the Sensor Unit
Max. rated voltage rate	3000 V AC/DC (50/60 Hz, CAT III)	3000 V AC/DC (50/60 Hz, CAT III)
Core diameter	$\phi 36$ mm (1.42 in)	$\phi 36$ mm (1.42 in)
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977
Max. rated power	7 VA max. (at 500 A/55 Hz)	7.5 VA max. (at 1000 A/55 Hz)
Dimensions and mass	160 mm (6.30 in)W x 112 mm (4.41 in)H x 50 mm (1.97 in)D, CT6875A: 150 g (0.33 lb), cable length 3 m (9.84 ft), CT6875A-1: 150 g (0.33 lb), cable length 10 m (32.81 ft), CT6876A: 170 g (0.37 lb), cable length 3 m (9.84 ft), CT6876A-1: 170 g (0.37 lb), cable length 10 m (32.81 ft), CT6877A: 180 g (0.39 lb), cable length 3 m (9.84 ft), CT6877A-1: 180 g (0.39 lb), cable length 10 m (32.81 ft)	160 mm (6.30 in)W x 112 mm (4.41 in)H x 50 mm (1.97 in)D, CT6875A: 150 g (0.33 lb), cable length 3 m (9.84 ft), CT6875A-1: 150 g (0.33 lb), cable length 10 m (32.81 ft), CT6876A: 170 g (0.37 lb), cable length 3 m (9.84 ft), CT6876A-1: 170 g (0.37 lb), cable length 10 m (32.81 ft), CT6877A: 180 g (0.39 lb), cable length 3 m (9.84 ft), CT6877A-1: 180 g (0.39 lb), cable length 10 m (32.81 ft)
Included accessories	Instruction manual >1, Mark bands >6, Operating precautions >1	Instruction manual >1, Mark bands >6, Operating precautions >1
	CT6877A, CT6877A-1	
Rated current	2000 A AC/DC	
Max. allowable input	Within the derating range, (within the specified range up to ± 3200 Amps)	
Frequency characteristics	Amplitude: DC to 1 MHz, Phase: DC to 700 kHz	
Linearity	± 10 ppm Typical (23°C [73°F])	
Offset voltage	± 5 ppm Typical (23°C [73°F], no input)	
Basic accuracy	(DC, 45 Hz \leq f \leq 65 Hz) Amplitude: $\pm 0.04\%$ rdg, $\pm 0.008\%$ f.s., Phase: $\pm 0.08^\circ$	
Output voltage rate	1 mV / A rated (This device outputs AC+DC voltage via the Sensor Unit)	
Max. rated voltage rate	3000 V AC/DC (50/60 Hz, CAT III)	
Core diameter	$\phi 80$ mm (3.15 in)	
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	9.5 VA max. (at 2000 A/55 Hz, ± 12 V power requirement)	
Dimensions and mass	229 mm (9.21 in)W x 252 mm (9.92 in)H x 112 mm (4.41 in)D, CT6877A: 5 kg (11.04 lb), cable length 3 m (9.84 ft), CT6877A-1: 5.3 kg (11.73 lb), cable length 10 m (32.81 ft)	
Included accessories	Instruction manual >1, Mark bands >6, Operating precautions >1	

Shared options for CT6904A, CT6875A, CT6876A and CT6877A

Options A	Options B	Options C
Power supply for current sensors (1ch, with waveform output)	Connection cord (1ch) 1.6 m (5.21 ft) length	Conversion cable (1ch) 0.9 m (3 ft) length
Power supply for current sensors (3ch, individual output)	Connection cord (3ch) 1.6 m (5.21 ft) length	Extension cable (1ch) 1.6 m (5.21 ft) length
Power supply for current sensors (3ch, with waveform output)	Connection cord (3ch) 1.6 m (5.21 ft) length	Conversion cable (3ch) 1.6 m (5.21 ft) length

Current Sensors (High precision, Pass-through sensors)

Connected to a voltage input device with a high impedance of at least 1 MΩ

Low-current Model of 50 A or 200A rating, with Wideband and High Accuracy

AC/DC CURRENT SENSOR CT6872, CT6873



CE
CAT II 1000 V

HIOKI ME15W
(12-pin terminal)

- Combined accuracy with HIOKI power analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Wide bandwidth DC to 10 MHz; excellent frequency characteristics.
- Applications in the fields of electric and hybrid electric vehicles.
- Wide operating temperature range (-40°C to 85°C) fit for automobile applications.
- Ideal for evaluation of solar power generation and fuel cells to measure battery charge and discharge and the secondary side of inverters.
- For observing waveforms to be used with the oscilloscopes or Memory HiCorders (use with SENSOR UNIT).

Model No. (Order Code)	CT6872	(50 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length)
	CT6872-01	(50 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length)
	CT6873	(200 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length)
	CT6873-01	(200 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length)

Note: These products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

Options A	Options B	Options C	Options D
SENSOR UNIT CT9555 Power supply for current sensor (dc, widebandpass output)	SENSOR UNIT CT9556 Power supply for current sensor (dc, widebandpass output (EMI output))	SENSOR UNIT CT9557 Power supply for current sensor (dc, widebandpass and waveform/test EMI output)	CONVERSION CABLE CT9001 To connect HIOKI PL2 (12-pin) to HIOKI PL2 (10-pin) connector
CONNECTION CORD LS917 For the model 9000 series (DC, widebandpass and waveform/test EMI output)	CONNECTION CORD 9165 For the model 9000 series (DC, EMI output)	CONNECTION CORD LS917 For the model 9000 series (DC, widebandpass and waveform/test EMI output)	EXTENSION CABLE CT9002 5 m (16-ft 5-in) input, HIOKI ME15W (12-pin) to HIOKI PL2 (10-pin) connector
			CONVERSION CABLE SB13 To connect HIOKI PL2 (10-pin) to HIOKI PL2 (12-pin) connector
			CONVERSION CABLE SB13 To connect HIOKI PL2 (10-pin) to HIOKI PL2 (12-pin) connector

Delivering Wide Operating Temperature Range and High-precision Current Measurement

AC/DC CURRENT SENSOR CT6862, CT6863



CE
CAT II 1000 V

HIOKI ME15W
(12-pin terminal)

- Super high precision
- Wide-bandwidth DC to 1 MHz (CT6862-05); excellent frequency characteristics
- Applications in the fields of electric and hybrid electric vehicles
- Wide operating temperature range (-30°C to 85°C) fit for automobile applications
- Ideal for evaluation of solar power generation and fuel cells to measure battery charge and discharge and the secondary side of inverters
- For observing waveforms to be used with the oscilloscopes or Memory HiCorders (use with SENSOR UNIT)

Model No. (Order Code)	CT6862-05	(50 A AC/DC, ME15W terminal)
	CT6863-05	(200 A AC/DC, ME15W terminal)

Note: These products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6862-05	CT6863-05		
Rated current	50 A AC/DC	200 A AC/DC		
Max. allowable input	100 A rms (requires derating)	400 A rms (requires derating)		
Frequency characteristics	Amplitude: DC to 1 MHz; Phase: DC to 300 kHz	Amplitude: DC to 500 kHz; Phase: DC to 300 kHz		
Amplitude and Phase accuracy	DC ±0.05% rdg ±0.01% Es. (Phase: Not defined) 16 Hz ≤ f ≤ 400 Hz ±0.05% rdg ±0.01% Es. (Phase: ±0.2°) Defined to 1 MHz (CT6862-05) Defined to 500 kHz (CT6863-05)			
Output voltage	2 V (rated current value) (This device outputs AC/DC voltage via the Sensor Unit.)			
Max. rated voltage earth	1000 V AC/DC (50/60 Hz, CAT III)			
Core diameter	Φ 24 mm (0.94 in)			
Operating temperature, humidity	-30°C to +85°C (-22°F to 185°F), 100% RH or less (with no condensation)			
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, or Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977			
Power consumption	5 Vdc, max. (at 10.65 Hz, ±0.2% power requirement)	4 Vdc, max. (at 200 x 65 Hz, ±0.2% power requirement)		
Dimensions and mass	100 mm (3.94 in) W × 100 mm (3.94 in) H × 50 mm (1.97 in) D, 340 g (12.0 oz), and length: 3 m (9.84 ft)	100 mm (3.94 in) W × 100 mm (3.94 in) H × 50 mm (1.97 in) D, 300 g (11.0 oz), and length: 3 m (9.84 ft)		
Included accessories	Instruction manual >1, Mark bands >6			
Compatible models	(CT6862)	(CT6862-05) (CT6863) (CT6863-05)		
PW8001	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
PW6001	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
PW3390	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
U8977	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
8971	▲ (Requires the 9101)	▲ (Requires the 9101, CT9900)	▲ (Requires the 9101)	▲ (Requires the 9101, CT9900)

Options A	Options B	Options C	Options D
SENSOR UNIT CT9555 Power supply for current sensor (dc, widebandpass output)	SENSOR UNIT CT9556 Power supply for current sensor (dc, widebandpass output (EMI output))	SENSOR UNIT CT9557 Power supply for current sensor (dc, widebandpass and waveform/test EMI output)	CONVERSION CABLE CT9001 To connect HIOKI PL2 (12-pin) to HIOKI PL2 (10-pin) connector
CONNECTION CORD LS917 For the model 9000 series (DC, widebandpass and waveform/test EMI output)	CONNECTION CORD 9165 For the model 9000 series (DC, EMI output)	CONNECTION CORD LS917 For the model 9000 series (DC, widebandpass and waveform/test EMI output)	EXTENSION CABLE CT9002 5 m (16-ft 5-in) input, HIOKI ME15W (12-pin) to HIOKI PL2 (10-pin) connector
			CONVERSION CABLE SB13 To connect HIOKI PL2 (10-pin) to HIOKI PL2 (12-pin)

Current Sensors (High precision, Clamp type)

Connect to a voltage input device with a high impedance of at least 1 MΩ.

High-precision Current Testing

AC/DC CURRENT PROBE CT6844A, CT6845A, CT6846A



HIOKI MET50W
(12-pinch type)

- Combined accuracy with HIOKI power analyzer PW8001, PW8001 and PW3390 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Frequency bandwidth: DC to 500 kHz (CT6844A), DC to 200 kHz (CT6845A), DC to 100 kHz (CT6846A)
- Ideal for use in environmental testing with broad -40°C to 85°C temperature range
- Single-handed operation and robust locking mechanism
- Large jaw for clamping thick and paired wires (CT6845A, CT6846A)
- Power supplied via the measurement instrument (when connecting HIOKI POWER ANALYZER or MEMORY RECORDER)
- Ideal for EV inverter evaluation and PV power generation PCS evaluation

Model No. (Unit: Ampere) **CT6844A** (500 A AC/DC, MET50W terminal)
CT6845A (500 A AC/DC, MET50W terminal)
CT6846A (1000 A AC/DC, MET50W terminal)

Compatible models	CT6844A	CT6845A	CT6846A
PW8001	✓	✓	✓
PW8001	✓	✓	✓
PW3390	✓	✓	✓
U8977	✓	✓	✓
8971	(Requires the MET50, CT9901) (Requires the MET50, CT9901) (Requires the MET50, CT9901)		

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6844A	CT6845A	CT6846A
Rated current	500 A AC/DC	1000 A AC/DC	1000 A AC/DC
Frequency bandpass	DC to 500 kHz	DC to 200 kHz	DC to 100 kHz
Core diameter	ø 20 mm (0.79 in)	ø 50 mm (1.97 in)	ø 50 mm (1.97 in)
Max. allowable input (Within 20 ms in an environment of 40°C/104°F or less)	±800 A peak	±1500 A peak	±1900 A peak
Output voltage	4 mV/A	2 mV/A	2 mV/A
Output resistance	50 Ω ± 10 Ω		
Accuracy (amplitude)	DC: ±0.2% rdg + 0.02% f.s., DC < f ≤ 100 Hz: ±0.2% rdg ± 0.01% f.s.		
Linearity	±20 ppm Typical		
Common-Mode Voltage Rejection Ratio (CMRR)	DC to 1 kHz: 130 dB (greater than 100 dB); 100 dB or greater 100 kHz to 1000 kHz: 100 dB (greater than 100 dB); 100 dB or greater (effect on output voltage and common-mode voltage)	DC to 1 kHz: 130 dB (greater than 100 dB); 100 dB (greater than 100 dB); 100 dB or greater (effect on output voltage and common-mode voltage)	DC to 1 kHz: 130 dB (greater than 100 dB); 100 dB (greater than 100 dB); 100 dB or greater (effect on output voltage and common-mode voltage)
Automatic phase correction	Automatically performs phase correction when connected to PW8001		
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)		
Standards	Safety IEC 61010-2-032:2012/EN 61010-2-032:2012 Type D EMC IEC 61326-1:2012/EN 61326-1:2013		
Withstand voltage	AC 4,260 V		
Power supply	Power supplied via the Power Analyzer PW8001, PW8001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977		
Max. rated power	7 VA max. (at 500 A/55 Hz, ±12 V power requirement)	7 VA max. (at 1000 A/55 Hz, ±12 V power requirement)	
Dimensions and mass	150 mm (5.92 in)W × 87 mm (3.44 in)H × 25 mm (0.98 in)D, 400 g (14.1 oz), cord length: 2 m (6.54 ft)	238 mm (9.37 in)W × 116 mm (4.57 in)H × 25 mm (1.38 in)D, 660 g (30.3 oz), cord length: 2 m (6.54 ft)	238 mm (9.37 in)W × 116 mm (4.57 in)H × 25 mm (1.38 in)D, 990 g (34.9 oz), cord length: 2 m (6.54 ft)
Included accessories	Instruction manual × 1, Mark bands × 6, Carrying Case × 1		

Note: These products cannot be used alone. The optional JEWELER UNIT is required in order to supply power and connect the clamp to a Memory Recorder or other instrument. Products can be directly connected to the compatible Power Meters.



High-precision Current Testing

AC/DC CURRENT PROBE CT6841A, CT6843A



HIOKI ME15W
(12-pin terminal)



- Combined accuracy with HIOKI power analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz $\leq f \leq$ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Frequency bandwidth: DC to 2 MHz (CT6841A), DC to 700 kHz (CT6843A).
- Ideal for use in environmental testing with broad -40°C to 85°C temperature range.
- Single-handed operation and robust locking mechanism.
- Power supplied via the measurement instrument (when connecting HIOKI POWER ANALYZER or MEMORY HICORDER).
- Ideal for EV inverter evaluation and PV power generation PCS evaluation.

Model No. (Order Code) CT6841A (20 A AC/DC, ME15W terminal)
CT6843A (20 A AC/DC, ME15W terminal)

Note: These products cannot be used alone. The optional 200303 UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.



CONNECTION CORD 9816
Cord terminated BNC connectors at both ends, 1.6 m (5.25 ft) length

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6841A	CT6843A
Rated current	20 A AC/DC	200 A AC/DC
Frequency bandwidth	DC to 2 MHz	DC to 700 kHz
Core diameter	ø 20 mm (0.79 in)	
Max. allowable input	±60 A peak (Within 20 ms in an environment of 40°C/90%PF or less)	±600 A peak
Output voltage	100 mV/A	10 mV/A
Output resistance	50 Ω ± 10 Ω	
Accuracy (amplitude)	DC: ±0.2% rdg ± 0.01% f.s. DC < f ≤ 100 Hz: ±0.2% rdg ± 0.01% f.s.	DC: ±0.2% rdg ± 0.02% f.s. DC < f ≤ 1000 Hz: ±0.2% rdg ± 0.01% f.s.
Linearity	±20 ppm Typical	
Common-Mode Voltage Rejection Ratio (CMRR)	DC to 1 kHz: 140 dB or greater 1 kHz to 30 kHz: 125 dB or greater 10 kHz to 100 kHz: 100 dB or greater 100 kHz to 1 MHz: 80 dB or greater (effect on input voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 135 dB or greater 10 kHz to 100 kHz: 115 dB or greater 100 kHz to 1 MHz: 95 dB or greater (effect on output voltage and common mode voltage)
Automatic phase correction	Automatically performs phase correction when connected to PW8001	
Operating temperature/humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Standards	Safety IEC 61010-2-032:2012/EN 61010-2-032:2012 Type D EMC IEC 61326-1:2012/EN 61326-1:2013	
Withstand voltage	AC 4,200 V	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9955, CT9956, CT9957, or 3CH CURRENT UNIT U8977	
Max. rated power	5 VA max. (at 20 A/55 Hz, 11.5 V power requirement)	6 VA max. (at 20 A/55 Hz, 11.5 V power requirement)
Dimensions and mass	150 mm (6.02 in)W × 67 mm (2.64 in)H × 25 mm (0.98 in)D, cord length: 3 m (9.84 ft) CT6841A: 370 g (13.05 oz), CT6843A: 380 g (13.4 oz)	
Included accessories	Instruction manual x1, Mark bands x6, Carrying Case x1	

Compatible models	CT6841A	CT6843A
Power Analyzer PW8001	✓	✓
Power Analyzer PW6001	✓	✓
Power Analyzer PW3390	✓	✓
3CH Current Unit U8977	✓	✓
Current Unit U8971	▲ (Requires 9818 and CT9965)	▲ (Requires 9818 and CT9965)

One of the industry's smallest current sensors

AC/DC CURRENT PROBE CT6830, CT6831



- Exceptional performance in a compact package
- Easy to install in confined locations with complex wiring
- High accuracy: $\pm 0.3\%$ rdg, $\pm 0.1\%$ f.s.
- Decreased offset drift that comes from temperature changes.

Model No. (Order Code) CT6830 (2 A AC/DC, ME15W terminal)
CT6831 (20 A AC/DC, ME15W terminal)

Note: These products can be used with PW8001, PW6001, PW3390, CT9955, CT9956, CT9957, and U8977.

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6830	CT6831
Rated measurement current	2 A AC/DC	20 A AC/DC
Max. allowable input	3 A rms continuous (± 4.3 Ap)	30 A rms continuous (± 4.3 Ap)
Bandwidth	DC to 100 kHz	
Core diameter	ø 5 mm or less	
Output connectors	HIOKI ME 15W	
Operating temperature range	Sensor: -40°C to 85°C, 80% RH or less (non-condensing) Multiplexer: -25°C to 50°C, 80% RH or less (non-condensing)	
Dimensions	Sensor: 76.5W × 23.4H × 14.2D mm (excluding protrusions and the cable) Multiplexer: 80W × 20H × 26.5D mm (excluding protrusions and the cable)	
Weight	140 g	
Output cable length	4 m (between sensor and multiplexer) 0.2 m (between multiplexer and output connector)	
Included accessories	Colored labels (for channel identification), Carrying case, Instruction Manual, Operating Precautions	

Power Supply for 4ch High-Precision Current Sensors Capable of Adding Current Waveforms

SENSOR UNIT CT9555



- Power supply for high-precision current sensors with waveform output functionality
- Channel-specific waveform output, total waveform output, total RMS output
- Ideal for measuring multi-cable circuits

Model No. (Order Code) CT9555 (For the CT6841A, etc., ME15W terminal)

	■ Basic specifications (Accuracy guaranteed for 1 year)
Connectable current sensors	Current sensors with a HIOKI ME15W (male) output connector (CT6841A, etc.)
*The separately available Conversion Cable CT9900 is required in order to use a current sensor equipped with a PL23 (10-pin) terminal.	
Output Terminal	BNC Terminal
Output voltage	Waveform output/ Total waveform output: 2 V f.s. Total RMS output: 2 V DC f.s.
Output resistance	50 Ω
Operating temperature range	-40°C to 50°C (14°F to 122°F)
Power supply	AC Adapter Z1002 (100 to 240 V AC, 50/60 Hz, maximum rated power when used with sensors: 155 VA) External power supply (10 to 30 V DC, maximum rated power: 60 VA)
Dimensions and mass	116 mm (4.57 in)W × 67 mm (2.64 in)H × 132 mm (5.20 in)D (excluding protruding parts), 420 g (14.8 oz)
Included accessories	AC Adapter Z1002 x1, Power cord x1, Instruction manual x1

AC/DC Current Sensors

Connect to a voltage input device with a high impedance of at least 1 MΩ

Power Supplies for High-Precision Current Sensors

SENSOR UNIT CT9555, CT9556



CT9555

CT9556



- Power supply for high-precision current sensors with waveform output functionality (CT9555)
- Power supply for high-precision current sensors with waveform output/RMS output functionality (CT9556)

Model No. (Order Code) CT9555 (For the CT9541A, etc., ME15W connector)
CT9556 (For the CT9541A, etc., ME15W connector)

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT9555	CT9556
Connectable current sensors	Current sensors with a HOKI ME15W (12-pin) output connector (CT9502, CT9541A, etc.) * The separately available Conversion Cable CT9900 is required in order to use a current sensor equipped with a PL23 (9-pin) terminal.	
Output Terminal	BNC Terminal	
Output voltage	Waveform output: 2 V F.s. RMS output: 2 V DC F.s.	Waveform output: 2 V F.s. RMS output: 2 V DC F.s.
Output resistance	50 Ω	
Operating temperature range	-10 °C to 50 °C (14 °F to 122 °F)	
Power supply	AC Adapter Z1008 (100 to 240 V AC, 50/60 Hz, maximum rated power when used with sensors: 45 VA) External power supply (10 to 30 V DC, maximum rated power: 15 VA)	
Dimensions and mass	33 mm (1.30 in) W × 67 mm (2.64 in) H × 132 mm (5.20 in) D (excluding protruding parts), 200 g (7.1 oz)	
Included accessories	AC Adapter Z1008 1, Power cord 1, Instruction manual 1	

Shared options for CT9555, CT9556 and CT9557

CONNECTION CABLE CT9904 ME15W (2-pin) terminal to ME15W (2-pin) terminal, 1 m (3.28 ft) length (for connecting CT9557 total input to PW9001, PW9001 or PW9330 and)	CONNECTION CORD L9217 Cat. II isolated BNC connector at both ends, 1.6 m (5.23 ft) length	CONNECTION CORD 9165 Cat. II isolated BNC connector at both ends, one at metallic terminal, 1.5 m (4.92 ft) length	CONVERSION CABLE CT9900 PL23 (9-pin) to ME15W (2-pin) connector	CONVERSION CABLE CT9901 ME15W (2-pin) to PL23 (9-pin) connector
--	--	---	--	--

Ideal for Measuring AC Current with Low Frequencies such as Inverter Control Devices

CLAMP ON SENSOR 9272



HOKI ME15W
(12-pin terminal)



CAT III 600 V

- Superior low frequency and phase characteristics suitable for testing the current and power of inverter control devices
- Wide 1 Hz to 100 kHz frequency bandwidth perfect for harmonic analysis, FFT analysis and waveform monitoring (AC only)

Model No. (Order Code) 9272-05 (200 A AC, ME15W terminal)

Note: This product cannot be used alone. The optional Sensor Unit is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. The clamp can be directly connected to a compatible Power Meters.



■ Basic specifications (Accuracy guaranteed for 1 year)

Rated current	20 A AC, or 200 A AC (selectable)
Max. allowable input	50 A rms (at 20 A range), 300 A rms (at 200 A range)
Frequency characteristics	1 Hz (±2% rdg ±0.1% f.s.) to 100 kHz (±0.5% rdg ±0.1% f.s.)
Amplitude and Phase accuracy	Amplitude: ±0.3% rdg ±0.01% f.s. Phase: ±0.2° (5 to 66 Hz)
Output voltage	2 V/20 A rated current range, or 2 V/200 A rated current range (This device outputs AC/DC voltage via the Sensor Unit.)
Max. rated voltage to earth	600 V rms (CAT III)
Core diameter	ø 46 mm (1.81 in)
Power supply	Power supplied via the Power Analyzer PW9001, PW9001L, PW9330, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U9877
Power consumption	5 VA Max. (when measuring 200 A)
Dimensions and mass	78 mm (3.07 in) W × 183 mm (7.20 in) H × 35 mm (1.38 in) D, 430 g (15.2 oz), cord length: 3 m (9.8 ft)
Included accessories	Carrying case 9355 1, Instruction manual 1, Mark bands 6

Compatible models 9272-10 9272-05

Power Analyzer PW9001	▲ (Requires CT9900)	✓
Power Analyzer PW9330	▲ (Requires CT9900)	✓
3CH Current Unit U9877	▲ (Requires CT9900)	✓
Current Unit R971	▲ (Requires the R938)	▲ (Requires the R938, CT9901)

OPTION A	SENSOR UNIT CT9555 Power supply for current sensor (20 A, with waveform output)	SENSOR UNIT CT9556 Power supply for current sensor (20 A, with waveform and RMS output)	SENSOR UNIT CT9557 Power supply for current sensor (200 A, with waveform and RMS output)	CONNECT CORD L9217 Cat. II isolated BNC connector at both ends, 1.6 m (5.23 ft) length	CONNECT CORD 9165 Cat. II isolated BNC connector at both ends, one at metallic terminal, 1.5 m (4.92 ft) length
----------	--	--	---	---	--

CONNECT CORD 9165 Cat. II isolated BNC connector at both ends, one at metallic terminal, 1.5 m (4.92 ft) length	CONVERSION CABLE CT9901 PL23 (9-pin) to ME15W (2-pin) connector	EXTENSION CABLE CT9902 ME15W (2-pin) to PL23 (9-pin) connector
--	--	---

FOR POWER INPUT TO THE PW9001, PW9001L, PW9330 OR CURRENT UNIT U9877	CONVERSION CABLE 9181 To connect R938/PL23 (9-pin) connector to the R938/ME15W (2-pin) connector
---	---

One of the industry's smallest current sensors

AC/DC CURRENT SENSOR CT7812, CT7822



- Exceptional performance in a compact package
- Easy to install in confined locations with complex wiring
- High accuracy: ±0.3% rdg. ±0.1% f.s.
- Decreased offset drift that comes from temperature changes

Model No. (Order Code) CT7812 (2 A AC/DC)
CT7822 (20 A AC/DC)

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT7812	CT7822
Rated measurement current	2 A AC/DC	20 A AC/DC
Max. allowable input	3 A rms continuous (14.3 Ap)	30 A rms continuous (143 Ap)
Bandwidth	DC to 100 kHz	
Core diameter	ø 5 mm or less	
Output connectors	HOKI PL 14	
Operating temperature range	Sensor: -40 °C to 85 °C, 80% RH or less (non-condensing) Multiplexer: -25 °C to 50 °C, 80% RH or less (non-condensing)	
Dimensions	Sensor: 76.5W × 23.4H × 14.2D mm (excluding protrusions and the cable) Multiplexer: 80W × 20H × 26.5D mm (excluding protrusions and the cable)	
Weight	140 g	
Output cable length	4 m (between sensor and multiplexer) 0.2 m (between multiplexer and output connector)	
Included accessories	Colored labels (for channel identification), Carrying case, Instruction Manual, Operating Precautions	

Note: These products can be used with CM330 and LR8396.
These products cannot be used with PQ9001, PQ9001L, CM7290, and CM7291.

AC/DC Current Sensors

Connect to a voltage input device with a high impedance of at least 1 MΩ

Accurate, Long-term Recording and Easy Output Settings

AC/DC AUTO-ZERO CURRENT SENSOR CT7700 series



CE
CAT III 600 V



- Accurately measure and record even when the temperature changes
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit)

Model No. (Order Code) **CT7742** (2000 A AC/DC, φ55 mm (2.17 in))
CT7736 (600 A AC/DC, φ33 mm (1.30 in))
CT7731 (100 A AC/DC, φ33 mm (1.30 in))

Note: CT7700 series cannot be used alone. Use with the Display Unit CM7290, CM7291 to connect with Data Loggers and Memory HiCorders.

When used in combination with CM7290 or CM7291, the frequency band of current display and waveform output becomes narrow.

■ Basic specifications (Accuracy guaranteed for 3 years)

	C17742	C17736	C17731
Rated measurement current	2000 A AC/DC	600 A AC/DC	100 A AC/DC
Max. measurement current	2000 A (requires derating at frequency)	600 A (requires derating at frequency)	100 A (requires derating at frequency)
Max. allowable peak input	2840 A peak	900 A peak	150 A peak
Bandwidth	DC to 5 kHz (3dB) (When used in combination with CM7290 or CM7291: DC 3 Hz to 1 kHz)		
Typical accuracy	±2.3 deg. (DC < f ≤ 66 Hz)	±1.8 deg. (DC < f ≤ 66 Hz)	±1.8 deg. (DC < f ≤ 66 Hz)
Output rate	0.1 mV/A	1 mV/A	1 mV/A
Max. rated voltage to earth	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV)
Core diameter	φ 55 mm (2.17 in) or less	φ 33 mm (1.30 in) or less	φ 33 mm (1.30 in) or less
Output connectors	HIROSE PL.14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	Jaws and barrels: IP50 (when jaw closes)/Grip: IP54 (when measuring insulated conductors only). Do not use when wet.)		IP40 (when jaw closes)
Dimensions and mass	64 mm (2.52 in)W × 195 mm (7.68 in)H × 34 mm (1.34 in)D, 510 g (38.0 oz), Cable length 2.5 m (8.20 ft)	64 mm (2.52 in)W × 160 mm (6.30 in)H × 34 mm (1.34 in)D, 320 g (11.3 oz), Cable length 2.5 m (8.20 ft)	58 mm (2.28 in)W × 132 mm (5.20 in)H × 38mm (0.71 in)D, 250 g (8.8 oz), Cable length 2.5 m (8.20 ft)
Included accessory	None		

* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

Accurate, Instantaneous Waveforms Recording and Easy Output Settings

AC/DC CURRENT SENSOR CT7600 series



CE
CAT III 600 V



- Ideal for observing instantaneous waveforms in laboratories and other temperature-controlled environments
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit)

Model No. (Order Code) **CT7642** (2000 A AC/DC, φ55 mm (2.17 in))
CT7636 (600 A AC/DC, φ33 mm (1.30 in))
CT7631 (100 A AC/DC, φ33 mm (1.30 in))

Note: CT7600 series cannot be used alone. Use with the Display Unit CM7290, CM7291 to connect with Data Loggers and Memory HiCorders.

When used in combination with CM7290 or CM7291, the frequency band of current display and waveform output becomes narrow.

■ Basic specifications (Accuracy guaranteed for 3 years)

	C17642	C17636	CT7631
Rated measurement current	2000 A AC/DC	600 A AC/DC	100 A AC/DC
Max. measurement current	2000 A (requires derating at frequency)	600 A (requires derating at frequency)	100 A (requires derating at frequency)
Max. allowable peak input	2840 A peak	900 A peak	150 A peak
Bandwidth	DC to 10 kHz (3dB) (When used in combination with CM7290 or CM7291: DC 3 Hz to 1 kHz)		
Typical accuracy	±2.3 deg. (DC < f ≤ 66 Hz)	±1.8 deg. (DC < f ≤ 66 Hz)	±1.8 deg. (DC < f ≤ 66 Hz)
Output rate	0.1 mV/A	1 mV/A	1 mV/A
Max. rated voltage to earth	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV)
Core diameter	φ 55 mm (2.17 in) or less	φ 33 mm (1.30 in) or less	φ 33 mm (1.30 in) or less
Output connectors	HIROSE PL.14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	Jaws and barrels: IP50 (when jaw closes)/Grip: IP54 (when measuring insulated conductors only). Do not use when wet.)		IP40 (when jaw closes)
Dimensions and mass	64 mm (2.52 in)W × 195 mm (7.68 in)H × 34 mm (1.34 in)D, 510 g (38.0 oz), Cable length 2.5 m (8.20 ft)	64 mm (2.52 in)W × 160 mm (6.30 in)H × 34 mm (1.34 in)D, 320 g (11.3 oz), Cable length 2.5 m (8.20 ft)	58 mm (2.28 in)W × 132 mm (5.20 in)H × 38mm (0.71 in)D, 250 g (8.8 oz), Cable length 2.5 m (8.20 ft)
Included accessory	None		

* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

Shared options for CT7000 series

DISPLAY UNIT CM7290 Power supply for the CT7000 series single probe, Measure, Display, Signal output function, Built-in Bluetooth® wireless technology	DISPLAY UNIT CM7291 Power supply for the CT7000 series single probe, Measure, Display, Signal output function	EXTENSION CABLE L0280-01 2 m (6.56 ft) length	EXTENSION CABLE L0280-02 1 m (3.28 ft) length	EXTENSION CABLE L0280-03 0.5 m (1.64 ft) length	EXTENSION CABLE L0280-04 0.3 m (0.98 ft) length	EXTENSION CABLE L0280-05 0.3 m (0.98 ft) length	EXTENSION CABLE L0280-06 0.3 m (0.98 ft) length	EXTENSION CABLE L0280-07 0.5 m (1.64 ft) length
---	--	--	--	--	--	--	--	--

CARRYING CASE C0220 For storage cases CM7290, CM7291, AC adapter, power cord, and 3M™ extension cable	CARRYING CASE C0221 For storage cases CM7290, CM7291, AC adapter, power cord, and 3M™ extension cable
--	--

Multifunctional Display Unit to Use Right on the Field or Output to Advanced Recorder or Logger

DISPLAY UNIT CM7290, CM7291



Bluetooth®

CM7291 only



- Send measured values to a smartphone or tablet using Bluetooth® wireless technology (CM7291)
- Use the GENNECT Cross dedicated app to display and review measured values and waveforms in real time (CM7291)
- Power supply and signal output for Current Sensor CT7000 series
- Simultaneous dual display of the measured values, frequency, and output rate
- Four output formats to output data to loggers or other devices (via Display Unit)
- Supports AC adapter, AA alkaline batteries, and external power supply

Model No. (Order Code) CM7290 (For the CT7000 series)

CM7291 (For the CT7000 series, with built-in Bluetooth® wireless technology)

Note: CM7290, CM7291 cannot be used alone. Use with CT7000 series.
When used in combination with the CT7000 sensor series, the frequency band for current display and waveform output is narrower than the sensor band.

This product can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. (CM7291, Search for "HIOKI" and download the "GENNECT Cross" app.)



* Android, Google Play and the Google Play logo are trademarks of Google Inc.

** iPhone, iPod touch and iPad are trademarks of Apple Inc. and/or its affiliates. All other marks and names may be trademarks of their respective owners.

Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

Microsoft, Windows, Windows Phone and Silverlight are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

The Bluetooth® wordmark and logo are registered trademarks owned by Bluetooth SIG, Inc. and/or its affiliate(s) in the U.S. and/or other countries.

* Water and dust resistance intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

■ Basic specifications (Accuracy guaranteed for 1 year)


Sensor	CT7642, 7742	CT7636, 7736	CT7631, 7731
Measurement parameters	DC, AC, DC+AC, Hz	DC, AC, DC+AC, Hz	DC, AC, DC+AC, Hz
Crest factor	3 at 5000 count or 2.5 at 6000 count for AC and DC+AC	3 at 5000 count or 2.5 at 6000 count for AC and DC+AC	3 at 5000 count or 2.5 at 6000 count for AC and DC+AC
Output method	WAVE, RMS, PEAK, FREQ	WAVE, RMS, PEAK, FREQ	WAVE, RMS, PEAK, FREQ
Input connectors	HIOKI PL 34	HIOKI PL 34	HIOKI PL 34
Output update time	PEAK=FAST: 0.01 s/NORMAL: 0.1 s/LOW: 1 s FREQ=FAST: 0.01 s/NORMAL: 0.1 s/LOW: 10 s/RMS: 100 ms (using output)	PEAK=FAST: 0.01 s/NORMAL: 0.1 s/LOW: 1 s FREQ=FAST: 0.01 s/NORMAL: 0.1 s/LOW: 10 s/RMS: 100 ms (using output)	PEAK=FAST: 0.01 s/NORMAL: 0.1 s/LOW: 1 s FREQ=FAST: 0.01 s/NORMAL: 0.1 s/LOW: 10 s/RMS: 100 ms (using output)
PEAK sensing duration	2 ms or greater (during PEAK MAX/PEAK MIN and PEAK output)	2 ms or greater (during PEAK MAX/PEAK MIN and PEAK output)	2 ms or greater (during PEAK MAX/PEAK MIN and PEAK output)
Other functions	Auto range, Zero adjustment at power-up, Analysis display, Filter, Output amplification, Display value hold, Backlight, Auto-power save, Save settings, Keypad lock	Auto range, Zero adjustment at power-up, Analysis display, Filter, Output amplification, Display value hold, Backlight, Auto-power save, Save settings, Keypad lock	Auto range, Zero adjustment at power-up, Analysis display, Filter, Output amplification, Display value hold, Backlight, Auto-power save, Save settings, Keypad lock
Typical accuracy (RMS output DC)	±2.0% rdg ±0.8 mV (0.00 A range)	±2.5% rdg ±0.8 mV (0.00 A range)	±1.5% rdg ±0.8 mV (0.00 A range)
Typical accuracy (RMS output AC)	±2.7% rdg ±0.8 mV (0.00 A range)	±2.9% rdg ±0.8 mV (0.00 A range)	±1.8% rdg ±0.8 mV (0.00 A range)
Communication interface	Built-in line test* 40 dB, Display of measured values on an LCD or liquid crystal (CM7291 only)	Built-in line test* 40 dB, Display of measured values on an LCD or liquid crystal (CM7291 only)	Built-in line test* 40 dB, Display of measured values on an LCD or liquid crystal (CM7291 only)
Power supply	LR6 alkaline batteries (AA) × 2, Continuous use: 16 h (single OFF and WAVE or RMS output, when used with CT7636 series), Rated power: 2.5 VA or AC adapter 2645-02 (100 to 240 V AC), or 5 to 15 V DC external power supply, Rated power: 2.5 VA	LR6 alkaline batteries (AA) × 2, Continuous use: 16 h (single OFF and WAVE or RMS output, when used with CT7636 series), Rated power: 2.5 VA or AC adapter 2645-02 (100 to 240 V AC), or 5 to 15 V DC external power supply, Rated power: 2.5 VA	LR6 alkaline batteries (AA) × 2, Continuous use: 16 h (single OFF and WAVE or RMS output, when used with CT7636 series), Rated power: 2.5 VA or AC adapter 2645-02 (100 to 240 V AC), or 5 to 15 V DC external power supply, Rated power: 2.5 VA
Dust and water resistance*	IP54 (when sensor connected and connected to AC adapter and power connected)	IP54 (when sensor connected and connected to AC adapter and power connected)	IP54 (when sensor connected and connected to AC adapter and power connected)
Dimensions and mass	52 mm (2.05 in) W × 163 mm (6.42 in) H × 37 mm (1.46 in) D, 220 g (7.8 oz) (including protective and battery)	52 mm (2.05 in) W × 163 mm (6.42 in) H × 37 mm (1.46 in) D, 220 g (7.8 oz) (including protective and battery)	52 mm (2.05 in) W × 163 mm (6.42 in) H × 37 mm (1.46 in) D, 220 g (7.8 oz) (including protective and battery)
Included accessories	LR6 alkaline batteries × 2, Protector (attached to unit) × 1, Instruction manual × 1	LR6 alkaline batteries × 2, Protector (attached to unit) × 1, Instruction manual × 1	LR6 alkaline batteries × 2, Protector (attached to unit) × 1, Instruction manual × 1

* Water and dust resistance intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.



Easy to loop around, even in confined spaces

AC FLEXIBLE CURRENT SENSOR CT7040 series

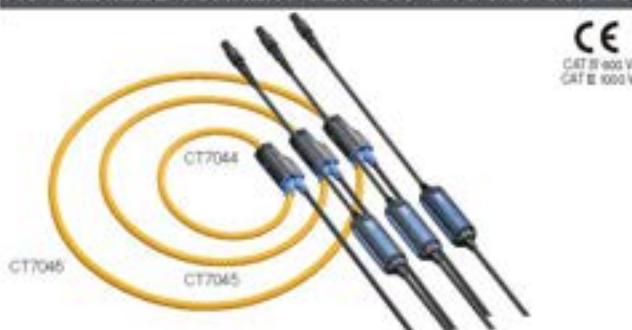

- Thinner cables are easier to use in confined spaces and with complicated wiring
- Supports large current measurements up to 6000 A
- Wide 10 Hz to 50 kHz band with excellent frequency characteristics
- Choose from three conductor diameter sizes
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code) CT7046 (6000 A, φ254 mm (10.00 in))

CT7045 (6000 A, φ380 mm (7.94 in))

CT7044 (6000 A, φ300 mm (3.94 in))

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT7046	CT7045	CT7044
Rated measurement current		6000 A AC	
Internal measurement range	600 A AC/6000 A AC (Range is controlled by main device)	600 A AC/6000 A AC (Range is controlled by main device)	600 A AC/6000 A AC (Range is controlled by main device)
Max. allowable input	10000 A continuous (at 6000 A range, 45 to 66 Hz, requires derating)	10000 A continuous (at 6000 A range, 45 to 66 Hz, requires derating)	10000 A continuous (at 6000 A range, 45 to 66 Hz, requires derating)
Bandwidth	10 Hz to 50 kHz (0.01) (When used in combination with CM7290 or CM7291: 10 Hz to 1 kHz)	10 Hz to 50 kHz (0.01) (When used in combination with CM7290 or CM7291: 10 Hz to 1 kHz)	10 Hz to 50 kHz (0.01) (When used in combination with CM7290 or CM7291: 10 Hz to 1 kHz)
Amplitude and phase accuracy	±1.5% rdg ±0.25% f.s. (f.s. is internal range, 45 to 66 Hz, ±1 deg)	±1.5% rdg ±0.25% f.s. (f.s. is internal range, 45 to 66 Hz, ±1 deg)	±1.5% rdg ±0.25% f.s. (f.s. is internal range, 45 to 66 Hz, ±1 deg)
Output rate	1 mV/A (6000 A), 0.1 mV/A (6000 A)	1 mV/A (6000 A), 0.1 mV/A (6000 A)	1 mV/A (6000 A), 0.1 mV/A (6000 A)
Max rated voltage to earth	600 V AC (CAT IV), 1000 V AC (CAT III)	600 V AC (CAT IV), 1000 V AC (CAT III)	600 V AC (CAT IV), 1000 V AC (CAT III)
Loop diameter	≥ 254 mm (10.00 in) or less	≥ 180 mm (7.94 in) or less	≥ 300 mm (3.94 in) or less
Dustproof, waterproof	IP54* (When sensor is connected to a compatible instrument)* Do not use when wet.	IP54* (When sensor is connected to a compatible instrument)* Do not use when wet.	IP54* (When sensor is connected to a compatible instrument)* Do not use when wet.
Output connectors	HIOKI PL 34	HIOKI PL 34	HIOKI PL 34
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)	-25 °C to 65 °C (-13 °F to 149 °F)	-25 °C to 65 °C (-13 °F to 149 °F)
Dust and water resistance*	IP54 (when connected to a compatible instrument, Do not use when wet)	IP54 (when connected to a compatible instrument, Do not use when wet)	IP54 (when connected to a compatible instrument, Do not use when wet)
Dimensions	Flexible loop cable diameter: ≥ 4 mm (0.25 in), Cable length: Between flexible loop and battery box: 2.3 m (7.55 ft), Output cable: 20 cm (0.66 ft), Battery box: 25 mm (0.98 in) W × 72 mm (2.83 in) H × 20 mm (0.79 in) D	Flexible loop cable diameter: ≥ 4 mm (0.25 in), Cable length: Between flexible loop and battery box: 2.3 m (7.55 ft), Output cable: 20 cm (0.66 ft), Battery box: 25 mm (0.98 in) W × 72 mm (2.83 in) H × 20 mm (0.79 in) D	Flexible loop cable diameter: ≥ 4 mm (0.25 in), Cable length: Between flexible loop and battery box: 2.3 m (7.55 ft), Output cable: 20 cm (0.66 ft), Battery box: 25 mm (0.98 in) W × 72 mm (2.83 in) H × 20 mm (0.79 in) D
Mass	186 g (6.6 oz)	174 g (6.1 oz)	160 g (5.6 oz)
Included accessory	Instruction manual × 1	Instruction manual × 1	Instruction manual × 1

* Water and dust resistance intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

Note: CT7040 series cannot be used alone. Use with the Display Unit CM7290, CM7291 to connect with Data Loggers and Memory 3D Connectors.
When used in combination with CM7290 or CM7291, the frequency band of current display and waveform output becomes narrow. CT7044, CT7045, and CT7046 are a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.



Current Probes

Connect to a voltage input device with a high impedance of at least 1 MΩ.

Easy to Loop Around, Even in Confined Spaces

AC FLEXIBLE CURRENT SENSOR CT9667 series



CAT II 600 V
CAT III 1000 V

- Thinner cables are easy to use in confined spaces and with complicated wiring (-01, -02)
- Shaped so that it's easy to route through complex wiring
- Easily supports large current measurements up to 5000 A
- Wide 10 Hz to 20 kHz band with excellent frequency characteristics
- Choose from three conductor diameter sizes
- Combine with Hioki power meters or Memory HiCorders (with BNC input terminals)

Model No. (Order Code):
CT9667-01 (ø100 mm (3.94 in))
CT9667-02 (ø180 mm (7.09 in))
CT9667-03 (ø254 mm (10.0 in))

Note: These current sensors may also be used with HiCorder power quality analyzers, power meters or Memory HiCorders. CT9667 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT9667-01	CT9667-02	CT9667-03
Rated input current	5000 A AC/ 500 A AC		
Max. allowable input	10000 A continuous (45 to 66 Hz, requires derating at frequency)		
Bandwidth	10 Hz to 20 kHz (A3/B)		
Amplitude and phase accuracy	±1% rdg ±0.3% Es. (45 to 66 Hz, at center of flexible loop) Phase: ±1 deg (45 to 66 Hz)		
Output voltage	500 mV AC/0.01 mV AC/0.1 mV AC/0.1 mV AC at 5000 A range 500 mV AC/0.01 mV AC/0.1 mV AC at 500 A range		
Max. rated voltage to earth	1000 V AC (CAT III), 600 V AC (CAT IV)		
Core diameter	ø100 mm (3.94 in)	ø180 mm (7.09 in)	ø254 mm (10.0 in)
Output terminal	BNC		
Operating temperature	-25 °C to +65 °C (-13 °F to 149 °F)	-25 °C to +65 °C (-13 °F to 149 °F)	-40 °C to +50 °C (-40 °F to 122 °F)
Power supply	LR6 (AA) alkaline batteries ×2, Continuous use: 7 days (rated power 25 mW), or AC adapter 9445-02-03 (rated power 0.2 W), or External power supply 5 to 15 V DC (rated power 0.17 W)		
Dust and water resistance	Flexible loop only: IP54		
Dimensions and mass	Flexible loop cable diameter: ø4 mm (0.19 in), Cable length: 0.8 m/m; Flexible loop and battery box: 2 m (6.56 ft), Output cable: 1 m (3.28 ft), Battery box: 25 mm (1.38 in)W × 120.5 mm (4.74 in) H × 34 mm (1.34 in)D, 200 g (9.9 oz)	Flexible loop cable diameter: ø4 mm (0.19 in), Cable length: Between flexible loop and battery box: 2 m (6.56 ft), Output cable: 1 m (3.28 ft), Battery box: 35 mm (1.38 in)W × 120.5 mm (4.74 in) H × 34 mm (1.34 in)D, 470 g (16.6 oz)	
Included accessories	LR6 (AA) alkaline batteries ×2, Instruction manual ×1		



CONVERSION ADAPTER 9704
Receiving side BNC (from A), output female
quality. Not compatible with older genera-
tions Memory HiCorders with female input
terminals.

Simply Connect to a Tester or Recorder to Easily Measure Large Currents

CLAMP ON PROBE 9132-50, 9010-50



CAT II 600 V

- Economical clamp sensors for waveform recording with Memory HiCorders.
- Choose from up to six general-purpose ranges

Order Code 9132-50 (BNC output terminal)
9010-50 (BNC output terminal)

Note: For commercial power lines, 50/60 Hz (separate power supply not required).

■ Basic specifications (Accuracy guaranteed for 1 year)

	9132-50	9010-50
Rated current	20 A to 1000 A AC, 6 ranges	10 A to 500 A AC, 6 ranges
Accuracy	±3% rdg, ±0.2% Es. (45 to 66 Hz)	±2% rdg, ±1% Es. (45 to 66 Hz)
Frequency characteristics	Add to amplitude accuracy for frequencies from 40 to 1 kHz: ±1% rdg	Add to amplitude accuracy for frequencies from 40 to 1 kHz: ±1% rdg Add to phase accuracy for frequencies from 40 Hz to 3 kHz: ±2.5°
Output rate	0.2 V AC/Es. (Es. = setting range) (Connect to a voltage input device providing a high input impedance of 1 MΩ)	
Max. allowable input	1000 A rms continuous (all ranges) (For 40 Hz to 50 Hz: 100%, and for 50 Hz to 1 kHz: within 90% of derating)	150 A rms continuous (10/20/50 A range) 400 A rms continuous (100/200 A range) 650 A rms continuous (500 A range) (For 40 Hz to 100 Hz: 100%, and for 100 Hz to 1 kHz: within 90% of derating)
Max. rated voltage to earth	600 Vrms (50/60 Hz, CAT III)	
Core diameter	ø55 mm (2.17 in), or 20 mm (0.79 in) × 30 mm (1.18 in) bobbin	ø46 mm (1.81 in)
Dimensions and mass	100 mm (3.94 in)W × 224 mm (8.82 in) H × 25 mm (1.38 in)D, 600 g (21.2 oz), cord length: 3 m (9.84 ft)	78 mm (3.07 in)W × 188 mm (7.40 in)H × 35 mm (1.38 in)D, 420 g (14.8 oz), cord length: 3 m (9.84 ft)
Included accessory	Instruction manual ×1	



CONVERSION ADAPTER 9704
Receiving side BNC (from A), output female
quality. Not compatible with older genera-
tions Memory HiCorders with female input
terminals.

Superior Phase Characteristics Let You Record Waveforms Accurately

CLAMP ON PROBE 9018-50



CAT II 600 V

- Choose from up to six general-purpose ranges
- Accurately record and analyze waveforms and harmonic signals

Order Code 9018-50 (BNC output terminal)

Note: For commercial power lines, 50/60 Hz (separate power supply not required).

■ Basic specifications (Accuracy guaranteed for 1 year)

	9018-50
Rated current	10 A to 500 A AC, 6 ranges
Accuracy	±1.5% rdg, ±0.1% Es. (45 to 66 Hz)
Frequency characteristics	Add to amplitude accuracy: ±1% rdg Add to phase accuracy: ±2.5° for frequencies from 40 Hz to 3 kHz
Output rate	0.2 V AC/Es. (Es. = setting range) (Connect to a voltage input device providing a high input impedance of 1 MΩ)
Max. allowable input	150 A rms continuous (10/20/50 A range) 400 A rms continuous (100/200 A range) 650 A rms continuous (500 A range) (For 40 Hz to 100 Hz: 100%, and for 100 Hz to 1 kHz: within 90% of derating)
Max. rated voltage to earth	600 Vrms (50/60 Hz, CAT III)
Core diameter	ø46 mm (1.81 in)
Dimensions and mass	78 mm (3.07 in)W × 188 mm (7.40 in)H × 35 mm (1.38 in)D, 420 g (14.8 oz), cord length: 3 m (9.84 ft)
Included accessory	Instruction manual ×1



CONVERSION ADAPTER 9704
Receiving side BNC (from A), output female
quality. Not compatible with older genera-
tions Memory HiCorders with female input
terminals.

AC Current Sensors

Connected to a voltage input device with
a high impedance of at least 1 MΩ

Sensors for Master to Branch Circuits

f.s. is the sensor's rated measurement current value.

For load currents: For the P02B00100, CTM2901T291, and similar products (PL4 terminal)

■ Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	CT7126	CT7131	CT7136	9694	9680	9661	9659
	CE CAT II 300V	CE CAT II 300V	CE CAT II 1000V CAT IV 600V	CE CAT II 300V	CE CAT II 300V	CE CAT II 1000V	CE CAT II 600V
Rated measurement current	60 A AC	100 A AC	600 A AC	5 A AC	100 A AC	500 A AC	1000 A AC
Max. measurement current	Continuous 60 A (40 to 60 Hz)	Continuous 100 A (40 to 60 Hz)	Continuous 600 A (40 to 60 Hz)	Continuous 50 A (40 to 60 Hz)	Continuous 100 A (40 to 60 Hz)	Continuous 500 A (40 to 60 Hz)	Continuous 1000 A (40 to 60 Hz)
Output rate	10 mV/A	1 mV/A	1 mV/A	10 mV AC/A	1 mV AC/A	1 mV AC/A	0.5 mV AC/A
Amplitude accuracy (40 to 60 Hz)	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.01% f.s.
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±0.5° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±2.04% at 40 Hz + 20 kHz	Within ±2.05% at 40 Hz + 20 kHz	Within ±2.54% at 40 Hz + 20 kHz	Within ±3% at 40 Hz + 5 kHz (deviation from amplitude accuracy)	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)
Max. rated voltage to earth	300 V AC rms or less	1000 V AC rms or less	1000 V AC rms or less	300 V AC rms or less	600 V AC rms or less	600 V AC rms or less	600 V AC rms or less
Measurable conductor diameter	≤ 15 mm (0.59 in) or less	≤ 46 mm (1.81 in) or less	≤ 46 mm (1.81 in) or less	≤ 15 mm (0.59 in) or less	≤ 46 mm (1.81 in) or less	≤ 55 mm (2.17 in) or less	≤ 55 mm (2.17 in) or less
Operating temperature and humidity	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)
Dustproof and waterproof	IP40 (IEC60529) (with sensor connected and jaw closed)	IP40 (IEC60529) (with sensor connected and jaw closed)	IP40 (IEC60529) (with sensor connected and jaw closed)	IP40	IP40	IP40	IP40
Dimensions and mass	46 mm (1.81 in)W × 105 mm (3.31 in)H × 21 mm (0.83 in)D, 199 g (0.7 oz)	56 mm (2.17 in)W × 152 mm (5.91 in)H × 21 mm (0.83 in)D, 236 g (0.51 oz)	76 mm (3.00 in)W × 152 mm (5.91 in)H × 21 mm (0.83 in)D, 260 g (0.56 oz)	76 mm (3.00 in)W × 152 mm (5.91 in)H × 21 mm (0.83 in)D, 260 g (0.56 oz)	76 mm (3.00 in)W × 152 mm (5.91 in)H × 21 mm (0.83 in)D, 260 g (0.56 oz)	76 mm (3.00 in)W × 152 mm (5.91 in)H × 21 mm (0.83 in)D, 260 g (0.56 oz)	76 mm (3.00 in)W × 152 mm (5.91 in)H × 21 mm (0.83 in)D, 260 g (0.56 oz)
Cable length 2.5 m (8.20 ft) (there is no optional extension cable). Output terminal: PL4				Cable length 3 m (9.84 ft). Output terminal: BNC			

For leak currents: For the P02B001 (PL4 terminal) and similar products (BNC terminal)

■ Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	CT7116	9675	9657-10	9695-02	9695-03
	General-purpose ZCT insulated conductor	Branch circuit ZCT insulated conductor	General-purpose ZCT insulated conductor	Not CE Marked CAT II 300V For 9695-03 (Requires the 9219)	Not CE Marked CAT II 300V For 9695-02 (Requires the 9219)
Rated measurement current	6 A AC	10 A AC (for leak current measurement, 50/60 Hz)	10 A AC (for leak current measurement, 50/60 Hz)	50 A AC	100 A AC
Max. measurement current (40 to 60 Hz)	Continuous 10 A	Continuous 10 A	Continuous 30 A	Continuous 60 A (40 to 60 Hz)	Continuous 100 A (40 to 60 Hz)
Output rate	100 mV AC/A	100 mV AC/A	100 mV AC/A	10 mV AC/A	1 mV AC/A
Amplitude accuracy (40 to 60 Hz)	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.05% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.02% f.s.
Phase accuracy (40 to 60 Hz)	±3° or less	±5° or less	±3° or less	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	40 Hz to 5 kHz	40 Hz to 5 kHz, ±5%	40 Hz to 5 kHz, ±3%	40 Hz to 5 kHz, ±5%	40 Hz to 5 kHz, ±5%
Residual current characteristics	Max. 5 mA (in 10 A go and return electric wire)	Max. 1 mA (in 10 A go and return electric wire)	Max. 5 mA (in 10 A go and return electric wire)	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)
Effect of external magnetic field (400 A/m, 50 Hz / 60 Hz)	Corresponding to 5 mA 7.5 mA max.	7.5 mA max.	Corresponding to 5 mA 7.5 mA max.	300 V AC rms or less (insulated conductor)	300 V AC rms or less (insulated conductor)
Measurable conductor diameter	≤ 40 mm (1.57 in) or less (insulated conductor)	≤ 20 mm (0.78 in) or less	≤ 40 mm (1.57 in) or less	≤ 15 mm (0.59 in) or less	≤ 15 mm (0.59 in) or less
Operating temperature and humidity	-25°C to 45°C (-13°F to 113°F), 80% RH or less (no condensation)	-5°C to 50°C (23°F to 122°F), 80% RH or less (no condensation)	-5°C to 50°C (23°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	-20°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)
Dustproof, waterproof	IP40 (with sensor connected and jaw closed)	No regulation	No regulation	56.5 mm (2.19 in)W × 55 mm (2.16 in)H × 33.7 mm (1.33 in)D, 360 g (0.80 lb)	Output terminal: MC-terminal (grade 3), 0.02 inch diameter Option: Connection cable 9219 (0.8 m, 0.84 ft length)
Dimensions and mass	74 mm (2.91 in)W × 148 mm (5.81 in)H × 42 mm (1.65 in)D, 360 g (0.80 lb)	80 mm (3.15 in)W × 112.5 mm (4.42 in)H × 21.6 mm (0.85 in)D, 360 g (0.80 lb)	74 mm (2.91 in)W × 148 mm (5.81 in)H × 42 mm (1.65 in)D, 360 g (0.80 lb)	Cord length 3 m (9.84 ft)	Cord length 3 m (9.84 ft)

For load currents: For the PWT100 and similar products

■ Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	9695-02	9695-03
	Insulated conductor	Insulated conductor
Rated measurement current	50 A AC	100 A AC
Max. measurement current	Continuous 60 A (40 to 60 Hz)	Continuous 100 A (40 to 60 Hz)
Output rate	10 mV AC/A	1 mV AC/A
Amplitude accuracy (40 to 60 Hz)	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.02% f.s.
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)	Within ±2% at 40 Hz + 5 kHz (deviation from amplitude accuracy)
Max. rated voltage to earth	300 V AC rms (insulated wire)	300 V AC rms (insulated wire)
Core jaw dia.	≤ 55 mm (2.17 in) or 80 mm (3.15 in) = 20 mm (0.79 in) bus-bar	≤ 55 mm (2.17 in) or 80 mm (3.15 in) = 20 mm (0.79 in) bus-bar
Dimensions and mass	99.5 mm (3.92 in)W × 198 mm (7.81 in)H × 42 mm (1.65 in)D, 560 g (1.21 lb)	99.5 mm (3.92 in)W × 198 mm (7.81 in)H × 42 mm (1.65 in)D, 560 g (1.21 lb)

f.s. is the meter's rated measurement current value.

● 9695 OPTION CONNECTION CABLE 9219

Crossed with the 9695-02/-03, Output BNC terminal, 3 m (9.84 ft) length



Clamp-type CT that enables measurement in excess of 1000 A (clamp ammeter option/AC use only)

CLAMP ON ADAPTER 9290-10



- Outputs large currents of 1000 A AC continuously (1500 A for 5 minutes) at a CT ratio of 10:1
- Expands the measurement range of normal clamp ammeters
- Excellent phase characteristics; also used to expand power meter measurement ranges

■ Basic specifications (Accuracy guaranteed for 1 year)

Rated primary current	AC 1000 A continuous (Maximum 1500 A for 5 minutes or shorter)
Rated secondary current	AC 100 A (10 : 1 CT ratio)
Amplitude accuracy	±1.9% rdg
Phase accuracy	±1.0° or less
Frequency characteristics	Amplitude: 20 Hz to 5 kHz: ±2.0% rdg (deviation from accuracy) Phase: 20 Hz to 5 kHz: ±1.0° or less (deviation from accuracy)
Max. rated voltage to earth	600 V AC rms (insulated wire)
Cord jaw dia.	≤ 55 mm (2.17 in) or 80 mm (3.15 in) = 20 mm (0.79 in) bus-bar
Dimensions and mass	99.5 mm (3.92 in)W × 198 mm (7.81 in)H × 42 mm (1.65 in)D, 560 g (1.21 lb)
Included accessories	Instruction manual x1, Mask band x1
Note:	Cannot use with Model 9279

A LAN Cable Tester Capable of Identifying the Location of Wire Breaks

LAN CABLE HiTESTER 3665



CE



Optional accessories

TERMINATOR 9690
ID 6-14CARRYING CASE
Stores the 3665-20
and 9690

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurable cable	Twisted-pair cable, characteristic impedance: 100 Ω, shielded and unshielded, CAT 3, 4, 5, 5e, 6 and 6A
Compatible connector	RJ-45 plug
Wire Map test	Detectable errors: open, short, reversed, transposed, split pairs and other incorrect wiring. (Wiring condition and shielding can be confirmed using the Terminator 9690)
Cable length measurement	Measurable lengths: 2 m to 300 m (6.6 ft to 984 ft) Measurement accuracy: ± 4%+1 digit ± 1 m (3.3 ft) (condition of regulation: single wire) Display resolution: 0.1 m (0.3 ft)
Direction measurement	Up to 21 cables can be identified using the applied Terminator 9690 and optional Models 9690-01 to 9690-04
Power supply	LR6 (AA) alkaline battery ×2, 1.4 V A max., Continuous use: 50 hr (at measurement interval of 1 minute)
Dimensions and mass	85 mm (3.35 in) W × 130 mm (5.12 in) H × 33 mm (1.30 in) D, 360 g (5.6 oz) (without batteries)
Included accessories	Terminator 9690 ×4, Carrying case ×1, LR6 (AA) alkaline battery ×2, Instruction manual ×1

- Wire map check : Detect split pairs with wiring check
- Cable length : Get NVP-Enhanced measurement accuracy
- Direction check : Identify up to 21 cable destinations

Model No. (Order Code) 3665-20 (English model)

Note: For direction checks enabling individual wires to be identified, please purchase optional Terminators 9690-01 to -04.



Options

TERMINATOR
9690-01
ID 1 to 5, 5 piece setTERMINATOR
9690-02
ID 6 to 10, 5 piece setTERMINATOR
9690-03
ID 11 to 15, 5 piece setTERMINATOR
9690-04
ID 16 to 20, 5 piece setCARRYING CASE
9649
Stores the main unit
and options together

Inspect Solar Panel Bypass Diodes for Opens and Shorts in Broad Daylight Without Covering Panels

BYPASS DIODE TESTER FT4310



Bluetooth®

- Test for open or short-circuit bypass diodes even during the day¹⁾
- Easily test using the strings in the junction boxes²⁾
- Save time - simultaneously measure all electrical parameters³⁾
- Automatically transfer data wirelessly (Available for Android and iOS devices)⁴⁾

¹⁾ Testing can also be performed at night. Testing for short-circuit faults can only be performed during the day.

²⁾ There is no need to climb onto the roof and dramatically improving work efficiency.

³⁾ Measure open-circuit voltage, short-circuit current, and bypass route resistance and display all three values at once.

⁴⁾ Automatically transfer data with Bluetooth® wireless technology

Model No. (Item Code) FT4310 (Built-in Bluetooth® wireless technology)

Note: The FT4310 cannot measure strings installed in parallel. Please contact HIOKI for more information.

■ Data can be downloaded to tablets and smartphones using HIOKI's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



HIOKI, Google Play and the Google Play logo are trademarks of Google Inc. HIOKI is a registered trademark of HIOKI Technology Inc. and/or its affiliates in the United States and certain other countries.

¹⁾ Patent number: 6,744,265. Other patents and trade secrets are also included.

²⁾ Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

³⁾ Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

⁴⁾ Company names and product names appearing in this catalog are trademarks or registered trademarks of various companies.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and used by HIOKI K.K. CORPORATION under license.

⁵⁾ For the latest information about countries and regions where wireless operation is currently supported, please visit the HIOKI website.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items Open-circuit voltage, Short-circuit current, Bypass route resistor

[BPD TEST mode]

Measurement items	Bypass diode comparator judgment, Bypass route resistor, Open-circuit voltage, Short-circuit current, Measurement (applied) current
Measurement object	Crystalline system string
Measurement method	Short-circuit and pulse voltage application
Measurement accuracy	Open-circuit voltage: ±0.2%rdg ±3 digit (at 0 to ±3000 V) Short-circuit current: ±3%rdg ±3 digit (at 0.0 to 15.0 A) Bypass route resistance: ±5%rdg ±5 digit (at 0.0 to 15.0 Ω). During pure resistance measurement
Measurement time	2 s or less (3 seconds or less when measurement voltage is 10 V or less)
Possible number of measurements	3000 times (Comparator, backlight, Bluetooth® OFF) LR6 Alkaline battery × 6

[Voc mode]

Measurement items	Open-circuit voltage
Measurement range	0 V to 1000 V DC (Displayed up to 1200 V DC). Accuracy: ±0.2%rdg ±3 digit
Response time	Within 1 sec.

[General]

Output and waterproof	IP40 (IEC60529)
Functions	Displays the number of bypass diode measurements, Automatic polarity judgment, Function, Comparison display, Auto hold, Live circuit indicator, Buzzer sound, Backlight, Comparator, Battery indicator, Auto power off, Bluetooth® wireless technology
Interface	Bluetooth® 4.0 LE, Display of measured values on an iOS or Android handset
Power supply	LR6 (AA) alkaline battery × 6, Maximum rated power 18 VA Continuous operating time: 45 hours (Comparator, backlight, Bluetooth® OFF)
Dimensions and mass	152W×92H×69D mm (5.98 W × 3.62 H × 2.72 D in) 630 g (22.9 oz) (including batteries, excluding test leads)



Easily inspect bypass diodes for open and short-circuit faults even in broad daylight

Reference

Issues caused by faulty bypass diodes

Normal reading: Current is routed around panels that are covered by shadows



When a solar panel is obscured by a partial shadow (or when it fails), the current bypasses the panel in order to prevent any drop-off in generating efficiency.

Short-circuit fault: Generating capacity falls



When a short-circuit fault occurs, the generated current flows in a loop, making it impossible to capture the generated power, resulting in lowered efficiency.

Open fault: Potential fire



When an open fault occurs, current is forced to flow to the defective cell when it's covered by a shadow, causing the panel to heat up and posing the risk of fire.

Environmental Measuring

Non-Contact Infrared Thermometer Featuring Simple, One-Touch Measurement

INFRARED THERMOMETER FT3700, FT3701



CE



- Pistol design with easy-to-see display
- A full menu of basic measuring functions
- Easily test in difficult locations, moving objects or where there is danger of electric shock

Model No. (Order Code) FT3700-20 (Long-focus type)
FT3701-20 (Long-focus, precise-field type)


Note: Laser Product Caution Notice
A caution label is attached to the thermometer. Be sure to observe the operating precautions on the label.



■ Basic specifications (Accuracy guaranteed for 1 year)

	FT3700-20	FT3701-20
Measurement temperature range	-60.0 to 550.0 °C (-76 to 1022 °F), 0.1 °C resolution	-60.0 to 760.0 °C (-76 to 1400 °F), 0.1 °C resolution
Accuracy	-35.0 to -0.1 °C (-31.0 to 31.9 °F): ±10%rdg±2 °C 0.0 to 100.0 °C (-32.0 to 212.0 °F): ±2 °C 100.1 to 500.0 °C (212.1 to 932.0 °F): ±2% rdg Rate: -60.0 to -55.0 °C (-76 to -67.0 °F) and over 500.1 °C (920.0 °F): Accuracy not specified	
Response time	1 sec (50%)	
Measurement wavelength	8 to 14 μm	
Thermal emissivity compensation	e=0.30 to 1.00 (0.01 step)	
Measurement field diameter	φ 60 mm at 1000 mm (0.27 in at 3.28 ft) (Distance: Spot = 32 : 1) φ 300 mm at 3000 mm (3.94 in at 9.84 ft) (Distance: Spot = 20 : 1)	
Sighting	Two-beam laser marker Max 1 mW (class 2, Red)	
Functions	Continuous measurement mode, MAX/MIN/DIF (MAX - MIN)/AVG measurement, Alarm, Backlight, Auto power-off	
Power supply	LR03 (AAA) alkaline battery ×2, 150 mVA, Continuous use of 140 hours (With laser marker, backlight and buzzer off ON)	
Dimensions and mass	48 mm (1.89 in)W × 172 mm (6.73 in)H × 119 mm (4.69 in)D, 256 g (9.0 oz), (Excluding batteries)	
Included accessories	Instruction manual ×1, LR03 alkaline battery ×2, Carrying case ×1	

F T3700-20 Measurement distance and field diameter

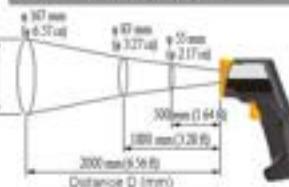

F T3701-20 Measurement distance and field diameter



Robust Support for 3-Axis Magnetic Flux Density Measurement

MAGNETIC FIELD HIESTER FT3470



- Complies with ICNIRP 2010 guidelines as well as other relevant standards for evaluation testing.
- Complies with IEC 62110/IEEE 644 as well as IEC 62233.
- Bundled with 3 cm² Sensor used for magnetic field distribution analysis, and 100 cm² Sensor used with the IEC/EN 62233 standard analysis.
- User-selectable display units (T, A/m, and G).
- Simple operation for easy measurement.
- Bundled with PC application software.
- Level output for RMS value, or 3-axis waveform output for magnetic fields.



100 cm² Sensor
(FT3470-51 and FT3470-52 bundled)
Cross-sectional area: 100 cm², Standard sensor for use with the IEC/EN 62233 standard.



3 cm² Sensor
(FT3470-52 only bundled)
Cross-sectional area: 3 cm², Enables detailed analysis of magnetic field distribution on measurement targets.

Model No. (Order Code) FT3470-51 (100 cm² Sensor bundled)
FT3470-52 (100 cm² Sensor, 3 cm² Sensor bundled)

■ Basic specifications (Accuracy guaranteed for 1 year)

Magnetic flux density (Bandwidth)	10 Hz to 400 kHz/ 10 Hz to 2 kHz/ 2 kHz to 400 kHz
Exposure level	General Public/ Occupational
Display	Single axes X, Y, Z (2000 counts), Composite RMS value R (2464 counts), Magnetic flux density (unit: T, G, A/m), Exposure level (unit: %)
Magnetic flux density/ Range, Accuracy	[X, Y, Z axes] Effective measuring ranges: 2.000 μT to 1.000 mT, 4 ranges, Accuracy: ±3.5%rdg±0.5%fa. [R axis] Effective measuring ranges: 3.464 μT to 3.464 mT, 4 ranges, Accuracy: ±3.5%rdg±0.5%fa. [Valid measurement frequency range] at 10 Hz-400 kHz mode: 50 Hz to 100 kHz, at 10 Hz-2 kHz mode: 50 Hz to 1 kHz, at 2 kHz-400 kHz mode: 5 kHz to 100 kHz
Exposure level/ Range, Accuracy	[X, Y, Z axes] Effective measuring ranges: 20.00 % to 200.0 %, 2 ranges [R axis] Effective measuring ranges: 34.64 % to 346.4 %, 2 ranges, Accuracy: Smoothed edges 50 Hz to 1 kHz: ±3.5%rdg±0.5%fa. Accuracy: Smoothed edges 1 kHz to 100 kHz: ±5.0%rdg±0.5%fa.
Interfaces	[Supporting output]: Residual RMS level output, Exposure level output, Waveform output of magnetic flux density X/Y/Z, each axis, Output rate: 8.1 mV/Display value count [USB]: Data string with the PC application
Other functions	Memory function: Up to 99 measured value data, Slow function, Holds the maximum value, Auto power off, Buzzer sound on/off
Power supply	LR6 (AA) alkaline battery ×4, 0.8 VA (at battery operation), Continuous use of 10 hr, or AC adapter 9445-02 (1.0 VA max. consumption)
Dimensions and mass	Main unit: 100 mm (3.94 in)W × 150 mm (5.91 in)H × 42 mm (1.65 in)D, 800 g (1.76 lb), (including batteries) 100 cm ² Sensor: φ122 mm (4.8 in) × 205 mm (8.0 in)L, 220 g (7.8 oz) 3 cm ² Sensor: φ27 mm (1.06 in) × 165 mm (6.50 in)L, 95g (0.4 oz)
Included accessories for the FT3470-51	100 cm ² Sensor ×1, Instruction manual ×1, CD-R (PC application software Data Viewer for FT3470) ×1, USB cable ×1, LR6 (AA) alkaline battery ×4, AC adapter 9445-02 ×1, Carrying case ×1
Included accessories for the FT3470-52	100 cm ² Sensor ×1, 3 cm ² Sensor ×1, Instruction manual ×1, CD-R (PC application software Data Viewer for FT3470) ×1, USB cable ×1, LR6 (AA) alkaline battery ×4, AC adapter 9445-02 ×1, Extension cable 9758 ×1, Output cable 9759 ×1, Carrying case ×1

■ Bundled PC application software (DATA VIEWER for the FT3470)

Operating environment	Computer running under Windows 7 (32/64-bit), Vista (32/64-bit), XP
Functions	RMS value data logging/ Save to a PC in a batch, CSV file format

EXTENSION CABLE 9758	OUTPUT CABLE 9759	AC ADAPTER 9445-02
1.5 m (4.92 ft) length, to extendable length of the sensor to the maximum	1.5 m (4.92 ft) length, with 3.8MM connectors on the output end	100 to 240 V AC

Environmental Measuring

High Reliability LUX METER Series, Complies with DIN Class B and JIS Class AA, Compatible with LED/OLED Lighting LUX METER FT3424, FT3425



FT3424

FT3425
Bluetooth®

Sensor unit and main display can be separated. Sold separately.



- Measured illuminance data is automatically sent to smartphone or tablet with Bluetooth® wireless technology (FT3425)
- Compatible with LED/OLED lighting
- Complies with DIN 5032-7:1985 class B and JIS C 1609-1:2006 general AA class
- Timer hold function lets you make measurements in remote locations while avoiding the effects of shadows and reflections
- Save up to 99 measured values in the instrument's internal memory and transfer them to a computer later for improved work efficiency

Model No. (Order Code) **FT3424**

FT3425 (Built in Bluetooth® wireless technology).

■ Basic specifications (Accuracy guaranteed for 2 years)

Standards	DIN 5032-7:1985 class B, JIS C 1609-1:2006 general AA class
Light receiving element	Silicon photo diode
Range selection	Auto / Manual
Linearity	±2%rdg. (Multiply by 1.5 for display values in excess of 3000 lx.)
Accuracy guarantee for temperature and humidity	21 °C to 27 °C (69.8 °F to 80.6 °F), 75%rh or less (no condensing)
Response time	Auto range: within 5 seconds, Manual range: within 2 seconds
D/A output	Output level: 2 V/range Ex. (2.5 V is output when the range f.s. is exceeded) Output accuracy: ±1%rdg. ±5 mV (at display count)
Functions	Timer hold function, Memory function (Up to 99 measured data can be saved), Hold, Auto power off, Beeper sound, Backlight, Zero adjustment
Interfaces	USB 2.0 (FT3424/FT3425), Bluetooth® 4.0LE (FT3425 only)
Power supply	LR6 Alkaline battery ×2, Max. rated power 500 mVA, or R6 Manganese battery ×2, or USB bus power (5 VDC)
Continuous battery operation time	300 hours (when using LR6 batteries, with Bluetooth® OFF), 80 hours (when using R6 batteries, with Bluetooth® ON)
Dimensions and mass (including the batteries)	78 mm (3.07 in)W × 170 mm (6.69 in)H × 39 mm (1.54 in)D, 310 g (10.9 oz, FT3424) / 320 g (11.3 oz, FT3425)

Only FT3425 is equipped with Bluetooth® wireless technology, others are shared specifications.

■ Measurement ranges

Range	Measurement range	Display steps
20 lx	0.00 lx to 20.00 lx	1 count step
200 lx	0.0 lx to 200.0 lx	1 count step
2000 lx	0 lx to 2000 lx	1 count step
20000 lx	0 lx to 20000 lx	10 count step
200000 lx	0 lx to 20000 lx	100 count step

■ Data can be downloaded to tablets and smartphones using Hikoki's dedicated apps available from the Google Play or App Store. (FT3425 only)
Search for "HIKOKI" and download the "GENNECT Cloud" app.



Options



EXTENSION CART
Z5003
The cart with case wheels can be easily moved between measurement locations.



CONNECTION CABLE
L9820
Use when you angle sensor unit and display unit separately during use. 2 m (6.6 ft) length.



OUTPUT CORD L9094
3.5mm (1/8 in) dia. mini plug
1.5 m (4.9 ft) length.



OUTPUT CORD L9095
Connector BMC terminal,
1.5 m (4.9 ft) length.



OUTPUT CORD L9096
Current transformer probe,
1.5 m (4.9 ft) length.



CARRYING CASE
C0202
Soft case



CARRYING CASE
C0201
Glossy black case

C0201 For measuring instruments with the CONNECTION CABLE, OUTPUT CORD, and CORD.

C0202 For sensor unit connected with CONNECTION CABLE, OUTPUT CORD, and CORD.

Digital Multimeters/Testers

World's Premier Digital Multimeter! Superior Accuracy and High Response, Topped with Safety Terminal Shutters

DIGITAL MULTIMETER DT4281, DT4282



DT4281



DT4282

- 60000 count, 5-digit display, high-resolution measurements
- $\pm 0.025\%$ DC V basic accuracy, wide 20 Hz to 100 kHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveform)
- Includes multiple measurement functions such as DC+ACV, temperature, capacitance, and frequency
- Terminal shutter mechanism (prevents simultaneous test lead insertion)
- Measures large currents with optional clamp probe (only for DT4281, which has no 10 A terminal for accident prevention)
- Measure up to 10A with direct input (DT4282 only)
- Dual display lets you check voltage and frequency simultaneously
- Magnetic strap (Optional)
- Rear kickstand
- Store probes at the back of the tester
- Identify excessively high input with a red screen backlight
- Robust design capable of withstanding a drop from a height of 1 m
- USB communications function supports PC measurements (optional)
- Broad -15 (5°F) to 55°C (131°F) operating temperature range

Model No. (Order Code) DT4281
DT4282

(Direct and current clamp input terminal)
(10 A direct input)

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DT4281	DT4282
DC Voltage range	60.000 mV to 1000.0 V, 6 ranges, Basic accuracy: $\pm 0.025\%$ rdg. ± 2 digit	
AC Voltage* range	60.000 mV to 1000.0 V, 6 ranges, Frequency characteristic: 20 Hz - 100 kHz Basic accuracy 45 - 65 Hz: $\pm 0.2\%$ rdg. ± 5 digit (True RMS, crest factor 3)	
DC + AC Voltage* range	6.0000 V to 1000.0 V, 4 ranges, Frequency characteristic: 20 Hz - 100 kHz Basic accuracy 45 - 65 Hz: $\pm 0.31\%$ rdg. ± 10 digit (True RMS, crest factor 3)	
Resistance range	60.000 Ω to 600.0 M Ω , 8 ranges, (Condutance: 600.0 mS, DT4282 only) Basic accuracy: $\pm 0.03\%$ rdg. ± 2 digit	
DC Current range	600.00 μ A to 600.0 mA, 4 ranges Basic accuracy: $\pm 0.05\%$ rdg. ± 5 digit	600.00 μ A to 10.000 A, 6 ranges
AC Current* range	600.00 μ A to 600.0 mA, 4 ranges Basic accuracy 45 - 65 Hz: $\pm 0.6\%$ rdg. ± 5 digit (True RMS, crest factor 3) Frequency characteristic: 20 Hz - 20 kHz ($\pm 600 \mu$ A to 60.0 A ranges)	600.00 μ A to 10.000 A, 6 ranges
AC Current* range (use with Clamp on probe)	10.00 A to 1000 A, 7 ranges Add the Clamp on probe accuracy to Basic accuracy 45 - 65 Hz: $\pm 0.6\%$ rdg. ± 42 digit (True RMS, crest factor 3)	N/A
Peak	DCV measurement: 3 digital width 4 msec or more (single), 1 msec or more (repeated) ACV, DCmA, A measurement: digital width 1 msec (repetitive), 250 msec or more (single)	
Capacitance range	1.000 nF to 100.0 mF, 9 ranges, Basic accuracy: $\pm 1.0\%$ rdg. ± 5 digit	
Continuity check	Continuity threshold: 20/50/100/500 Ω , Response time: 10 ms or more	
Diode test	Open terminal voltage: 4.5 V or less, Testing current 12 mA or less, Threshold of forward voltage: 0.15 V to 3 V, seven stages	
Frequency range	ACV, DC+ACV, AC/A measurement: at pulse width 1 μ s or more (50% duty ratio) 99.999 (0.5 Hz or more) to 50.00 kHz, 5 ranges, $\pm 0.05\%$ rdg. ± 3 digit	
dB conversion	Standard impedance setting (100 Ω), 40 Ω to 1000 Ω , 20 stages Display dB conversion value of AC voltage (dBV)	
Temperature (thermocouples)	K, -40.0 °C to 130.0 °C (-40.0 °F to 142.0 °F) Add accuracy of the Thermocouple probe to main unit accuracy: $\pm 0.5\%$ rdg. ± 3 °C	
Other functions	Filter function: Harmonic analysis, use only at 600 VDC, 1000VAC ranges, Display value hold, Auto Sel, 4 Multi-line value display, Sampling select, Peak/val display, Measurement memory(400 data), Auto-power save, USB communication (optional), 4-20 mA conversion	
Display	Main and Sub display: 5 digits LCD, max. 60000 digits	
Display refresh rates	5 times/second (voltage measurement), 1/10 sec., 1 reading per minute (diode, Temperature 1 times)	
Power supply	LR6 (AA) alkaline batteries $\times 4$, Continuous use: 100 hours	
Dimensions and mass	97 mm (3.86 in)/W = 197 mm (7.76 in)/H = 53 mm (2.09 in)/D, 650 g (22.9 oz) (including test lead holder and batteries)	
Included accessories	Test lead L9207-10 \times 4, Instruction manual \times 1, LR6 alkaline battery $\times 4$	

*Zero-suppression: For small inputs below the guarantee range, zero is effectively displayed

Shared options for the DT4280 series, DT4261, DT4250 series



TEST LEAD
L9207-10
90 cm (35.4 in) length
95 cm (37.4 in) length
Protective clip and protective finger guard



CONTACT PIN SET
L4903
Attaches to the tip of the Test Lead L9207-10/L9300/DT4280/
L9204, 60V CAT II 600V, CAT III 600V

SMALL ALLIGATOR CLIP
SET L4904
Attaches to the tip of the L4903



CLAMP ON PROBE
9010-50
10 to 500 AAC, 90 mm
(3.54 in), 3 m (9.84 ft)
length

CLAMP ON PROBE
9018-50
Wide band type, 10 to 500
AAC, 40 mm (1.57 in),
3 m (9.84 ft) length

CLAMP ON PROBE
9132-50
20 to 1000 AAC, 90 mm (3.54 in),
90 to 500 mm (3.54 to 19.69 in),
3 m (9.84 ft) length

CONVERSION
ADAPTER
9704
Receiving end: TRMS 3000,
Output end: 10A 1000V, CAT III 1000V
*Not compatible with other generation DT4200, DT4250/60 with banana input terminals



CONNECTION
CABLE SET L4930
12.0 (0.930) length, CAT
II 1000V, CAT III 1000V
12.0 (0.930) length

EXTENSION CABLE
SET L4931
Depends the length of the
L4930 (1.0 to 1.13 m (3.93 to 4.37 ft) length)



TEST PIN SET
L4902
Attaches to the tip of the L4903
L4904, 60V CAT II 600V,
CAT III 600V, CAT IV 600V

SMALL ALLIGATOR CLIP
SET L4904
Attaches to the tip of the L4902



ALIATOR CLIP
SET L4935
Attaches to the tip of the L4903
L4904, 60V CAT II 600V,
CAT III 600V

BUS BAR CLIP
SET L4936
Attaches to the tip of the L4903
L4904, 60V CAT II 600V,
CAT III 600V

MAGNETIC ADAPTER
9804
Attaches to the tip of the
L4903/L4904, 60V
CAT III 600V, compatible with
Magnet Adapter 9803

TEST PIN
SET L4908
Attaches to the tip of the
L4903/L4904, 60V
CAT III 600V

BREAKER PIN
SET L4939
Attaches to the tip of the
L4903/L4904, 60V
CAT III 600V

GRABBER CLIP
L9243
Attaches to the tip of the
L4903/L4904, 60V
CAT III 600V, 100 cm (39.37 in)
length



THERMOCOUPLES (K) DT4910
K-type, tip exposed, 0.5 mm (0.02 in)
diameter, 100 cm (39.37 in) length, -40 to 300 °C
(-40 to 572 °F)



COMMUNICATION PACKAGE (USB)
DT4900-01
Compatible to Windows 10




MAGNETIC STRAP
Z5020
Extra strength

CARRYING CASE
C0202
Bag type

CARRYING CASE
C0201
Briefcase type

Ideal for checking ripple voltage in DC supply systems




Peak measurement function & DC+AC voltage measurement
Captures ripple voltage component on direct current signals.



Optimized for inverter system measurements



Low-pass filter cuts harmonic waveform components
The (1 kHz cut-off) low-pass filter function cuts high harmonic components when measuring the secondary output voltage of an inverter.

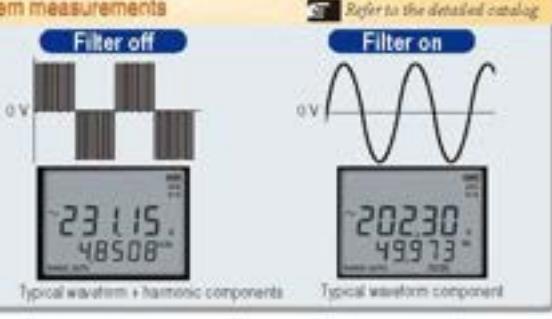

Digital Multimeters/Testers

Analyzing Issues in the Field and Dramatically Improving Work Efficiency

DIGITAL MULTIMETER DT4261



DT4261

USB
OptionCAT II 600 V
CAT III 1000 V

True RMS

When Z3210 is
installed

Bluetooth®

- Capable of measuring up to cat III 2000 V with DC HIGH VOLTAGE PROBE P2000¹ Dramatically improves the safety of maintenance of large-scale solar power generation facilities
- Helping personnel analyze issues in the field
- Stop worrying about losing test lead caps
- Boost work efficiency with digitalization (Excel® Direct Input Function)
- Excellent dust and water resistance (compliant with the IP64 international standard)
- Ensuring safety by preventing erroneous test lead insertion (terminal shutters)

Model No. (Order Code) DT4261 (Without Wireless Adapter Z3210 is not available)

(With Wireless Adapter Z3210 is available)

■ Data can be downloaded to tablets and smartphones using HIOKI dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.HIOKI, Google Play and the Google Play logo are trademarks of Google Inc.©2016 HIOKI Corporation of America. All rights reserved in the United States and various other countries.1. These cat. I, II, III, and IV are registered trademarks or trademarks of Apple Inc.Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.Microsoft, Windows, Windows Phone, and Silverlight are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.The Bluetooth® word mark and logo are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.I. CORPORATION is under license.Please refer to information about countries and regions where wireless operation is currently supported, please visit the HIOKI website.Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.**■ Basic specifications (Accuracy guaranteed for 1 year)**

DC Voltage range	600.0 mV to 1000 V, 5 ranges, Basic accuracy: ±0.1% rdg. ±2 digit.
AC Voltage range	6000 V to 1000 V, 4 ranges, Frequency characteristic: 40 Hz to 1 kHz; Basic accuracy 40 Hz - 500 Hz: ±0.9% rdg. ±3 digit. (True RMS, crest factor 3 or less)
DC + AC Voltage range	6000 V to 1000 V, 4 ranges, Frequency characteristic: DC, 40 Hz to 1 kHz; Basic accuracy DC, 40 Hz - 500 Hz: ±0.9% rdg. ±3 digit. (True RMS, crest factor 3 or less)
LoZ V	600.0 V, 1 range, Frequency characteristic: DC, 40 Hz to 1 kHz; Basic accuracy DC, 40 Hz - 500 Hz: ±0.9% rdg. ±3 digit. (True RMS, crest factor 3 or less)
Resistance range	600.0 Ω to 60 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg. ±3 digit.
DC Current range	600.0 mA to 10.0 A, 3 ranges Basic accuracy: ±0.2% rdg. ±3 digit.
AC Current range	600.0 mA to 10.0 A, 3 ranges Basic accuracy 40 Hz - 500 Hz: ±1.4% rdg. ±3 digit. (True RMS, crest factor 3 or less) Frequency characteristic: 40 Hz to 1 kHz
AC Current range (use with Clamp on probe)	10.0 A to 1000 A, 7 ranges Basic accuracy 40 Hz - 500 Hz: Add the Clamp on probe accuracy to ±0.9% rdg. ±3 digit. (True RMS, crest factor 3 or less)
Capacitance range	1.000 pF to 10.0 mF, 5 ranges, Basic accuracy: ±1.9% rdg. ±5 digit.
Continuity Check	Continuity threshold ON: 25 Ω, Continuity threshold OFF: 245 Ω, Response time: 0.5 ms or more
Diode test	Open terminal voltage: 2.0 V or less, Testing current: 0.2 mA or less, Threshold of forward voltage: 0.15 V to 1.8V
Voltage frequency range	99.9 Hz to 99.9 kHz, 4 ranges (Limited by minimum sensitivity voltage) Basic accuracy: ±0.1% rdg. ±1 digit.
Current frequency range	99.9 Hz to 9.999 kHz, 3 ranges (Limited by minimum sensitivity current) Basic accuracy: ±0.1% rdg. ±1 digit.
Other functions	Mis-insertion prevention shutter, fuse check function, user setting retention function, filter function, zero-adjustment, display value hold, auto-hold, MAX/MIN value display, PEAK value display, auto-power save, U2 communication (when optional Communication Package DT4900-01 is installed), wireless communication (when optional Wireless Adapter Z3210 is installed)
Display	Main and sub displays: 4-digits LCD, max. 6000 digits (excluding frequency measurement), bar-graph
Display refresh rates	5 times/s (Capacitance measurement: 0.25 to 5 times/s, depending on measured value, Frequency: 1 to 26 mHz)
Power supply	LR6 (AA) alkaline batteries × 3, Continuous operating time: 130 hr. (without Z3210 installed), 70 hr. (with Z3210 installed and using wireless communication)
Dimensions and mass	87 mm (3.43 in.) W × 185 mm (7.28 in.) H × 47 mm (1.85 in.) D, 490 g (0.88 lb.) (with test leads holder and batteries)
Included accessories	Test Lead L3900 × 1, Instruction Manual × 1, LR6 (AA) alkaline battery × 3, Operating Precautions × 1

Option for DT4261GENNECT Cross
SF4071, SF4072
Mobile app for iOS, AndroidDMM
TESTERS**Bluetooth® communication with Z3210 attached to DT4261**

Refer to the detailed catalog


Install the Wireless Adapter Z3210 to the DT4261 to enable Bluetooth® communications.
With the Z3210, you can transfer data directly to an Excel® file or pair the instrument with GENNECT Cross.



Attach to enable Bluetooth® wireless technology



Transport to the Excel® file



Transport to GENNECT Cross

Z3210
For more details

Digital Multimeters/Testers

Standard DMM that Delivers Top Safety and Reliability - General Purpose Testers with Rich Measurement Functions

DIGITAL MULTIMETER DT4252, DT4256



DT4252



DT4256

USB Option



CAT II 600 V

CAT III 1000 V



- ±0.3% DC V basic accuracy, wide 40 Hz to 1 kHz AC V frequency characteristics
- Measure up to 10A with direct input
- Dual display lets you check voltage and frequency simultaneously
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveform)
- USB communications function supports PC measurement (optional)
- Broad -25°C (-13°F) to 65°C (149°F) operating temperature range (DT4256)

Model No. (Order Code) DT4252
DT4256

(20 A direct input)
(Multi-functional model, with 10 A direct input)

Requesting DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DT4252	DT4256
DC Voltage range	600.0 mV to 1000 V, 5 ranges Basic accuracy: ±0.3% rdg ±3 digit	600.0 mV to 1000 V, 5 ranges Basic accuracy: ±0.3% rdg ±3 digit
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz Basic accuracy 40 - 500 Hz: ±0.9% rdg ±3 digit (True RMS, crest factor 3)	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz Basic accuracy 40 - 500 Hz: ±0.9% rdg ±3 digit (True RMS, crest factor 3)
AUTO AC/DCV	N/A	Yes
Resistance range	600.0 Ω to 60.0 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±3 digit	600.0 Ω to 60.0 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±3 digit
DC Current range	6.000 A / 10.00 A, 2 ranges, Basic accuracy: ±0.9% rdg ±3 digit	6.000 mA to 10.00 A, 4 ranges, Basic accuracy: ±0.9% rdg ±3 digit
AC Current range	6.000 A / 10.00 A, 2 ranges, Basic accuracy 40 - 500 Hz: ±1.4% rdg ±3 digit (True RMS, crest factor 3, 40 Hz to 1 kHz)	6.000 mA to 10.00 A, 4 ranges, Basic accuracy 40 - 500 Hz: ±1.4% rdg ±3 digit (True RMS, crest factor 3, 40 Hz to 1 kHz)
AC Current range (use with Clamp on probes)	N/A	10.00 A to 1000 A, 7 ranges, Add the Clamp on probe accuracy to basic accuracy 40 - 1 kHz: ±0.8% rdg ±3 digit (True RMS, crest factor 3)
Voltage detection (50/60 Hz)	N/A	Hi-AC40 V to 600 V, Lo-AC80 V to 600 V
Capacitance range	1.000 μF to 10.00 mF, 5 ranges, Basic accuracy: ±1.9% rdg ±5 digit	
Frequency range	99.99 Hz 0.01 ms to 99.99 kHz, 4 ranges (limited by the minimum detectable voltage and noise), Basic accuracy: ±0.1% rdg ±1 digit	
Continuity check	Continuity threshold [ON]: 25 Ω or less (Indicates buzzer sound, red LED), [OFF]: 245 Ω or more, Response time: 0.5 ms or more	
Diode test	Open terminal voltage: 0.0 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V	
Other functions	Filter function, Display value hold, Auto hold, Max/Min/Average value display, Relative display, Auto-power save, USB communication (option)	
Display	Main and Sub display: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 times/s, Temperature: 3 times/s)	
Power supply	LR03 alkaline batteries x4, Continuous use: 130 hours (backlight OFF)	
Dimensions and mass	84 mm (3.31 in)W × 174 mm (6.85 in)H × 52 mm (2.05 in)D, 390 g (13.8 oz) (including batteries and holder)	
Included accessories	Test lead L9207-10 x1, Holster x1, Instruction manual x1, LR03 alkaline battery x4	

Standard DMM that Delivers Top Safety and Reliability - Application-Specific Testers to Meet Your Needs

DIGITAL MULTIMETER DT4253, DT4255



DT4253



DT4255

USB Option



CAT II 600 V

CAT III 1000 V



- Ideal for measuring currents ranging from instrumentation signals (4 to 20 mA) to flame currents (μA) with built-in high-sensitivity current ranges (DT4253)
- Prevents short-circuit accidents with a fast-blow fuse and current-limiting resistor (DT4255)
- Prevents accidents with clamp-on sensor-based current measurement (DT4255)
- Voltage detection function (DT4255)
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad -25°C (-13°F) to 65°C (149°F) operating temperature range (DT4255)
- Dual display lets you check voltage and frequency simultaneously

*1 Your instrument can be used to measure voltages in excess of 1000 V DC if and only if both of the following conditions are satisfied. 1. The circuit under measurement is isolated from the commercial power grid. 2. The circuit under measurement is isolated from ground.

Model No. (Order Code) DT4253
DT4255

(With m A/D/C, temperature)
(With fixed measurement terminals)

Requesting DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DT4253	DT4255
DC Voltage range	600.0 mV to 1000 V 5 ranges, Basic accuracy: ±0.3% rdg ±3 digit	600.0 mV to 1000 V 5 ranges, Basic accuracy: ±0.3% rdg ±3 digit
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz Basic accuracy 40 - 500 Hz: ±0.9% rdg ±3 digit (True RMS, crest factor 3)	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz Basic accuracy 40 - 500 Hz: ±0.9% rdg ±3 digit (True RMS, crest factor 3)
AUTO AC/DCV	Yes	Yes
Resistance range	600.0 Ω to 60.0 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±3 digit	600.0 Ω to 60.0 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±3 digit
DC Current range	6.000 μA to 60.00 mA, 4 ranges, Basic accuracy: ±0.8% rdg ±3 digit	N/A
Test & Data Protection (overload display)	Yes	N/A
AC Current range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges, Add the Clamp on probe accuracy to basic accuracy 40 - 1 kHz: ±0.9% rdg ±3 digit (True RMS, crest factor 3)	
Temperature (thermocouple)	10°C - 400°C 400°C, Add the Temperature probe accuracy to basic accuracy: ±0.5% rdg ±2°C	N/A
Voltage detection	N/A	
Capacitance range	1.000 μF to 10.00 mF, 5 ranges, Basic accuracy: ±1.9% rdg ±5 digit	
Frequency range	99.99 Hz 0.01 ms to 99.99 kHz, 4 ranges (limited by the minimum detectable voltage and noise), Basic accuracy: ±0.1% rdg ±1 digit	
Continuity check	Continuity threshold [ON]: 25 Ω or less (Indicates buzzer sound, red LED), [OFF]: 245 Ω or more, Response time: 0.5 ms or more	
Diode test	Open terminal voltage: 0.0 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V	
Other functions	Filter function, Display value hold, Auto hold, Max/Min/Average value display, Relative display, Auto-power save, USB communication (option)	
Display	Main and Sub display: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 times/s)	
Power supply	LR03 alkaline batteries x4, Continuous use: 130 hours (backlight OFF)	
Dimensions and mass	84 mm (3.31 in)W × 174 mm (6.85 in)H × 52 mm (2.05 in)D, 390 g (13.8 oz) (including batteries and holder)	
Included accessories	Test lead L9207-10 x1, Holster x1, Instruction manual x1, LR03 alkaline battery x4	

*1 Your instrument can be used to measure voltages in excess of 1000 V DC if and only if both of the following conditions are satisfied. 1. The circuit under measurement is isolated from the commercial power grid. 2. The circuit under measurement is isolated from ground.

Absolute prevention of short-circuit accidents (DT4255)

A : 0.63 A / 1000 V fuses (max. 1000 V, 0.63 A)

B : Circuit current-limiting resistor



Digital Multimeters/Testers

Premier Pocket DMM with CAT IV 300V/ CAT III 600V Safety

DIGITAL MULTIMETER DT4221, DT4222



DT4221



DT4222

- Achieving a high level of safety in a compact body and lightweight design
- Resistance and diode testing functions omitted by design in pursuit of added safety (DT4221)
- Voltage detection function (DT4221)
- Resistance, Capacitance measurement and diode testing (DT4222)
- Robust design capable of withstanding a drop from a height of 1 m
- Test leads conveniently wrap around the back
- <0.5% DC V basic accuracy, wide 40 Hz to 1 kHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad -10 (14°F) to 50°C (122°F) operating temperature range
- Display backlight

Model No. (Order Code) DT4221 (V measurement only, for electrical work)
DT4222 (With OH measurement, for general use)

Reporting DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DT4221	DT4222
DC Voltage range	600.0 mV to 600.0 V, 4 ranges, Basic accuracy: <0.5% rdg ±3 digit	
AC Voltage range	6.000 V to 600.0 V, 3 ranges, Frequency characteristics: 40 Hz - 1 kHz: Basic accuracy 40 - 500 Hz: ±1.0% rdg ±1 digit (True RMS, crest factor 3)	
Resistance range	N/A	600.0 Ω to 60.0 MΩ, 6 ranges, Basic accuracy: <0.9% rdg ±3 digit
Capacitance range	N/A	1.000 pF to 10.00 nF, 5 ranges, Basic accuracy: <1.5% rdg ±3 digit
Frequency range	AC V measurement: 99.99 Hz (5 Hz or more) to 9.999 kHz, 3 ranges Basic accuracy: ±0.1% rdg ±2 digit	
Continuity check	Continuity threshold (ON): 25 Ω or less (softer sound), (OFF): 245 Ω or more Response time: 0.5 ms or more	
Diode test	N/A	Open terminal voltage: 2.5 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V
Voltage detection	80 V to 600 V AC	N/A
Other functions	Filter function, Display value hold, Relative display, Auto-power save	
Display	Main and Sub display: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 times/s)	
Power supply	LR03 alkaline batteries ×1, Continuous use: 40 hours (backlight OFF)	
Dimensions and mass	71 mm (2.83 in)W × 149 mm (5.87 in)H × 38 mm (1.50 in)D, 190 g (6.7 oz) (including batteries and belt)	
Included accessories	Test lead DT4911 ×1, Holster ×1, Instruction manual ×1, LR03 alkaline battery ×1	

Proprietary Protection Function Against Accidental Voltage Input Prevents Power Failure and Fires

DIGITAL MULTIMETER DT4223, DT4224



DT4223



DT4224

- Achieving a high level of safety in a compact body and lightweight design
- Circuit breaker false trip prevention function helps avoid accidents resulting from breakers that mistakenly trip due to incorrect input
- Resistance measurement and voltage detection function (DT4223)
- More convenient function: Resistance, Capacitance measurement and diode testing (DT4224)
- Robust design capable of withstanding a drop from a height of 1 m
- Test leads conveniently wrap around the back
- <0.5% DC V basic accuracy, wide 40 Hz to 1 MHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad -10 (14°F) to 65°C (149°F) operating temperature range
- Display backlight

Model No. (Order Code) DT4223 (With resistance measurement, for electrical work)
DT4224 (With OH measurement, for general use)

Reporting DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DT4223	DT4224
DC Voltage range	600.0 mV to 600.0 V, 4 ranges, Basic accuracy: <0.5% rdg ±3 digit	
AC Voltage range	6.000 V to 600.0 V, 3 ranges, Frequency characteristics: 40 Hz - 1 kHz: Basic accuracy 40 - 500 Hz: ±1.0% rdg ±1 digit (True RMS, crest factor 3)	
Resistance range	600.0 Ω to 60.0 MΩ, 6 ranges, Basic accuracy: <0.9% rdg ±3 digit	
Capacitance range	N/A	1.000 pF to 10.00 nF, 5 ranges, Basic accuracy: <1.5% rdg ±3 digit
Frequency range	AC V measurement: 99.99 Hz (5 Hz or more) to 9.999 kHz, 3 ranges Basic accuracy: ±0.1% rdg ±2 digit	
Continuity check	Continuity threshold (ON): 25 Ω or less (softer sound), (OFF): 245 Ω or more Response time: 0.5 ms or more	
Diode test	N/A	Open terminal voltage: 2.5 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V
Voltage detection	80 V to 600 V AC	N/A
Other functions	Circuit breaker false trip prevention function, Filter function, Display value hold, Relative display, Auto-power save	
Display	Main and Sub display: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 times/s)	
Power supply	LR03 alkaline batteries ×1, Continuous use: 35 hours (backlight OFF)	
Dimensions and mass	71 mm (2.83 in)W × 149 mm (5.87 in)H × 38 mm (1.50 in)D, 190 g (6.7 oz) (including batteries and belt)	
Included accessories	Test lead DT4911 ×1, Holster ×1, Instruction manual ×1, LR03 alkaline battery ×1	

Shared options for the DT4220 series

TEST LEAD DT4911
CAT III 1000V, CAT II 600V,
3400 d.775 lengthCONTACT PIN SET L4933
It attaches to the top of the Test Lead DT4911/W.
L4933 DT4911/L4933, 60V DC/300V ACSMALL ALLIGATOR CLIP SET L4934
Attaches to the top of the L4931/L4931/W, L4933-
DT4911/L4933, 60V DC/300V, CAT II 600VMAGNETIC STRAP
Z5020
Extra strengthMAGNETIC STRAP
Z5004CARRYING CASE
C0200

Digital Multimeters/Testers

Pencil-type DMM with LED Light

PENCIL HiTESTER 3246-60



- Test lead and main unit in a single body
- Overload protection to 600 V at resistance or continuity functions
- LED light brightly illuminates test points

Model No. (Order Code) 3246-60

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	49.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg ± 4 digit
AC Voltage range	4199 V to 600 V, 4 ranges, Basic accuracy 50 - 500 Hz: $\pm 2.3\%$ rdg ± 8 digit (average rectified)
Resistance range	49.9 Ω to 49.99 M Ω , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg ± 4 digit
Continuity buzzer	Detection level 50 $\Omega \pm 40\Omega$
Diode check	Judges the right direction only. Open terminal voltage: 3.4 V or less, Testing current: 200 μ A or less
Auto power save	Available (cancel selectable)
Display	Digital LCD, max. 4199 digits
Sampling rate	2.5 times/sec
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use: 150 hours (at DC/V function), 30 hours (with light turned on for 10 seconds and off for 20 seconds per cycle and in DC/V function)
Dimensions and mass	30 mm (1.18 in)W \times 182 mm (7.17 in)H \times 26.5 mm (1.04 in)D, 80 g (2.8 oz)
Included accessories	Instruction manual $\times 1$, Coin type lithium battery (CR2032) $\times 1$ (for trial purposes only), Sleeves (Red/Black each 1)

Compact! Palm Size Body, Less Than 1cm Thin!

CARD HiTESTER 3244-60



Rugged external case C0204 protects the DMM. Standard accessory.

- Better contact test leads with 15 mm gold-plated tip pin
- Only 9.5 mm (0.37 in) thick and 60 g (2.1 oz) in weight
- Full auto-ranging function and automatic power saving function
- Overload protection to 500 V at resistance or continuity functions

Model No. (Order Code) 3244-60

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalog for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	49.9 mV to 500 V, 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg ± 4 digit
AC Voltage range	4199 V to 500 V, 4 ranges, Basic accuracy 50 - 500 Hz: $\pm 2.3\%$ rdg ± 8 digit (average rectified)
Resistance range	49.9 Ω to 49.99 M Ω , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg ± 4 digit
Continuity buzzer	Detection level 50 $\Omega \pm 40\Omega$, Diode check: Not available
Auto power save	Available (cancel selectable)
Display	Digital LCD, max. 4199 digits
Sampling rate	2.5 times/sec
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use: 150 hours
Dimensions and mass	55 mm (2.17 in)W \times 109 mm (4.29 in)H \times 9.5 mm (0.37 in)D, 60 g (2.1 oz)
Included accessories	Instruction manual $\times 1$, Carrying case $\times 1$, Coin type lithium battery (CR2032) $\times 1$ (for trial purposes only), Sleeves (Red/Black each 1)



*When used in CAT III environments, insulation gloves are required.

Basic Analog Tester (20 kilohm/V)

HITESTER 3030-10



- Drop proof design withstands drop onto a concrete floor from a height of 1 meter
- LED check, Battery check support

Model No. (Order Code) 3030-10

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	0.3 V (16.7 k Ω /V), 3/12/30/120/300/600 V (20k Ω /V) Accuracy: $\pm 2.5\%$ F.S. Max. rated voltage: 600 V
AC Voltage range	12 V (9.5 k Ω /V) Accuracy: $\pm 4\%$ F.S. 30/120/300/600 V (9.5 k Ω /V) Accuracy: $\pm 2.5\%$ F.S. Average rectified effective value, Max. rated voltage: 600 V
DC Current range	60 μ A/30 mA/300 mA (300 mV internal voltage drop) Accuracy: $\pm 3\%$ F.S.
Resistance range	0 to 3 k Ω (center scale 10 k Ω), R \times 1, R \times 10, R \times 100, R \times 1 k Accuracy: $\pm 3\%$ of scale length
Battery check	0.9 to 1.8 V, load resistance 10 Ω , Accuracy: $\pm 6\%$ F.S.
Temperature scale	Note: The 3030-10 includes a temperature measurement scale, but the separate optional Thermocouple Probe H017-11 has been discontinued; the scales are not available for new customers.
Power supply	For resistance measurement range, R6P (AA) $\times 2$ batteries
Dimensions and mass	95 mm (3.74 in)W \times 141 mm (5.55 in)H \times 39 mm (1.54 in)D, 280 g (0.9 oz)
Included accessories	Test lead L9207-30 $\times 1$, Spare fuse $\times 1$, R6P (AA) manganese batteries $\times 2$, Instruction manual $\times 1$, Carrying case #390 $\times 1$

*The 3030-10 and the 3030-100 are included. *The L4933 and L4938 are attached with the set of L9207-30 test leads.

TEST LEAD L9207-30 CONTACT PIN SET L4933
70 mm (2.36 in) length

Attaches to the top of the Test Lead L9207-30, CAT III 1000V, CAT II 600V

SMALL ALLIGATOR CLIP SET L4934
Attaches to the top of the Test Lead L9207-30, CAT III 1000V, CAT II 600V



Insulation Testers/Megaohm Testers

Quick Response Comparator Offering Reading Stability in High-speed Digital Format

INSULATION TESTER IR4057-50, IR4059



IR4059



IR4057-50



CAT II 600 V



IR4057 only



Brazil



WEEE

Bluetooth®
When Z3210 is
installed

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- 5-range testing voltage of 50 V/100 MΩ to 1000 V/4000 MΩ
- Digital bar graph
- Stable & high-speed digital readings, 0.3 second response time for PASS/FAIL decisions
- Drop proof onto concrete from 1 m (3.28 feet)
- Bright LED, luminous LCD, test lead with bright LED lamp to illuminate near hand (Option L9788-11 or L9788-10)
- Continuity check via 200 mA testing
- Built in AC/DC voltage meter, useful for testing solar power generation systems and electric vehicles

Model No. (Ordn. Code) **IR4057-50** (Wireless Adapter Z3210 not included)
IR4057-90 (Included with the Wireless Adapter Z3210)
IR4059 (Wireless Adapter Z3210 not included)

■ Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC		
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	1000 MΩ	4000 MΩ		
Accuracy	±2% rdg ±2 digit 0.200 - 10.00	±2% rdg ±2 digit 0.200 - 25.0	±2% rdg ±2 digit 0.200 - 50.0	±2% rdg ±2 digit 0.200 - 100.0	±2% rdg ±2 digit 0.200 - 1000		
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ		
Overload protection	600 V AC (10s)			600 V AC (10s)			
DC voltage range	4.2 V (0.001 V resolution) to 600 V (1 V resolution), 4 ranges.						
AC voltage range	420 V (1 V resolution) / 600 V (1 V resolution), 2 ranges, 50/60 Hz.						
Low resistance range	For checking the continuity of ground wiring, 10 Ω (0.01 Ω resolution) to 1000 Ω (1 Ω resolution), 3 ranges, Basic accuracy: ±3% rdg ±2 digit, testing current 200 mA or more (at 6 Ω or less).						
Display	Semi-transmissive PSTN LCD with back lighting, bar-graph indicator						
Response time	Approx. 0.3 second for PASS/FAIL decision (based on in-house testing)						
Other functions	Indicate MIN measurement value after a lapse of one minute, Live circuit indicator, Automatic electric discharge, Automatic DC/A/C detection, Comparator, Drop proof, Auto power save						
Power supply	1.8V (AA) alkaline batteries × 4, Continuous use: 20 hours (based on in-house testing). Number of measurements: 1000 times (at 5 s/ON, 25 s OFF cycle, insulation measurement at lower limit resistance value to maintain nominal output voltage)						
Dimensions and mass	IR4057-50: 184x153x40, 150 mm (5.91 in) W × 177 mm (6.97 in) H × 45 mm (1.77 in) D, 640 g (1.44 lb) (including batteries, excluding test leads). IR4059: 160 mm (6.30 in) W × 94 mm (3.66 in) H × 41 mm (1.61 in) D, 536 g (1.18 lb) (including batteries and protective case, excluding test leads)						
Included accessories	Connection cable L4930 × 1, Alligator clip set L4935 × 1, Test pin set L4938 × 1, Neck strap × 1, Instruction manual × 1, LR6 (AA) alkaline batteries × 4, Test lead with remote switch (L9788-10) × 1 (included with IR4059 only), Protector Z5042 × 1 (included with IR4059 only)						

■ Data can be downloaded to tablets and smartphones using Hücki's dedicated apps available from the Google Play or App Store.

Search for "HÜCKI" and download the "GENNECT Cross" app.



"Hücki", Google Play and the Google Play logo are trademarks of Google Inc.

"Z3210" is a registered trademark of Class Technology, Inc. and/or its affiliates in the United States and certain other countries.

"iPhone", "iPad", "iPod touch", "iTunes" and "App Store" are trademarks of Apple Inc.

"Microsoft", "Windows", "Windows Phone", and "Xbox" are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

"Display unit" and "Product names" appearing in this catalog are trademarks or registered trademarks of various companies.

The "Bluetooth®" wordmark and logo are registered trademarks owned by Bluetooth SIG, Inc. and/or its trademarks.

© HÜCKI GMBH 2014

Product information about countries and regions where wireless operation is currently supported, please visit the [Hücki website](#).



Bundled Accessories

CONNECTION CABLE SET
L4930
12 m (3.94 ft) length, CAT IV
1000V, CAT III 1000VALLIGATOR CLIP SET L4935
Attaches to the top of the L4930/
L4940, CAT IV 1000V, CAT III 1000VTEST PIN SET L4938
Attaches to the top of the
L4930/L4940, CAT III 1000V

LAST options



TEST LEAD L9788-91

3-wire with Line Earth lead,
alligator clip, 1.2 m (3.94 ft) length.



BREAKER PIN L9788-91


For checking breaker terminal.
Breakable tip up to the L9788-91
is 0.99 in length, ø 2.6 mm (ø 10 mil)

TEST LEAD SET WITH REMOTE
SWITCH L9788-11

Breakable with Test Lead with Remote Switch L9788-91
Earth lead, alligator clip, 1.2 m (3.94 ft) length.

TEST LEAD WITH REMOTE SWITCH
(RED) L9788-10

Lighting LED lamp & comparator indicator
(Operate only when main and probe is
connected correctly), 1.2 m (3.94 ft) length.

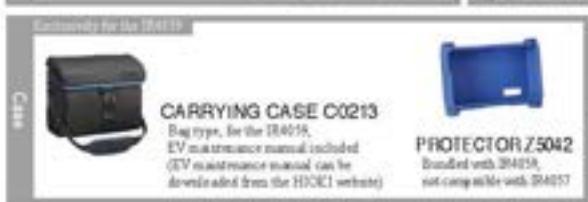TIP PIN L9788-90
Spade part for top of the
L9788/L9789-10, Tip
length 15 mm (0.59 in)BREAKER PIN L9788-92
For checking breaker terminal.
Breakable tip up to the L9788-92
is 0.99 in length, ø 2.6 mm (ø 10 mil)

Optional

CARRYING CASE C0213
Bag type, for the IR4059.
EV maintenance manual included.
(EV maintenance manual can be
downloaded from the HÜCKI website)PROTECTOR Z5042
Branded with IR4059,
not compatible with IR4057WIRELESS ADAPTER
Z3210 (Included with IR4057-90)
Supplying in the Z3210 wireless
adapter and your compatible IED/SCADA
device is IEEE 802.15.4MAGNETIC ADAPTER
9804-01
Attaches to the tip of cord,
red 1, ø 1 mm (ø 10 mil)MAGNETIC ADAPTER
9804-02
Attaches to the tip of cord,
black 1, ø 1 mm (ø 10 mil)GENNECT CROSS
SF4071, SF4072
Mobile app for iOS,
Android

Insulation Testers/Megaohm Testers

Our Most Popular Model Offering Reading Stability in Medium-speed Digital Format INSULATION TESTER IR4056



IR4056-20



IR4056-21

Comparator function
Fail alert with red LCD illuminatorTest lead L9788-10
Bright LED lamp & comparator
indicator (green lamp)

CAT II 600 V

Excluding IR4056-21

- 5-range testing voltage of 50 V/100 MΩ to 1000 V/4000 MΩ
- Stable & medium-speed digital readings, 0.8 second response time of PASS/FAIL decisions
- Drop proof onto concrete from 1 m (3.28 feet)
- Bright LED, luminous LCD, test lead with bright LED lamp to illuminate near hand (Also available in the IR4056-21)
- Continuity check via 200 mA testing
- Built-in AC/DC voltage meter, useful for testing solar power generation systems and electric vehicles

Model No. (Order Code) IR4056-20 (Economic model)
IR4056-21 (Economic model, Not CE marked)

■ Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy	±2% rdg ±2 digit	±2% rdg ±2 digit	±2% rdg ±2 digit	±2% rdg ±2 digit	±2% rdg ±2 digit
1st effective measuring range MD	0.200 - 10.00	0.200 - 25.0	0.200 - 50.0	0.200 - 200	0.200 - 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10 s)				
DC voltage range	4.2 V (0.001 V resolution) to 600 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 digit, Input resistance: 100 kΩ or higher				
AC voltage range	420 V (0.1 V resolution) / 1000 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 digit, Input resistance: 100 kΩ or higher, Average rectifier				
Low resistance range	For checking the continuity of ground wiring, 10 Ω (0.01 Ω resolution) to 1000 Ω (1 Ω resolution), 3 ranges, Basic accuracy: ±3% rdg ±2 digit, testing current 200 mA or more (at 1.2 or less)				
Display	Semi-transmissive FSTN LCD with back lighting				
Response time	Approx. 0.8 second for PASS/FAIL decision (based on in-house testing)				
Other functions	Live circuit indicator, Automatic electric discharge, Automatic DC/AC detection, Comparator, Drop-proof, Auto power save				
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (Comparator off, back-light off, 500 V range, no load)				
Dimensions and mass	Number of measurements: 1000 times (at 5 s ON, 25 s OFF cycle, insulation measurement at lower limit resistance value to maintain nominal output voltage)				
Included accessories	159 mm (6.26 in) W × 177 mm (6.97 in) H × 53 mm (2.09 in) D, 600 g (1.2 lb) (including batteries, excluding test leads)				
	[IR4056-20] Test lead L9787-1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4				
	[IR4056-21] Test lead set with remote switch L9788-11 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4				

Measure PV Insulation Resistance Safely, Accurately and Quickly

INSULATION TESTER IR4053



option

TEST LEAD SET WITH
REMOTE SWITCH L9788-11
Bundled with Remote switch
type test lead L9788-10 Earth
lead, alligator clip, 1.2 m (3.94 ft)
length

CAT II 600 V



■ Basic specifications (Accuracy guaranteed for 1 year)

PVO measurement

Rated output voltage	500 V DC	1000 V DC
Effective maximum indicated value	2000 MΩ	4000 MΩ
Measuring range/Accuracy	0.200 to 500 MΩ / ±4% rdg, 500 to 2000 MΩ / ±8% rdg	0.200 to 1000 MΩ / ±4% rdg, 1000 to 4000 MΩ / ±8% rdg
Other measuring range/Accuracy	0 to 0.199 MΩ / ±2% rdg ±6 digit	

Insulation resistance measurement

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy	±4% rdg, 0.200 to 1000	±4% rdg, 0.200 to 250	±4% rdg, 0.200 to 50.0	±4% rdg, 0.200 to 500	±4% rdg, 0.200 to 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10 s)				
DC voltage range	4.2 V (0.001 V resolution) to 1000 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 digit, (Ranges in excess of 1000 V are not guaranteed for accuracy)				
AC voltage range	420 V (0.1 V resolution) / 1000 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 digit, (Ranges in excess of 1000 V are not guaranteed for accuracy)				
Display	Semi-transmissive FSTN LCD with back lighting				
Response time	Insulation resistance range: 1 second, PVO function: 4 seconds (based on in-house test)				
Other functions	Live circuit indicator, automatic electric discharge, automatic DC/AC detection, comparator, drop-proof, auto power save				
Power supply	AA alkaline batteries (LR6) ×4, Continuous operating time: Approx. 20 hours (based on in-house test)				
Dimensions and mass	159 mm (6.26 in) W × 177 mm (6.97 in) H × 53 mm (2.09 in) D, Approx. 600 g (1.2 lb) (including batteries, excluding test lead)				
Included accessories	TEST LEAD L9787-1, Neck strap ×1, Instruction manual ×1, AA alkaline batteries (LR6) ×4				

Model No. (Order Code) IR4053-10 (Bundled with standard Test Lead L9787)

Shared options for the Insulation Tester IR4058, IR4056, and IR4053

TEST LEAD L9788-90
Brushes with low Earth lead, alligator clip, 1.2 m (3.94 ft) lengthTEST LEAD SET WITH REMOTE
SWITCH L9788-10
Bundled with Test Lead with Remote Switch L9788-10 Earth lead, alligator clip, 1.2 m (3.94 ft) lengthBREAKER PIN L9788-90
Spade parts for tip of the
L9788-10/11 tip, length 25 mm (0.98 in)MAGNETIC ADAPTER
9804-02
Adapter to the tip of coil, Made <1.91 mm (0.47 in)

Insulation Testers/Megaohm Testers

Reliable and Efficient Insulation Testing in the Field

ANALOG MΩ HITESTER IR4018



CE
CAT III 600 V



3-year
Warranty

- Single range testing voltage of 1000 V
- Test insulation resistance up to 2000 MΩ
- Built tough to withstand a 1-meter drop onto a concrete floor
- Bright LED luminous scale
- Check for live circuits and battery status
- Integrated hard case for quick and easy storage without disconnecting the leads

Model No. (Order Code) IR4018-20

■ Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	1000 V DC
Effective maximum indicated value	2000 MΩ
Accuracy ± effective measuring range	±2 % of scale length, 2 M to 1000 MΩ
Lower limit resistance	1 MΩ (measurement resistance value to maintain testing voltage)
Overload protection	600 V AC (10 sec.)
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 500 kΩ or more input resistance
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 15 hours (no load)
Dimensions and mass	159 mm (6.26 in)W × 177 mm (6.97 in)H × 53 mm (2.09 in)D, 630 g (13.5 oz), (including battery, excluding test lead)
Included accessories	Test lead L9787 ×1, LR6 (AA) alkaline batteries ×4, Instruction manual ×1, Shoulder strap ×1

Reliable and Efficient Insulation Testing in the Field

ANALOG MΩ HITESTER IR4017



CE
CAT III 600 V



3-year
Warranty

- Single range testing voltage of 500 V
- Test insulation resistance up to 1000 MΩ
- Built tough to withstand a 1-meter drop onto a concrete floor
- Bright LED luminous scale
- Check for live circuits and battery status
- Integrated hard case for quick and easy storage without disconnecting the leads

Model No. (Order Code) IR4017-20

■ Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	500 V DC
Effective maximum indicated value	1000 MΩ
Accuracy ± effective measuring range	±2 % of scale length, 1 M to 500 MΩ
Lower limit resistance	0.5 MΩ (measurement resistance value to maintain testing voltage)
Overload protection	600 V AC (10 sec.)
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 500 kΩ or more input resistance
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (no load)
Dimensions and mass	159 mm (6.26 in)W × 177 mm (6.97 in)H × 53 mm (2.09 in)D, 610 g (13.5 oz), (including battery, excluding test lead)
Included accessories	Test lead L9787 ×1, LR6 (AA) alkaline batteries ×4, Instruction manual ×1, Shoulder strap ×1

Reliable and Efficient Insulation Testing in the Field

ANALOG MΩ HITESTER IR4016



CE
CAT III 600 V



3-year
Warranty

- Single range testing voltage of 500 V
- Test insulation resistance up to 100 MΩ
- Built tough to withstand a 1-meter drop onto a concrete floor
- Bright LED luminous scale
- Check for live circuits and battery status
- Integrated hard case for quick and easy storage without disconnecting the leads

Model No. (Order Code) IR4016-20

■ Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	500 V DC
Effective maximum indicated value	100 MΩ
Accuracy ± effective measuring range	±2 % of scale length, 0.1 M to 50 MΩ
Lower limit resistance	0.5 MΩ (measurement resistance value to maintain testing voltage)
Overload protection	600 V AC (10 sec.)
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 500 kΩ or more input resistance
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (no load)
Dimensions and mass	159 mm (6.26 in)W × 177 mm (6.97 in)H × 53 mm (2.09 in)D, 610 g (13.5 oz), (including battery, excluding test lead)
Included accessories	Test lead L9787 ×1, LR6 (AA) alkaline batteries ×4, Instruction manual ×1, Shoulder strap ×1

Shared options for the Analog Megaohm HiTester series IR4018 to IR4016, 3490



Insulation Testers/Megaohm Testers

Insulation Testing in 3 Easy Steps: Flip the Cover, Select Range & Test

ANALOG MΩ HiTESTER 3490



CE

CAT II 600 V

RoHS

WEEE

- 3-range testing voltage of 250/500 V (insulation resistance testing up to 100 MΩ), and 1000 V (insulation testing up to 4000 MΩ)
- Continuity check at 3 Ω range via 200 mA testing
- Bright LED luminous scale
- Check for live circuits and battery status

Model No. (Order Code) 3490

(Bundled with standard Test Lead L9787)

■ Basic specifications (Accuracy guaranteed for 1 year)

	250 V DC	500 V DC	1000 V DC
Rated output voltage	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	100 MΩ	4000 MΩ
Accuracy 1st effective measuring range	±2 % of scale length 0.05 to 50 MΩ	±2 % of scale length 0.05 to 50 MΩ	±2 % of scale length 2 to 1000 MΩ
Lower limit resistance	0.25 MΩ	0.5 MΩ	1 MΩ
	(Measurement resistance value to maintain testing voltage)		
Overload protection	660 V AC (10 sec)		
Low resistance range	3 Ω (at 200 mA testing current), ±0.09 Ω accuracy, 30 Ω (at 20 mA testing current), ±0.9 Ω accuracy, Open-circuit voltage: 4.1 to 6.9 V		
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 100 kΩ or more input resistance		
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto-discharge		
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (at 500 V range, no load)		
Dimensions and mass	159 mm (6.2 in) W × 177 mm (6.9 in) H × 53 mm (2.1 in) D, 610 g (1.3 lb) (including battery, excluding test lead)		
Included accessories	Test lead L9787 ×1, Instruction manual ×1, Shoulder strap ×1, LR6 (AA) alkaline batteries ×4		

Maximum 5kV Test Voltage - Up to 10 TΩ of Insulation Resistance Testing

HIGH VOLTAGE INSULATION TESTER IR5050, IR5051

New



IR5050



IR5051

USB

Open

CE

CAT II 2000 V

CAT III 600 V

Bluetooth

When Z3210 is installed

- Measure insulation of high-voltage equipment (such as transformers, cables, and motors)
- Wide testing voltage range, up to 5000 V from 250 V DC
- Wide measurement insulation range, up to 10 TΩ
- Automatically calculated and displayed insulation diagnostics (PL, DAR, and DD)
- Data memory functions increase your work efficiency by eliminating human errors from manual reporting
- Selectable interface compatibility, offers both wireless and USB connectivity options
- Compact and lightweight, equipped with an IP65-rated carrying case
- Measure solar PV system insulation resistance safely and accurately while generating (IR5051 only)

Model No. (Order Code) IR5050

IR5051 (For solar PV system)

IR5051-90 (For solar PV system, bundled with Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

	Insulation resistance, leakage current, voltage, capacitance, PV insulation resistance (IR5051 only)	PV insulation resistance measurement (IR5051 only)	PV insulation resistance measurement (IR5050 only)
Measurement parameters	Insulation resistance, leakage current, voltage, capacitance, PV insulation resistance (IR5051 only)		
Max. rated voltage	Max. rated voltage to terminals: 1000 V AC, 2000 V DC Max. rated voltage to ground: 1000 V (CAT IV), 2000 V (CAT III)		
Dustproof/water-proof	IP40 (with protector attached, excluding terminal) IP65 (CARRYING CASE C0212)		
Standards	EN61010 (safety), EN61326 (EMC), IEC 61557-1, IEC 61557-2 (Insulation resistance tester)		
Insulation resistance measurement			
Test voltage preset	250 V 500 V 1000 V 2500 V 5000 V		
Guaranteed accuracy range	0.00 MΩ to 2.00 GΩ ±0.00 MΩ to 100 GΩ 0.00 MΩ to 10.0 TΩ ±0.00 MΩ to 250 GΩ ±0.00 MΩ to 500 GΩ ±5% rdg ±5 digit ±5% rdg ±5 digit ±5% rdg ±5 digit ±5% rdg ±5 digit ±5% rdg ±5 digit 2.01 GΩ to 200 GΩ 10.1 GΩ to 100 TΩ 25.1 GΩ to 100 TΩ 50.1 GΩ to 100 TΩ 100 GΩ to 100 TΩ ±20% rdg ±20% rdg ±20% rdg ±20% rdg ±20% rdg		
Rated current	1 mA to 1.2 mA (short-circuit current: 2 mA or less)		
PV insulation resistance measurement (IR5051 only)			
Test voltage preset	500 V 1000 V 1500 V		
Guaranteed accuracy range	0.00 MΩ to 5.00 GΩ 0.00 MΩ to 10.0 GΩ 0.00 MΩ to 20.0 GΩ ±5% rdg ±5 digit ±5% rdg ±5 digit ±5% rdg ±5 digit 5.01 GΩ to 100 GΩ 10.1 GΩ to 100 GΩ 20.1 GΩ to 100 GΩ ±20% rdg ±20% rdg ±20% rdg		
Rated current	[Test voltage]/[20 MΩ], (short-circuit current: 2 mA or less)		
Leakage current measurement	10 nA to 1 mA, 6 ranges Accuracy: ±2% rdg ±2 digit (guaranteed accuracy range: 1.00 nA to 3 mA) ¹		
Voltage measurement	30 V to 1,000 V AC (45 Hz to 65 Hz), ±10 V to ±2,000 V DC Accuracy: ±3% rdg ±3 digit, Input resistance: 500 kΩ or more (DC, 45 Hz to 65 Hz)		
Capacitance measurement	100 nF, 1000 nF, 10 μF (G range) Accuracy: ±10% rdg ±5 digit (guaranteed accuracy range: 10.0 nF to 25.0 μF) ¹		
Other functions	Insulation diagnosis (PL, DAR, DD, SV, Ramp, Timer ²), battery charge indicator, live circuit indicator, automatic power save, automatic discharge, backlight, buzzer, manual recording, logging recording, temperature and humidity input, elapsed time display, clock, filter, hardware filter, data-hold, system reset, USB communication (only when DT4900-01 is installed), wireless communication (only when Z3210 is installed), comparator, resistance gauge display, switching of insulation diagnosis function, breakdown cut-off, negative voltage notification (IR5051 only)		
Display	Digital LCD, max. 999 digit with backlight, Bar graph display		
Power supply	• LR6 (AA) alkaline battery ×8 • HR6 (AA) nickel-metal hydride (NiMH) rechargeable battery ×8		
Dimensions and mass	195 mm (7.6 in) W × 250 mm (10 in) H × 89 mm (3.5 in) D, 1.7 kg (3.77 lb) (excluding batteries)		
Included accessories	Test lead L9850-01 ×1, Test lead L9850-02 ×1, Test lead L9850-03 ×1, Alligator clip L9851-01 ×1, Alligator clip L9851-02 ×1, Alligator clip L9851-03 ×1, Carrying Case C0212 ×1, LR6 Alkaline battery ×8, Instruction manual ×1, Operating precautions ×1, Wireless adapter Z3210 (IR5051-90 only)		

¹ refer to complete catalog for other ranges

² only for the PV insulation resistance function

TEST LEAD L9850-01 Red-L, 3 m (9.84 ft) length L9850-02 Black-L, 1 m (3.28 ft) length, shielded cable L9850-03 Blue-L, 1 m (3.28 ft) length L9850-11 Red-L, 10 m (32.81 ft) length L9850-12 Black-L, 10 m (32.81 ft) length, shielded cable L9850-13 Blue-L, 10 m (32.81 ft) length	
ALLIGATOR CLIP L9851-01 Red-L, for L9850 L9851-02 Black-L, for L9850 L9851-03 Blue-L, for L9850	
TEST PIN SET L9852 Red and Black, for L9850	

Case CARRYING CASE C0212 IP65	
COMMUNICATION PACKAGE (USB) DT4900-01 Computer/Windows 10	
WIRELESS ADAPTER Z3210 (Included with IR5051-90) Simply plug in the Z3210 wireless adapter and connect to Windows 10	

Clamp Meters

Innovative Current Sensor Design, Easily Get Into Tight Spaces

AC/DC CLAMP METER CM4375-50



CAT III 600 V
CAT II 1000 V

When using P2000:
CAT III 1000 V
CAT II 2000 V



True RMS



When Z3210 is installed

- Easily get into tight spaces between cables thanks to thin sensor structure
- Automatic AC/DC function helps boost work efficiency. Measure up to 1000 A
- Measure DC voltages of up to 2000 V¹⁾ for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file.¹⁾
- Harmonic analysis from 1st to 30th order with GENNECT Cross¹⁾

¹⁾ When using the optional DC High Voltage Probe P2000. The clamp meter itself is capable of measuring up to 1000 V DC.

²⁾ Wireless Adapter Z3210 is necessary

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	1000 A, (Max. display 999.9 A), Basic accuracy: ±1.3% rdg. ±0.3 A (at 30.1 A - 999.9 A)
AC Current range	1000 A (Max. display 999.9 A, 10 Hz to 1 kHz, True RMS), Basic accuracy 45-60 Hz: ±1.8% rdg. ±0.3 A (at 30.1 A - 999.9 A)
Crest factor	1000 A range: 1.5
DC+AC Current range	1000 A (DC, 10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-60 Hz: ±1.2% rdg. ±1.3 A (at 30.1 A - 999.9 A)
DC Power range	0.0001 kVA to 1000 kVA (When using P2000, 0.01 kVA to 2000 kVA) (Automatically switched based on voltage range), Basic accuracy: ±2.0% rdg. ±20 digit.
DC Voltage range	600.0 mV to 1000 V (When using P2000, 600.0 V to 2000 V)
AC Voltage range	6.000 V to 3000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 60 Hz: ±0.9% rdg. ±0.03 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45-60 Hz: ±1.0% rdg. ±0.03 V (at 6 V)
Resistance range	600.0 Ω to 6.000 MΩ, 5 ranges, Basic accuracy: ±0.7% rdg. ±0.5 Ω (at 600 Ω)
Capacitance range	1.000 μF to 1000 μF, 4 ranges, Basic accuracy: ±1.0% rdg. ±0.005 μF (at 1 μF)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: ±0.1% rdg. ±0.03 Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0 °C, add temperature probe accuracy to basic accuracy of ±0.5% rdg. ±3.0 °C
Other functions	Continuity check, Diode check, Automatic AC/DC detection, DC current and DC voltage polarity detection function, MAX/MIN/Avg/Peak MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Backlight, Auto power save, Buzzer sound, Zero-adjustment
Output port, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closed) IP54 (While in storage)
Power supply	LR03 Alkaline battery ×2 Continuous use: approx. 40 hr (without Z3210 installed), approx. 20 hr (with Z3210 installed and using wireless communication) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	ø34 mm (1.34 in)
Smallest dimension of jaw cross-section	9.5 mm (0.37 in) (Range value of 44 mm (1.73 in) from the tip of the jaw)
Dimensions and mass	155 mm (2.56 in) W × 240 mm (9.53 in) H × 35 mm (1.38 in) D mm, 350 g (12.3 oz)
Included accessories	Test Lead L9300, Carrying Case C9203, LR03 Alkaline battery ×2, Instruction Manual ×2, Operating Instructions ×1

Model No (Order Color): CM4375-50 (Wireless Adapter Z3210 not included)

CM4375-60 (Bundled with the Wireless Adapter Z3210)

CM4375-61 (Bundled with the DC High Voltage Probe P2000)

CM4375-62 (Bundled with DC HIGH VOLTAGE PROBE P2000 and Wireless Adapter Z3210)

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

True RMS 2000 A AC/DC Clamp Meter for the Toughest Situations With DMM Functions that Deliver Top Safety

AC/DC CLAMP METER CM4373-50



CAT III 600 V
CAT II 1000 V

When using P2000:
CAT III 1000 V
CAT II 2000 V



True RMS



When Z3210 is installed

- Automatic AC/DC function helps boost work efficiency
- Measure DC voltages of up to 2000 V¹⁾ for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file.¹⁾
- Harmonic analysis from 1st to 30th order with GENNECT Cross¹⁾

¹⁾ When using the optional DC High Voltage Probe P2000. The clamp meter itself is capable of measuring up to 1000 V DC.

²⁾ Wireless Adapter Z3210 is necessary

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	600.0 A/2000 A, Basic accuracy: ±1.3% rdg. ±0.3 A (600 A range)
AC Current range	600.0 A/2000 A (10 Hz to 1 kHz, True RMS), Basic accuracy 45-60 Hz: ±1.2% rdg. ±0.3 A (at 600 A)
Crest factor	600.0 A range: 3 or less, 2000 A range: 2.84 or less
DC+AC Current range	600.0 A/2000 A (10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-60 Hz: ±1.0% rdg. ±1.3 A (at 600 A)
DC Voltage range	600.0 mV to 1000 V (When using P2000, 600.0 V to 2000 V)
AC Voltage range	6.000 V to 3000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 60 Hz: ±0.9% rdg. ±0.03 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45-60 Hz: ±1.0% rdg. ±0.03 V (at 6 V)
Resistance range	600.0 Ω to 6.000 MΩ, 5 ranges, Basic accuracy: ±0.7% rdg. ±0.5 Ω (at 600 Ω)
Capacitance range	1.000 μF to 1000 μF, 4 ranges, Basic accuracy: ±1.0% rdg. ±0.005 μF (at 1 μF)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: ±0.1% rdg. ±0.03 Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0 °C, add temperature probe accuracy to basic accuracy of ±0.5% rdg. ±3.0 °C
Voltage detection	Hi: 40 V to 600 V AC, Lo: 80 V to 600 V AC, 50/60 Hz
Other functions	DC power, Continuity check, Diode check, Automatic AC/DC detection, Peak/flat judgement function of DC A and DC V, Max/Min/Avg/Peak MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Back light, Auto-power save, Buzzer sound, Zero-adjustment, etc.
Output port, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closed) IP54 (While in storage)
Power supply	LR03 Alkaline battery ×2 Continuous use: 40 hr (without Z3210 installed), 24 hr (with Z3210 installed and using wireless communication) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	ø35 mm (1.37 in), Jaw dimension: 92 mm (3.62 in) W × 18 mm (0.71 in) D
Dimensions and mass	155 mm (2.56 in) W × 250 mm (9.84 in) H × 35 mm (1.38 in) D mm, 350 g (12.3 oz)
Included accessories	Test Lead L9300, Carrying Case C9203, LR03 Alkaline battery ×2, Instruction Manual ×2, Operating Instructions ×1

Model No (Order Color): CM4373-50 (Wireless Adapter Z3210 not included)

CM4373-60 (Bundled with the Wireless Adapter Z3210)

CM4373-61 (Bundled with the DC High Voltage Probe P2000)

CM4373-62 (Bundled with DC HIGH VOLTAGE PROBE P2000 and Wireless Adapter Z3210)

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

Clamp Meters

True RMS 600 A AC/DC Clamp Meter for the Toughest Situations With DMM Functions that Deliver Top Safety
AC/DC CLAMP METER CM4371-50



When Z3210 is installed
GENNECT Cross
SF4071, SF4072
Mobile app for iOS,
Android.

When Z3210 is installed
True RMS



CAT III 600 V
CAT II 1000 V

When using P2000:
CAT III 1000 V
CAT II 2000 V



Bluetooth®
When Z3210 is installed

- Automatic AC/DC function helps boost work efficiency
- Measure DC voltages of up to 2000 V ^(*) for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file ^(*)
- Harmonic analysis from 1st to 30th order with GENNECT Cross ^(*)

^(*) When using the optional DC High Voltage Probe P2000. The clamp meter itself is capable of measuring up to 1000 V DC.

^(**) Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4371-50** (Without Wireless Adapter Z3210 not included)
CM4371-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	20.00 A/600.0 A, Basic accuracy: ±1.3% rdg ±0.08 A (20 A range)
AC Current range	20.00 A/600.0 A (10 Hz to 1 kHz, True RMS), Basic accuracy: ±1.3% rdg ±0.08 A (at 20 A)
Crest factor	20.00 A range: 7.5, 600.0 A range: 3 or less
DC+AC Current range	20.00 A/600.0 A (10 Hz to 1 kHz, True RMS), Basic accuracy DC: 45–66 Hz: ±1.3% rdg ±0.13 A (at 20 A)
DC Voltage range	600.0 mV to 1000 V (When using P2000: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45–66 Hz: ±0.9% rdg ±0.003 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC: 45–66 Hz: ±1.0% rdg ±0.013 V (at 6 V)
Resistance range	500.0 Ω to 6.000 MΩ, 5 ranges, Basic accuracy: ±0.7% rdg ±0.5 Ω (at 600 Ω)
Capacitance range	1.000 pF to 1000 pF, 4 ranges, Basic accuracy: ±1.9% rdg ±0.005 pF (at 1 pF)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: ±0.7% rdg ±0.002 Hz (at 999.9 Hz)
Temperature (K)	40.0 to 400.0 °C, add temperature probe accuracy to basic accuracy of ±0.5% rdg ±0.1 °C
Voltage detection	DC: 40 V to 600 V AC, LC: 80 V to 600 V AC, 50/60 Hz
Other functions	DC power, Continuity check, Diode check, Automatic AC/DC detection, Pass/fail judgement function of DC A and DC V, Max/Min/Average/FMAX, MAX/FMIN, MIN/MAX value display, Low-pass Filter function, Display value hold, Auto hold, Back light, Auto-power save, Beeper sound, Zero-adjustment
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closed): IP54 (While in storage)
Power supply	1.5V Alkaline battery ×2 Continuous use: 40 hr (without Z3210 installed), 20 hr. (with Z3210 installed and using wireless communications) Other conditions: 10 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	Φ33 mm (1.30 in), Jaw dimension: 69 mm (2.72 in) W×14 mm (0.55 in) D
Dimensions and mass	65 mm (2.56 in) W×255 mm (9.61 in) H×25 mm (0.98 in) D mm, 340 g (12.0 oz)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery ×2, Instruction Manual×1, Operating Precautions×1

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

TEST LEAD L9207-10	TEST LEAD L9300	CONTACT PIN SET L4933	SMALL ALLIGATOR CLIP SET L4934	DC HIGH VOLTAGE PROBE P2000	CONNECTION CABLE SET L4940	THERMOCOUPLE(K)	CARRYING CASE C0203
Attaches to the tip of the Test Lead L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the Test Lead L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the Test Lead L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the Test Lead L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the Test Lead L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Bundled with P2000	DT4910	Carrying Case C0203
100 cm (3.94 ft) length	90 cm (3.44 in) integrated cap and protective finger guard				45 mm (1.77 in) length	K type, top exposed: 0.5 mm (0.02 in) dia, diameter: 90 cm (3.58 ft) length, -40 to 260 °C (-40 to 500 °F)	
Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50	Options for the CM4141-50, CM4371-50, CM4373-50 and CM4375-50
CONNECTION CABLE SET L4940	EXTENSION CABLE SET L4931	TEST PIN SET L4932	SMALL ALLIGATOR CLIP SET L4934	ALIQUATOR CLIP SET L4935	BUS BAR CLIP SET L4936	TEST PIN SET L4939	GRABBER CLIP L9243
12 m (39.4 ft) length, CAT III 600 V, CAT III 1000 V, 13 m (42.7 ft) length	Extends the length of the L9207-10, L9300, DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC
12 m (39.4 ft) length, CAT III 600 V, CAT III 1000 V, 13 m (42.7 ft) length	Extends the length of the L9207-10, L9300, DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC	Attaches to the tip of the L9207-10, L9300/DT9000, DT9001, DT9002, DT9003, DT9004, 60V DC/30V AC

Compact & Easy, One-Touch Maintenance on All Types of AC/DC Equipment

CLAMP ON AC/DC HITESTER 3288

■ Basic specifications (Accuracy guaranteed for 1 year)

3288	3288-20
DC Current range	100.0/1000 A, Basic accuracy: ±1.5% rdg ±5 digit
AC Current range	300.0/3000 A, (10 Hz to 500 Hz, Average rectified), Basic accuracy: ±1.5% rdg ±5 digit
DC Voltage range	489.9 mV to 600.0 V, 5 ranges, Basic accuracy: ±1.3% rdg ±4 digit
AC Voltage range	4.196 V to 600.0 V, 4 ranges, Basic accuracy: ±1.3% rdg ±8 digit (30 to 500 Hz, Average rectified)
Resistance range	489.9 Ω to 41.99 MΩ, 6 ranges, Basic accuracy: ±2.2% rdg ±4 digit
Crest factor	N/A
Other functions	Continuity (50 Ω ±40 Ω) when button pressed, Data hold, Auto power save, Auto zoom (DCA)
Display	LCD, max: 4999 digit, Display refresh rate: 2.5 times/s
Power supply	Coin type lithium battery (CR2032) ×1, Continuous use 60 hours
Core jaw dia.	Φ 35 mm (1.38 in)
Dimensions and mass	57 mm (2.24 in)/W × 180 mm (7.09 in)/H × 16 mm (0.63 in)/D, 150 g (5.3 oz)
Included accessories	Coin type lithium battery (CR2032) ×1, Carrying case 9398 ×1, Test lead L9208 ×1, Instruction manual ×1

Accessories	Accessories
CARRYING CASE 9398	TEST LEAD L9208 70 mm (2.76 in) length
Option	TEST LEADS HOLDER 8309 Screws one end of each test lead to the rear of the meter

- Model 3288-20: True RMS
- Use the 3288 for high current measurements such as UPS emergency batteries and train motors
- Voltage, resistance, and continuity check functions

Model No. (Order Code) **3288** (Average rectified)
3288-20 (True RMS)

Clamp Meters

Compact & Easy, One-Touch Maintenance on All Types of AC/DC Equipment

CLAMP ON AC/DC HiTESTER 3287



- Accurately measure even small currents with 10 A range
- Voltage, resistance, and continuity check functions

Model No. (Order Code) 3287

(True RMS)

■ Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	10.00/ 100.0 A, Basic accuracy: $\pm 1.5\%$ rdg ± 5 digit
AC Current range	10.00/ 100.0 A (10 Hz to 1 kHz, True RMS)
DC Voltage range	4.199 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg ± 4 digit
AC Voltage range	4.199 V to 600 V, 4 ranges (30 to 500 Hz, True RMS)
Resistance range	419.9 Ω to 41.99 M Ω , 6 ranges, Basic accuracy: $\pm 2.3\%$ rdg ± 4 digit
Crest factor	2.5 or less (150 A, 1000 V max.)
Other functions	Continuity (50 Ω to 100 Ω) or less/buzzer sounds, Data hold, Auto power save, Auto range (DC/A)
Display	LCD, max. 4999 deg., Display refresh rate: 2.5 times/s
Power supply	Coin type lithium battery (CR2032) x1, Continuous use 25 hours
Core jaw dia.	Ø 35 mm (1.38 in)
Dimensions and mass	57 mm (2.24 in)W x 180 mm (7.09 in)H x 16 mm (0.63 in)D, 170 g (6.0 oz)
Included accessories	Coin type lithium battery (CR2032) x1, Carrying case 9308 x1, Test lead L9208 x1, Instruction manual x1

Accessories



Options



Clamp Meters

True RMS 2000 A AC Clamp Meter Innovative Current Sensor Design - Easily Get Into Tight Spaces

AC CLAMP METER CM4141-50



CAT III 600 V
CAT II 1000 V
When using P2000
CAT III 1000 V
CAT II 2000 V



True RMS



When Z3210
is installed

- Easily get into tight spaces between cables thanks to thin sensor with a minimum cross-section span of 11 mm
- Measure up to 2000 A AC
- Measure DC voltages of up to 2000 V (1) for open voltage inspections of solar panels
- AC A, AC and DC V, DC-AC V, resistance, frequency, temperature, and more
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file (2)
- Harmonic analysis from 1st to 30th order with GENNECT Cross (3)

(1) When using the optional DC High Voltage Probe P2000. The clamp meter itself is capable of measuring up to 2000 V DC.

(2) Wireless Adapter Z3210 is necessary.

Model No. (Order Code) CM4141-50 (Without Adapter Z3210 not included)

CM4141-90 (Included with the Wireless Adapter Z3210)

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

■ Basic specifications (Accuracy guaranteed for 1 year)

AC Current range	50.00 A to 2000 A, 3 ranges (45-66 Hz, True RMS). Basic accuracy 45-66 Hz: ±1.5% rdg. with 6 A (60 A range)
Crest factor	For the 60.00 A range: 1.5 (greater than 50.00 A and less than or equal to 60.00 A) to 2000 A range: 1.5 (2000 A or less)
DC Voltage range	600.0 mV to 1000 V (When using P2000: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: ±0.9% rdg. 0.000 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC: 45-66 Hz: ±1.0% rdg. 40.00 V (at 6 V)
Resistance range	600.0 Ω to 6.000 MΩ, 5 ranges, Basic accuracy: ±0.7% rdg. 40.5 Ω (at 600 Ω)
Capacitance range	1.000 μF to 1000 μF, 4 ranges, Basic accuracy: ±1.9% rdg. ±0.05 μF (at 1 μF)
Frequency range	Voltage: 9.999 Hz to 999.9 Hz 2 ranges, Current: 99.99 Hz to 999.9 Hz 2 ranges, Basic accuracy: ±0.1% rdg. ±0.01 Hz (at 99.99 Hz)
Temperature (K)	-40.0 to 400.0 °C, Basic accuracy: ±0.5% rdg. ±0.3 °C + temperature probe accuracy
Other functions	Continuity check, Diode check, Automatic AC/DC detection (Voltage check only), Max/Min/AVG/Peak waveform, MAX/DIV value display, Low-pass filter function, Display value hold, Backlight, Auto power save, Buzzer sound, Zero-adjustment, and other functions
Dustproof, waterproof	IP20 (current measurement of voltage or hazardous line conductors under completely dry condition. Do not use when wet) IP50 (when measuring resistance, or current of an insulated conductor (completely dry), and in storage)
Power supply	1x103 Alkaline battery ×2 Continuous use: approx. 48 hr (without Z3210 installed), approx. 24 hr (with Z3210 installed and using wireless communication) Other conditions: 500 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	Φ55 mm (2.17 in), Jaw dimension: 82 mm (3.20 in) W × 21 mm (0.83 in) D (D dimension is a range value of 44 mm (1.73 in) from the tip of the jaw)
Smallest dimension of jaw cross-section	11 mm (0.43 in) (Range value of 44 mm (1.73 in) from the tip of the jaw)
Dimensions and mass	65 mm (2.56 in) W × 247 mm (9.72 in) H × 25 mm (1.38 in) D, 300 g (10.6 oz)
Included accessories	Test Lead L9300 ×1, Carrying Case C0209 ×1, 1x103 Alkaline battery ×2, Instruction Manual ×2, Operating Instructions ×1

Rugged & Compact, Quickly clamp wires in even more confined spaces!

AC CLAMP METER 3280-10F, CM3289



CAT III 1000 V (Current)
CAT II 600 V (Current)
CAT III 300 V (Voltage)



3280-10F
CM3289

- The CM3289 is the successor to the popular 3280-20F with a redesigned thinner sensor to help you get into the tightest spaces.
- New redesigned sensor for even easier clamping (CM3289)
- Expanded -25 °C to 65 °C operating temperature range
- Model CM3289: Measure even harmonic waveform components using the True RMS method
- Model 3280-10F: Measure the fundamental waveform component using the average rectified method
- Connect the CT6280 flexible sensor to measure up to 4199 A in thick or paired wires

Model No. (Order Code) 3280-10F (Average rectified)
3280-70F (3280-10F, CT6280-bundled model)
CM3289 (True RMS)

Note: The 3280-70F includes both the meter and an AC Flexible Current Sensor.
1: AC CLAMP METER 3280-10F×1
2: AC FLEXIBLE CURRENT SENSOR CT6280×1, 3: CARRYING CASE C0209×1

■ Basic specifications (Accuracy guaranteed for 1 year)

	3280-10F	CM3289
AC Current range	42.00 to 1000 A, 3 ranges (50 to 66 Hz, Average rectified). Basic accuracy: ±1.5% rdg. ±3 digit	42.00 to 1000 A, 3 ranges (40 Hz to 1 kHz, True RMS). Basic accuracy: ±1.5% rdg. ±3 digit
DC Voltage range	420.0 mV to 600 V, 5 ranges, Basic accuracy: ±1.0% rdg. ±3 digit	420.0 V to 600 V, 4 ranges (45 to 500 Hz, True RMS). Basic accuracy: ±1.8% rdg. ±3 digit
AC Voltage range	4.200 V to 600 V, 4 ranges (45 to 500 Hz, Average rectified). Basic accuracy: ±1.8% rdg. ±3 digit	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS). Basic accuracy: ±1.8% rdg. ±3 digit
Crest factor	N/A	2.5 or less at 2500 counts (Lesser dimension 1.5 or less at 4200 counts)
Resistance range	420.0 Ω to 42.00 MΩ, 6 ranges, Basic accuracy: ±2.0% rdg. ±4 digit	420.0 Ω to 42.00 MΩ, 6 ranges, Basic accuracy: ±2.0% rdg. ±4 digit
Other functions	Continuity: Buzzer sounds at 50 Ω ±40 Ω or less, Data hold, Auto power save, Drop-proof from height of 1 meter	Continuity: Buzzer sounds at 50 Ω ±40 Ω or less, Data hold, Auto power save, Drop-proof from height of 1 meter
Display	LCD, max. 4199 digit, Display refresh rate: 400 ms	LCD, max. 4199 digit, Display refresh rate: 400 ms
Power supply	Coin type lithium battery (CR2032) ×1, Continuous use 120 hours	Coin type lithium battery (CR2032) ×1, Continuous use 70 hours
Core jaw dia.	Φ33 mm (1.30 in)	Φ33 mm (1.30 in)
Dimensions and mass	57 mm (2.24 in) W × 175 mm (6.89 in) H × 16 mm (0.63 in) D, 100 g (3.5 oz)	57 mm (2.24 in) W × 181 mm (7.13 in) H × 16 mm (0.63 in) D, 100 g (3.5 oz)
Included accessories	CARRYING CASE C0209 ×1, TEST LEAD L9208 ×1, Coin type lithium battery (CR2032) ×1, Instruction manual ×1	CARRYING CASE C0209 ×1, TEST LEAD L9208 ×1, Coin type lithium battery (CR2032) ×1, Instruction manual ×1

■ CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Core jaw dia.	Φ130 mm (5.12 in)
Cable cross-section diameter:	5 mm (0.20 in), tip cap diameter: 7 mm (0.28 in)
AC Current	419.9 A/4199 A, 2 ranges (±3.0% rdg. ±5 digit)
Cable length	800 mm (31.5 in)



TEST LEAD L9208
19 cm (7.5 in)/mag



CARRYING CASE
9398



AC FLEXIBLE CURRENT
SENSOR CT6280
Includes C0209 and test lead



CARRYING CASE
C0205
For CT6280, L9208, and
test lead included



TEST LEADS HOLDER
9209
Screws one end of each test lead
to the rear of the meter



CONTACT PIN SET
L4933
Attached to the tip of the Test
Lead L9208-40V DC 300V AC



SMALL ALLIGATOR CLIP
SET L4934
Attached to the tip of the L9208,
CAT31 100V, CAT31 600V

Clamp Meters

Large Jaw Lets You Clamp with Ease, Measure Thick Cables Right at the Terminal

AC CLAMP METER CM3281, CM3291



CE
CAT III 300 V
CAT II 600 V



3-year
Warranty

CM3281
True RMS
CM3291

- AC only, measure up to 2000 AAC
- -25 °C to 65 °C operating temperature range
- Also measure resistance, continuity, AC and DC voltage

Model No. (Order Code) CM3281 (Average rectified)
CM3291 (True RMS)

■ Basic specifications (Accuracy guaranteed for 1 year)

	CM3281	CM3291
AC Current range	40.0 to 2000 A, 3 ranges (50 Hz to 60 Hz, Average rectified, Basic accuracy 50-60 Hz ±1.5% rdg ±5 digit)	40.0 to 2000 A, 3 ranges (40 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz ±1.5% rdg ±5 digit
DC Voltage range	400.0 mV to 600 V, 5 ranges, Basic accuracy ±1.5% rdg ±5 digit (at 4.2 V range)	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS), Basic accuracy 45-66 Hz ±1.5% rdg ±5 digit (at 4.2 V range)
AC Voltage range	4.200 V to 600 V, 4 ranges (45 to 500 Hz, Average rectified), Basic accuracy 45-66 Hz ±1.5% rdg ±5 digit (at 4.2 V range)	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS), Basic accuracy 45-66 Hz ±1.5% rdg ±5 digit (at 4.2 V range)
Crest factor	N/A	For 1500 crest values, 25 Relation band 1 to 15 or less at 4000 crest limit, 1.5 relation for 2000 AAC range
Resistance range	420.0 Ω to 42.0 MΩ, 6 ranges, Basic accuracy ±2.0% rdg ±4 digit (at 42.0 MΩ range)	420.0 Ω to 42.0 MΩ, 6 ranges, Basic accuracy ±2.0% rdg ±4 digit (at 42.0 MΩ range)
Other functions	Continuity check, Buzzer sound at 50 Ω ±40 Ω or less, Data hold, Auto power save, Drop-proof from height of 1 meter	Continuity check, Buzzer sound at 50 Ω ±40 Ω or less, Data hold, Auto power save, Drop-proof from height of 1 meter
Power supply	Coin type lithium battery (CR2032) • Continuous use 120 hours	Coin type lithium battery (CR2032) • Continuous use 70 hours
Core jaw diameter	Φ 46 mm (1.81 in)	Φ 130 mm (5.12 in) (Cable cross-section diameter: 5 mm (0.20 in); tip cap diameter: 7 mm (0.28 in))
Dimensions and mass	57 mm (2.24 in) W × 198 mm (7.80 in) H × 16 mm (0.63 in) D, 103 g (3.6 oz)	57 mm (2.24 in) W × 198 mm (7.80 in) H × 16 mm (0.63 in) D, 103 g (3.6 oz)
Included accessories	Carrying case x1, TEST LEAD L9208 x1, Coin type lithium battery CR2032 (for trial purposes only) x1, Instruction manual x1, Download guide x1, Operating precautions x1	Carrying case x1, TEST LEAD L9208 x1, Coin type lithium battery CR2032 (for trial purposes only) x1, Instruction manual x1, Download guide x1, Operating precautions x1

■ CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Core jaw dia	Φ 130 mm (5.12 in) (Cable cross-section diameter: 5 mm (0.20 in); tip cap diameter: 7 mm (0.28 in))
AC Current	40.0 A / 400 A, 2 ranges (±3.0% rdg ±5 digit)
Cable length	800 mm (31.5 in)

Shared options for the CM3281, CM3291

Options	TEST LEAD L9208 Flexible, 70 mm (2.76 in) length	Carrying case Hard type, 223 mm (8.74 in)W × 115 mm (4.53 in)H × 46mm (1.81 in)D	AC FLEXIBLE CURRENT SENSOR CT6280 Includes carrying case C0205	CONTACT PIN SET L4933 Attaches to the tip of the Test Lead L9208, CAT III 600V, CAT II 1000V AC	SMALL ALLIGATOR CLIP SET L4934 Attaches to the tip of the CT6280, CAT III 600V, CAT II 1000V
----------------	--	--	--	---	--

For large diameter and large current measurement in combination with AC clamp meter

AC FLEXIBLE CURRENT SENSOR CT6280



CE
CAT III 300 V
CAT II 600 V



- Large-diameter loop is ideal for measuring large wires and pairs of wires.
- In small spaces
- Freely bendable

Model No. (Order Code) CT6280 (for the CM3281/80, 3200-10F and similar products)

■ CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Maximum input current	4200 A AC, continuous (50 Hz to 60 Hz)
Core jaw dia	Φ 130 mm (5.12 in) (Cross-section diameter of sensor cable: Φ 5 mm (0.20 in); Sensor tip cap diameter: Φ 7 mm (0.28 in))
Dimensions and mass	42 mm (1.65 in) W × 65 mm (2.56 in) H × 18 mm (0.71 in) D (excluding the flexible loop and output cable), 71 g (2.5 oz)
Cable length	800 mm (31.5 in)
Included accessory	Carrying case C0205 x1

Note: CT6280 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.



CARRYING CASE
C0205
Softcase

Essential equipment for professional electricians (AC FLEXIBLE CURRENT SENSOR CT6280/option)

Thin and strong clamp meter

AC FLEXIBLE CURRENT SENSOR
Φ 130 mm (5.12")
4200 A AC

Use with an AC Clamp Meter to measure large wires and currents.

Large current measurement
In small spaces



Note: CT6280 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.



Freely bendable



CARRYING CASE
C0205

Clamp Meters/Leak Current

Leakage Current Meter with Remarkable Ease of Use. Double Your Work Speed with Innovative Jaw Design.

AC LEAKAGE CLAMP METER CM4001



Slim jaws,
Core jaw diameter Ø24 mm



CAT III 300 V



When Z3210 is
installed



When Z3210 is
installed




Germany iF Design Award

- Slim jaws let you work with ease
- Measure everything from leakage to load
- Identify intermittent GFCI and RCD trips to prevent unplanned equipment downtime by testing for earth leakage current
- Find issues faster with comparator function
- Wireless support. Transfers measurements to your smartphone or tablet and allows you to quickly create reports with field photos and drawings. (Optional Wireless Adapter Z3210 is necessary)

Model No. (Order Code) CM4001 (Wireless Adapter Z3210 not included)
CM4001-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

AC Current range	60.00 mA / 600.0 mA / 6.000 A / 60.00 A / 600.0 A, 5 ranges (40 Hz to 1 kHz, True RMS)
Basic accuracy (0-66 Hz):	±1.5% rdg ±5 digit (60.00 mA to 6.000 A), ±2.5% rdg ±5 digit (60.00 A to 600.0 A)
Guaranteed accuracy:	from 0.60 mA to 600.0 A
AC Voltage range	N/A
Frequency range	40.0 Hz to 999.9 Hz
Crest factor	4.5 (4000 counts or less) 3 (more than 4000 counts, 6000 counts or less)
Filter function	Cut off frequency: 180 Hz ±30 Hz at filter ON (-3 dB)
Output function	N/A
Other functions	Comparator function, record Max/Min/Avg value, backlight, data hold, auto power off, AC inrush function
Display	Display refresh rate: 5 times/s
Power supply	LR03 alkaline battery × 1; 32 hours of continuous use
Core jaw diameter	Ø 24 mm (0.94 in)
Dimensions and mass	37 mm (1.46 in) W × 160 mm (6.30 in) H × 27 mm (1.06 in) D, 115 g (4.1 oz.)
Included accessories	Carrying case × 1, Strap × 1, Instruction manual × 1, Operating Precautions × 1, LR03 alkaline battery × 1



CARRYING CASE
Z4001



WIRELESS ADAPTER
Z3210
Simply plug in the Z3210 wireless
adapter and your compatible 1000V
device is Bluetooth® ready



GENNECT Cross
SF4071, SF4072
Mobile app for iOS,
Android

Prevent unexpected downtime! Identify potential problems and avoid large problems

AC LEAKAGE CLAMP METER CM4002, CM4003



CAT IV 300 V

CAT III 600 V

CAT II 300 V

3 years



When Z3210 is
installed



Germany iF Design Award

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Detect minuscule leakage currents with a newly designed sensor. (Core jaw diameter up to Ø 40 mm)
- Broad measurement range extending from leakage currents to load currents
- Complies with the performance standard set forth in IEC/EN 61557-13, an international standard on leak clamp meters
- Solve GFCI and RCD problems quickly
- Speed up passed judgments with the built-in comparator function
- Output function (waveform/RMS): use with a recorder to record waveforms and fluctuations (CM4003 only)
- External power supply: use an optional AC adapter for continuous, long-term measurement (CM4003 only)

Model No. (Order Code) CM4002 (Wireless Adapter Z3210 not included)
CM4002-90 (Bundled with the Wireless Adapter Z3210)
CM4003 (Wireless Adapter Z3210 not included)
CM4003-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

	CM4002	CM4003
AC Current range	6.000 mA, 60.00 mA, 600.0 mA, 6.000 A, 60.00 A, 600.0 A, 5 ranges, True RMS	6.000 mA, 60.00 mA, 600.0 mA, 6.000 A, 60.00 A, 600.0 A, 5 ranges, True RMS
Basic accuracy 45 Hz - 400 Hz:	±1.0% rdg ±5 digit (6.000 mA to 6.000 A), ±1.5% rdg ±5 digit (60.00 A to 600.0 A)	Basic accuracy 45 Hz - 400 Hz: ±1.0% rdg ±5 digit (6.000 mA to 6.000 A), ±1.5% rdg ±5 digit (60.00 A to 600.0 A)
Basic accuracy 15 Hz - 45 Hz, 400 Hz - 2 kHz:	±2.0% rdg ±5 digit	Defined accuracy range: 0.060 mA to 200.0 A
AC Voltage range	N/A	N/A
Frequency range	15.0 Hz to 2000 Hz	15.0 Hz to 2000 Hz
Crest factor	3 (other than 200.0 A range), 1.5 (200.0 A range)	3 (other than 200.0 A range), 1.5 (200.0 A range)
Filter function	Cut off frequency: 180 Hz ±30 Hz at filter ON (-3 dB)	Cut off frequency: 180 Hz ±30 Hz at filter ON (-3 dB)
Output function	N/A	RMS (RMS value output), WAVE (waveform output)
Other functions	Max/ Min/ AVG/ PEAK MAX/ PEAK MIN value display, Display value hold and auto hold, Backlight, Auto power save, Buzzer sound, Event count display, Comparator, Single event recording, Rush current measurement	Max/ Min/ AVG/ PEAK MAX/ PEAK MIN value display, Display value hold and auto hold, Backlight, Auto power save, Buzzer sound, Event count display, Comparator, Single event recording, Rush current measurement
Display	Display refresh rate: 5 times/s	Display refresh rate: 5 times/s
Power supply	AA-size alkaline battery (LR6) × 2; Continuous operating time: 48 hr. (without Z3210 installed), 30 hr. (with Z3210 installed and using wireless communications)	N/A AC Adapter Z3013 (5 V DC, 2.6 A)
Core jaw diameter	Ø 40 mm (1.57 in)	Ø 40 mm (1.57 in)
Dimensions and mass	64 mm (2.52 in) W × 233 mm (9.17 in) H × 37 mm (1.46 in) D, 400 g (14.1 oz.)	64 mm (2.52 in) W × 233 mm (9.17 in) H × 37 mm (1.46 in) D, 400 g (14.1 oz.)
Included accessories	Carrying case Z4003 × 1, Instruction manual × 1, Operating Precautions × 1, AA-size alkaline battery (LR6) × 2	Carrying case Z4003 × 1, Instruction manual × 1, Operating Precautions × 1, AA-size alkaline battery (LR6) × 2



CARRYING CASE
Z4003



CONNECTION CABLE
L9097
For CM4003 Output terminal:
BBC, power terminal: USB C,
1.5 m



AC ADAPTER
Z1013
100 V to 240 V AC
CONVERSION
ADAPTER Z9704
Recording to BBC
(male), output BBC
(male)

WIRELESS ADAPTER
Z3210
Simply plug in the Z3210 wireless
adapter and your compatible 1000V
device is Bluetooth® ready



GENNECT Cross
SF4071, SF4072
Mobile app for iOS,
Android

Easy Pole Clamp-On Ground Resistance Tester with Super Slim Jaw

CLAMP ON EARTH TESTER FT6380-50



CE

C-Tick

WEEE

True RMS

Bluetooth®

When Z3210 is installed

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Earth resistance measurement for multi-grounded systems
- Measure leak current with absolute certainty with highly sensitive 0.01 mA resolution (at 20.00 mA range)
- Measure load current up to 60.0 A range
- Clamp at the narrowest point

Model No. (Order Code) FT6380-50 (Without Adapter Z3210 not included)

FT6380-90 (Included with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement principle	Instrument has two coils for voltage injection and current measurement. From the defined voltage and measured current, the total circuit loop resistance is calculated. Note: Formula grounded systems only. In a multi-grounded system, the larger the number of grounding poles, the more accurate the measured value.
Earthing resistance range	0.20 Ω (0.01 Ω resolution) to 1600 Ω (20 Ω resolution), 10 ranges, Zero suppression: Less than 0.02 Ω, Accuracy: ±1.5% rdg. ±0.02 Ω
AC Current range	20.00 mA (0.01 mA resolution) to 60.0 A (0.1 A resolution), 5 ranges, Zero suppression: Less than 0.05 mA, Accuracy: ±2.0% rdg. ±0.05 mA (30 Hz to 400 Hz, True RMS), Crest factor 5.0 or less (for the 60 A range, 1.7 or less)
Maximum input current (Current measurement)	100 A AC continuous, AC 200 A for 2 minutes or shorter (at 50 Hz/60 Hz, requires derating at frequency)
Memory function	2000 data
Alarm function	For resistance measurement and current measurement, Beeps when measured value is less than or greater than threshold.
Other functions	Data hold, Backlight, Filter, Auto power save, Wireless communication (without Z3210 installed)
Display	LCD, Max. 2,000 count Display refresh rate: Approx. 2 times/sec.
Dust-proof and waterproof	IP40 (EN60529) With jaws closed
Power supply	LR6 alkaline battery × 2
Continuous operating time	Approx. 40 hours (25 Ω measurement, backlight off, without Z3210 installed) Approx. 35 hours (25 Ω measurement, backlight off, with Z3210 installed and using wireless communication)
Maximum measurable conductor diameter	ø 32 mm (1.26 in)
Dimensions and mass	73 mm (2.87 in) W × 218 mm (8.58 in) H × 43 mm (1.69 in) D, 620 g (21.9 oz)
Included accessories	Carrying case, Resistance check loop (1 Ω±2%, 25Ω±7%), Strip, LR6 alkaline battery × 2, Instruction manual

Bundled Accessories
Carrying caseOptions
WIRELESS ADAPTER Z3210
Supplying is the Z3210 wireless adapter and your compatible (IOS) device or SmartPad™ readySoftware
GENNECT Cross SF4071, SF4072
Mobile app for iOS, Android

Earth Testers

Field-capable, Fast-working, Extensive measurement functionality

EARTH TESTER FT6041



Bluetooth[®]

When Z3210 is installed

- Compatible with 4-pole method
- Measure ground resistance without disconnecting ground electrodes
- IP67 protected, built tough to withstand use at harsh sites
- Make measurements, even on concrete by using Earth Nets Module
- Fast measurement! Cord rewinding that doesn't tangle or twist
- Clamp sensor (optional) to fit both narrow and wide bus bars
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel[®] file (Wireless Adapter Z3210 is necessary)

Model No. (Order Code) FT6041

FT6041-91 (Includes clamp sensors FT9947 and CT9948)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	<ul style="list-style-type: none"> • Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method, MEC[®] function, clamp-on measurement (two clamps) • Soil resistivity measurement: 4-pole method • Low-resistance measurement: 4-terminal method, 2-terminal method • Ground potential measurement
Ground potential	0 to 30.0 V RMS, accuracy: $\pm 2.3\%$ rdg. ± 5 digits (590 Hz), $\pm 1.3\%$ rdg. ± 4 digits (DC)
Functions	Live wire warning, auto power save, soil resistivity display (3-pole method only), zero-adjustment, auto-hold, continuous measurement mode, wireless communication (only when Z3210 is connected), buzzer sound, comparator, switching the display, ground potential overload display (when measuring ground resistance)
Operating temperature and humidity	-25°C to 60°C (non-condensing)
Storage temperature and humidity	-25°C to 60°C, 10% to 90% RH or less (non-condensing)
Dustproof and waterproof	IP65, IP67 (EN60529)
Standards	IEC61010 (safety), IEC61204 (EMC), IEC61557-3/IEC61557-10/IEC61557-4 (low-resistance measurement test, earth tester), IEC61557-5 (earth tester)
Power supply	192.6 nickel-cadmium hydride battery x 4 or LR03 alkaline battery x 4
Number of measurements per battery charge ²	192.6 nickel-cadmium hydride battery x 4 or LR03 alkaline battery x 4
Dimensions and mass	Approx. 389 mm (7.44 in) W x 148 mm (5.83 in) H x 48 mm (1.89 in) D, approx. 763 g (26.9 oz.) (including battery, protector)
Included accessories	Auxiliary Earthing Rod L9840 (2 piece set) x 2, Measurement Cable L9845-31 x 1, Measurement Cable L9845-33 x 1, Measurement Cable L9845-51 x 1, Measurement Cable L9841 x 1, Test Lead L97987 x 1, Earth Nets Module L9846 x 2, Carrying Case C0208 x 1, Carrying Case C0209 x 1, Protector x 1, LR6 Alkaline battery x 4, Instruction manual x 1, Operating precautions x 1

1. Measuring Earth resistance using a Clamp

2. -25°C to 40°C, -17°F to 104°F (30% RH or less), 40°C to 60°C, 104°F to 130°F (40% RH or less), 60°C to 50°C, 122°F to 130°F (40% RH or less), 50°C to 40°C, 111°F to 140°F (30% RH or less), 40°C to 65°C, 104°F to 149°F (25% RH or less)

3. NAMF battery x 4 (reference value at 23°C)

Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)					
Ground resistance range	3 Ω (0.0 to 30.0 Ω)	30 Ω (0.1 to 30.0 Ω)	300 Ω (0.00 to 300.0 Ω)	3000 Ω (0.00 to 3000.0 Ω)	30.0 kΩ (0.00 to 30.0 kΩ)	300.0 kΩ (0.00 to 300.0 kΩ)
Accuracy	+1.5% rdg. ± 4 digits				+1.5% rdg. ± 4 digits	
Allowable resistance of auxiliary grounding electrode	5 kΩ		30 kΩ		100 kΩ	
Allowable ground potential				30 V RMS or 42.4 V peak		

MEC function: 4-pole method with clamp sensor; 3-pole method with clamp sensor


Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)			
Ground resistance range	30 Ω (0.00 to 30.0 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300.0 Ω to 3000.0 Ω)	30.0 kΩ (3k Ω to 30.0 kΩ)
Accuracy	+0.5% rdg. ± 4 digits			+0.5% rdg. ± 3 digits

Ground resistance measurement: 2-clamp method

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)		
Ground resistance range	20 Ω (0.00 Ω to 20.00 Ω)	200 Ω (20.0 Ω to 200.0 Ω)	500 Ω (200.0 Ω to 500.0 Ω)
Accuracy	+0.7% rdg. ± 3 digits		+0.5% rdg.

Ground resistance measurement: 2-clamp method

Open-circuit voltage	4.0 V to 6.9 V		
Measuring current	200 mA or more		
Measurement range	30 Ω (0.00 to 20.00 Ω)	300 Ω (20.0 Ω to 200.0 Ω)	3000 Ω (200.0 Ω to 3000.0 Ω)
Accuracy	+0.5% rdg. ± 2 digits +2% rdg. ± 4 digits +0.2% rdg. ± 0.2 Ω		+0.5% rdg. ± 2 digits +2% rdg. ± 4 digits +0.2% rdg. ± 0.2 Ω

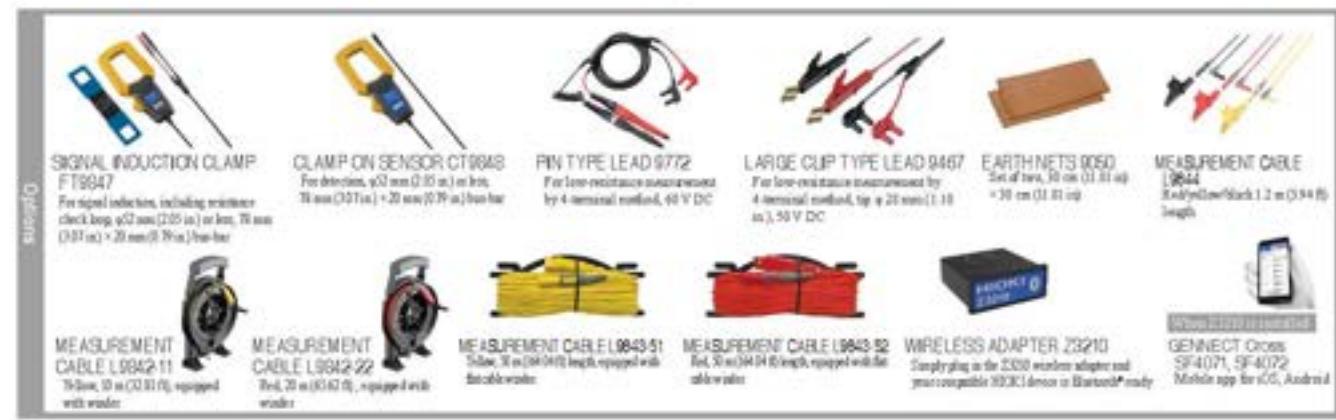

Earth Testers

Tough and Ready for the Field, IP67 Dustproof and Waterproof

EARTH TESTER FT6031-50



Bluetooth®

When Z3210 is installed
CAT II 100 V
CAT III 750 V
CAT IV 600 V



Water
Resistance

- Wireless support. Transfers measurements to your smartphone or tablet and allows you to quickly create reports with field photos and drawings. (Optional Wireless Adapter Z3210 is necessary)
- Excellent noise resistance
- IP67 protected - top of the industry
- Test all ground types from Class A to Class D with a single meter
- Wide 0Ω to 2000Ω measurement range
- Minimize cabling time with innovative earthing rods and cable winder

Model No. (Order Code): **FT6031-50** (Without Adapter Z3210 is included)

FT6031-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement system	Two-electrode method/three-electrode method (switchable)		
Measurement range	20 Ω (0 to 20.00 Ω)	200 Ω (0 to 200.0 Ω)	2000 Ω (0 to 2000 Ω)
Accuracy	±1.5%rdg.±3 digit	±1.5%rdg.±4 digit	±1.5%rdg.±4 digit
Earth voltage	0 to 30.0 V rms		
	Accuracy: ±2.3%rdg.±3 digit (50 Hz/60 Hz), ±1.3%rdg.±4 digit (DC)		
Absolute earth potential	25.0 V rms (DC or sine wave)		
Dustproof and waterproof	IP67 (IEC60529)		
Power supply	LR6 Alkaline battery ×4, Possible number of measurements: 500 times (measurement conditions three-electrode method, measuring 10 Ω at 30-second intervals without Z3210 installed)		
Functions	Live wire warning, zero-adjustment, continuous measurement mode, wireless communication (only when Z3210 is connected), and comparator		
Dimensions and mass	185 mm (7.28 in)W × 111 mm (4.37 in)H × 44 mm (1.73 in)D, 570 g (20.1 oz.) (including batteries and protector, excluding terminal covers and other accessories)		
Included accessories	Auxiliary Earthing Rod L9840 (black/red) ×1, Measurement Cable L9841 (black 4m) ×1, Measurement Cable L9842-11 (yellow 10 m, equipped with winder) ×1, Measurement Cable L9842-22 (red 20 m, equipped with winder) ×1, Carrying Case C0106 ×1, Protector ×1, LR6 Alkaline battery ×4, Instruction manual ×1		

To ensure safety, use the optional Test Lead L9797 when making measurements using the two-electrode method.

L9844: For making electrical contact, L9797: For two-electrode method (not included)					
Options					

Classic Ground Resistance Tester via 3-Pole Method with Easy Cord Winding System

ANALOG EARTH TESTER FT3151



CAT III 600 V



- Three-electrode method, Two-electrode method (Simple Measurement)
- Wide measurement range for 0 to 1150 Ω, based on EN standard
- Switchable measurement frequency to reduce the effects of power supply harmonics
- Dramatically faster setup: Comes with improved earthing rods and cord winders.

Model No. (Order Code): **FT3151**

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement system	AC potentiometer method, Three-electrode method/two-electrode method (switchable)		
Measuring frequency:	575 Hz/600 Hz		
Measurement current:	Three-electrode method: 15 mA rms or less; Two-electrode method: 3 mA rms or less		
Open circuit voltage:	50 V AC rms or less		
Measurement range	10 Ω (0 to 11.5 Ω)	100 Ω (0 to 115.0 Ω)	1000 Ω (0 to 1150 Ω)
Nominal Deviation	±0.25 Ω	±2.5 Ω	±25 Ω
Functions	Auxiliary earth resistance check S (Py H/C)		
Earth potential measurement	0 to 30 V, Nominal Deviation: ±3.0 % fs.		
Power supply	LR6 (AA) Alkaline battery ×6, 1100 times operation (at 30 sec. measurement 30 sec. rest cycle)		
Dimensions and mass	164 mm (6.46 in)W × 119 mm (4.69 in)H × 88 mm (3.46 in)D, 760 g (26.8 oz.)		
Included accessories	Auxiliary Earthing Rod L9840 (1 piece set) ×1, Measuring cable L9841 (alligator clip, black/grey 4 m (13.1 ft) length), Measurement Cable L9842-11 (yellow 10 m (32.8 ft) length, equipped with winder) ×1, Measurement Cable L9842-22 (red 20 m (65.6 ft) length, equipped with winder) ×1, LR6 (AA) Alkaline battery ×6, Carrying Case C0106 ×1, Instruction manual ×1		

To ensure safety, use the optional Test Lead L9797 when making measurements using the two-electrode method.

L9844: For making electrical contact, L9797: For two-electrode method (not included)					
Options					

Voltage Detectors/Phase Detectors

Non-Metallic Contact Voltage Detector with LED Light

VOLTAGE DETECTOR 3481



White LED light illuminates dim locations.



- Non-contact detection of AC voltage from 40 V to 600 V with bright LED light
- Pen-style, compact detector with pocket clip
- Both visual and audible voltage detection indication
- Meets safety standards for CAT IV 600 V environments
- Prevent dead batteries with battery self-check function and auto power-off function

Model No. [Order Code] 3481-20

■ Basic specifications

Measurement function	Voltage detection
Operating voltage range	40 V to 600 V AC (When brought into contact with a 2 mm ² insulated cable equivalent to 600 V polyvinyl chloride insulated wire)
	Maximum sensitivity variable range 40 V to 60 V AC (80 V at the time of shipment)
Operating frequency	50 Hz/ 60 Hz
Pilot light	Red LED lights up and the buzzer sounds when the wire is live
Battery check	White LED is dim or out when the batteries are low
Auto power off	The power will be turned off automatically if the instrument remains idle for 3 minutes after the power is turned on.
Power supply	LR44 button alkaline batteries ×3, Continuous use: 5 hr (Power ON standby state)
Dimensions and mass	20 mm (0.79 in)W × 126 mm (4.96 in)H × 15 mm (0.59 in)D (excluding projections), 30 g (1.1 oz) (including LR44 button alkaline batteries)
Included accessories	Instruction manual ×1, LR44 button alkaline batteries ×3 (for trial purpose only)

Digital Phase Rotation Meter with Three-Phase Voltage Measurement Functionality

DIGITAL PHASE DETECTOR PD3259-50



Bluetooth®
When Z3210 is
installed

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Available to check the unbalance rate and vector diagram in our free app GENNECT Cross
- World's first non-metallic contact voltage detection and testing
- Simply clip onto wire insulation
- Phase detection check and line-to-line voltage inspection at the same time
- Easy and intuitive phase detection check with backlight and buzzer
- Ideal for work certification photos, offering simultaneous display of phase sequence and 3-phase voltage

Model No. [Order Code] PD3259-50 (Without Wireless Adapter Z3210 not included)
PD3259-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

Detection functions	Positive phase, negative phase (Three-phase 3-wire, Three-phase 4-wire, open phase, prediction of ground phase (Three-phase 3-wire))
Measurement parameters	Three-phase AC voltage (line-to-line voltage and voltage to ground), Frequency
	• Voltage measurement accuracy: ±2.0% rdg. ±8 digit.
	• Frequency measurement accuracy: ±0.5% rdg. ±1 digit.
	• Response time: 3 s or less, Display update rate: 500 ms
Measurement targets	Covered cables, Metal portions *Use on shielded cables not supported
	Three-phase 90.0 to 520.0 V AC (45 to 66 Hz)
Diameter of measurable conductors	Finished outer diameter: 6 to 30 mm (0.24 to 1.18 in)
Maximum rated voltage to earth	600 V AC (CATIV)
Environmental protection	Main unit (excluding voltage sensor): IP54 (IEC60529) dustproof and waterproof
Other functions	Hold function, Backlight, Buzzer, Auto power-off, Low battery warning, Drop proof (on concrete, 1 m/1 time)
Power supply	AA alkaline batteries (LR6) ×4, Maximum rated power: 3 VA, Continuous operating time: 5 hours (Backlight off, standby state, Without Z3210)
Dimensions and mass	84 mm (3.31 in)W × 146 mm (5.75 in)H × 46 mm (1.81 in)D, 590 g (20.8 oz, including batteries), cord length: 0.5 m (1.64 ft)
Included accessories	AA alkaline batteries (LR6) ×4, Instruction manual ×1, Carrying case C0203 ×1, Color clip (White ×2, red ×2, blue ×2, yellow ×2), Spiral tubes (black ×5)

Note: Multi-core cables, thick cables, and dirty cables may not be measured accurately.



Phase Detector

Easy-To-Read Arrow and No-Metal-Contact Clips for the Ultimate in Safety

PHASE DETECTOR PD3129-10



■ Basic specifications

Functions	Phase detection (positive and negative)
Voltage detection method	Static induction
Voltage range	70 to 1000 V AC (50/60 Hz) (line wave, continuous input)
Frequency range	45 Hz to 66 Hz
Object to be connected	7 mm (0.28 in) to 40 mm (1.57 in) of insulated wiring.
Display	Phase detection : Positive ; 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative ; 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Battery check function	Power ON lamp: lights up (Power ON), blinks (Battery LOW)
Auto power off	Auto shut off if no activity is detected after power is turned ON for 15 minutes
Power supply	R6P (AA) manganese battery ×2, Continuous use: 70 hr
Dimensions and mass	70 mm (2.76 in)W × 75 mm (2.95 in)H × 30 mm (1.18 in)D, 240 g (8.5 oz), Cord length: 0.7 m (2.30 ft)
Included accessories	Carrying case ×1, Strap ×1, Spiral tube ×1, Instruction manual ×1, R6P (AA) manganese battery ×2

- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- CAT III 1000V
- Rotating LED Indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase
- Magnetic base allows the instrument to be secured on a distribution panel

Model No. (Order Code) PD3129-10 (Large clips)

Easy-To-Read Arrow and No-Metal-Contact Clips for the Ultimate in Safety

PHASE DETECTOR PD3129



■ Basic specifications

Functions	Phase detection (positive and negative)
Voltage detection method	Static induction
Voltage range	70 to 600 V AC (50/60 Hz) (line wave, continuous input)
Frequency range	45 Hz to 66 Hz
Object to be connected	2.4 mm (0.09 in) to 17 mm (0.67 in) of insulated wiring.
Display	Phase detection : Positive ; 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative ; 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Battery check function	Power ON lamp: lights up (Power ON), blinks (Battery LOW)
Auto power off	Auto shut off if no activity is detected after power is turned ON for 15 minutes
Power supply	R6P (AA) manganese battery ×2, Continuous use: 70 hr
Dimensions and mass	70 mm (2.76 in)W × 75 mm (2.95 in)H × 30 mm (1.18 in)D, 200 g (7.1 oz), Cord length: 0.7 m (2.30 ft)
Included accessories	Carrying case ×1, Strap ×1, Spiral tube ×1, Instruction manual ×1, R6P (AA) manganese battery ×2

- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- Rotating LED Indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase
- Magnetic base allows the instrument to be secured on a distribution panel

Model No. (Order Code) PD3129

Cloud service for the GENNECT series

GENNECT Cloud SF4180



- Connects to the GENNECT series to provide added value through cloud services.
- Makes measurement more convenient with features like exchanging data via the cloud and enabling remote measurement.
- Offers a range of plans and payment methods.

Model No. (Order code)	SF4180	(Free plan with basic functions)	Free
	SF4181-01	(GENNECT Cloud Standard 1 month license)	Fees apply
	SF4181-03	(GENNECT Cloud Standard 3 months license)	Fees apply
	SF4181-12	(GENNECT Cloud Standard 12 months license)	Fees apply
	SF4182-01	(GENNECT Cloud Pro 1 month license)	Fees apply
	SF4182-03	(GENNECT Cloud Pro 3 months license)	Fees apply
	SF4182-12	(GENNECT Cloud Pro 12 months license)	Fees apply

■ Basic specifications

	Trial (Pre-use limited to 3 months)	Free (Free)	Standard (Fees apply)	Pro (Fees apply)
Monitor function	Collect and save GENNECT polled data (logged at a 1 min. interval) and display it in real time.			
Drive functionality	Manage and export GENNECT polled data and instrument data files.			
Alarm function	Alarm notification destinations: Email, Microsoft Teams, Slack, LINE, GENNECT Cross			
Console function	-	-	Control instruments remotely (not supported by GENNECT Cross)	
Cloud storage space	500 MB	5 GB	50 GB	500 GB
No. of users / No. of teams / No. of measurement groups	1 / 0 / 1	3 / 3 / 1	10	100
Max. no. of alarms per measurement group	1	3	30	100
WebAPI use	No	No	No	Yes

You can also set up automatic ongoing payments (a subscription) by credit card.

For details of GENNECT Cloud and compatible products, please visit the webpage below.

<https://www.gennect.net/en/cloud>



Get Results from the Job Site in Real-Time & Capture Data on the PC while Testing Remotely GENNECT One SF4000

GENNECT One



PC not included

- Connect measuring instruments to a PC via a LAN cable.
- Acquire measurement values from multiple measuring instruments at regular intervals and display them on a graph in real time.^①
- Lay out measurement values on the image and able to check graphically.^②
- Operate measuring instruments connected via LAN from a PC.^③
- Automatically transfer files saved on a LAN-connected measuring instrument to a PC.^④
- Software automatically recognizes LAN-connected measuring instrument.
- Manage and save results with software.
- List MAX, MIN and AVG values (Display time of MAX & MIN data).
- Real-time calculation of measurement values of arbitrary measurement items (calculation between channels).
- Automatically output measurement data to daily/weekly/monthly report or CSV file.

^① Max. number of connections: 30 units. The measurement value (current location) displayed by the instrument is acquired at a fixed interval (maximum 1 second) by the PC timer.

^② Max. number of connections: 30 units.

^③ Max. number of connections: 15 units.

Model No. (Order code)	SF4000	(Application for Windows)	Free
------------------------	--------	---------------------------	------

■ Basic specifications (Free software)

[Logging]

Functions	Graph and list displays that present measured values from LAN-connected instruments in real time. [*] Acquire measured values (current values) displayed on instruments at a set interval (as short as 1 sec.) using the computer's timer.
Logging intervals	1, 2, 5, 10, 30 sec. / 1, 2, 5, 10, 30 min. / 1 hour
Number of log items	Max. 512 items + 16 items (calculation between channels) [#] Maximum 32 items when simultaneously displaying graphs
Recording time	Recording time: Continuous measurement, set time File segmentation: 1 day, 1 hour Logging stops when the storage capacity of the PC is below 512 MB

[Dashboard]

Functions	Display measured values from LAN-connected measuring instruments on optional backgrounds of monitors and alarms. [*] Acquire measured values (current values) displayed on instruments at a set interval (as short as 1 sec.) according to the computer's timer.
Monitoring intervals	1, 2, 5, 10, 30 sec. / 1, 2, 5, 10, 30 min. / 1 hour
Number of measured parameters	Max. 512 items + 16 items (calculation between channels)

[Remote control]

Functions	Control LAN-connected instruments from a computer
-----------	---

[File transfer (Manual)]

Functions	Acquire files stored in LAN-connected instruments from a PC The BT1554-50 series can be acquired via USB.
-----------	--

[File transfer (Automatic)]

Functions	Automatically send files saved by LAN-connected instruments to a computer.
-----------	--

[Other functions]

Instrument clock synchronization	Set the clocks of measuring instruments connected via LAN to the PC (manual, automatic)
Files loading	Data file obtained by GENNECT Cross for iOS/Android Note: Logging, Onsite Measurement, image and battery formats only Note: No direct Bluetooth® connection is possible; please use the smartphone app for Bluetooth® data collection Data acquired by GENNECT Remote
Others	CSV output (battery, logging), data statistics (logging), report generation (battery, logging)

For details of GENNECT One and compatible products, please visit the webpage below.


<https://www.gennect.net/en/one>



Share data via the
GENNECT Cloud

Free App for Easy Instrument Connectivity, Data Recording, and Report Creation GENNECT Cross SF4071, SF4072

X GENNECT Cross



- Connect Instruments to your smart phone or tablet
- Save all measured values on your smart phone
- Use the logging function to save measured values automatically at a set interval
- Use the simple oscilloscope function to view current and voltage waveforms on your smart phone (CM/DT series, etc.)
- Continuously measure the internal resistance and voltage of lead-acid batteries (BT3554-50 series only)

Model No. (Order Code) SF4072
SF4071

(Mobile app for Android)
(Mobile app for iOS)

Free
Free



■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.

■ SF4071, SF4072 Basic specifications (Free software)

Bluetooth® connection	Bluetooth® LE
OS which GENNECT Cross can be installed	SF4071: iOS 10.0 or later, iPadOS 13.0 or later SF4072: Android™ 5.0 or later
Measurement data management	Local, e-mail / cloud sharing
Report function	Various template reports
Picture / Memo recording	OK
Measurement functions	General measurement: OK Logging: OK Pass/Fail judge: OK Photo Drawing with Values Measurement: OK Waveform display: CM/DT series, etc. Battery: BT3554-50 series only Detect electricity theft: CM3286-50 only Harmonic measurement: CM/DT series compatible with Z3210, etc. Lux measurement: FT425 only Event Recording: CM/DT series compatible with Z3210, etc. Vector Measurement: PD3259-50 only
	The above is an example. For details, please refer to the catalog and websites of compatible products. Hardware upgrade for measuring instruments: Measurement instruments compatible with Z3210

For details of GENNECT Cross and compatible products, please visit the webpage below:

<https://www.hioki.net/en/cross>



Share data via the GENNECT Cloud

Get connected to create and share graphical reports in a flash!

WIRELESS ADAPTER Z3210



- Increase your work efficiency, by eliminating human errors from manual reporting
- Transfer readings on instruments to easy-to-read graphical reports to prove integrity
- Increase your work productivity & save costs!
- Provide additional new functions for Hioki instruments such as waveform display & more!
- Compliance with wireless regulations in more than 50 countries and regions

Model No. (Order Code) Z3210

Note) Z3210 cannot be used by itself. Wireless communication will be possible by connecting to a compatible measuring instrument.

■ Basic specifications

Operating environment	Indoors, pollution degree 2, operable at an altitude specified in specifications of each measuring instrument to which the adapter is attached
Operating temperature and humidity (Storage temperature and humidity)	-30°C (22°F) to 70°C (158°F), 90% RH or less (no condensation)
Standards	Safety: EN61010 RF: EN300 328 RF EMC: EN301 489-1, EN301 489-17 Exposure: EN62479
Maximum attaching/detaching count	5000 times
GENNECT Cross App confirmed compatible O/S	iOS 13 or later, Android 8 or later, Bluetooth® 4.0 or later
Bluetooth® communication distance	About 10 m (line-of-sight distance)
Product warranty period	3 years (do not exceed the maximum attaching/detaching count)
Dimensions and mass	Approx. 16.4 mm (0.65 in)W × 6.7 mm (0.26 in)H × 15.6 mm (0.61 in)D, 1.5 g (0.05 oz)
Included accessory	Instruction manual



By synergizing complementary technologies, HIOKI delivers solutions that fully meet next-generation needs.

Ours is a global era underpinned by state-of-the-art electronic technologies. HIOKI's bare board testing systems and populated board testing systems are hard at work in plants that manufacture printed circuit boards with increasingly advanced, high-density designs. HIOKI's printed circuit board testing systems are an ideal choice for manufacturing plants seeking to achieve rational production through high precision, reliability, and ease of use and for companies striving to ship products with the world's fastest cycle times.

With product series ranging from flying probe systems designed to test small lots of boards representing multiple models to bed-of-nails systems engineered for use with mass-produced boards, HIOKI's ATE offerings deliver optimized functionality and cost performance for bare board and populated board testing processes. HIOKI's printed circuit board testing systems, which can accommodate BGAs, CSPs, boards with embedded passive and active devices, and silicon interposers, continue to evolve. We invite you to put them to work in your own demanding applications.

Bare Board and Package Testing



Populated Board Testing



Computer and peripherals not included in FA1220. A separate computer is required in order to use the FA1220 via a standard mouse.

■ IN-CIRCUIT TESTER FA1220

Bare Board and Package Testing

Improved efficiency and reliability take board production to the next level

FLYING PROBE TESTER FA1815-20



CE compliance available. Inquire for detail.

- Gentle low voltage insulation resistance measurement of 10 V, 100 GΩ
- Achieves both high-speed testing up to 100 points/sec. and improved probing accuracy
- Includes a Flexible Fixture suitable for various shapes, such as circular and square
- Enhanced measurement functions for substrates with embedded components, including capacitance measurement and diode testing

Model No. (Order Code) FA1815-20 (Horizontal double-sided)

■ Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	II72 series, CP1072 series, CP1073 series
Number of test steps	Max. 4,000,000 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1,000 kΩ DC constant-current resistance measurement: 40.0 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4,000 Ω to 40.0 MΩ Insulation resistance measurement: 1,000 kΩ to 100.0 GΩ Low voltage insulation resistance measurement: 1,000 MΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 pF to 10.0 μF Leakage current measurement: 1,000 pA to 100.0 mA High-voltage resistance measurement: 1,000 kΩ to 100.0 GΩ Capacitor insulation measurement: 1,000 kΩ to 250.0 MΩ Open measurement: 4,000 Ω to 4,000 MΩ Short measurement: 400.0 mΩ to 40.0 kΩ LSI connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.0 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.0 pF to 10.0 μF AC constant-voltage inductance measurement: 1,000 pH to 1,000 nH
<Embedded device board test>	Judgment range: 99.9% to >99.9% or absolute value Movement resolution: XYZ: 0.1 μm Minimum pad pitch: Top surface: 34 μm (with CP1075-09) Bottom surface: 44 μm (with CP1075-09) Minimum pad size: Top surface: 4 μm square (with CP1075-09) Bottom surface: 14 μm square (with CP1075-09) Measurement speed: Max. 100 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement) Testable board size: Thickness: 1 mm (0.04 in.) to 12 mm (0.47 in.) Outer dimensions: 30 mm (1.18 in.) W × 30 mm (1.18 in.) D to 340 mm (13.39 in.) W × 340 mm (13.39 in.) D Maximum testable area: 340 mm (13.39 in.) W × 340 mm (13.39 in.) D Clamp method: Flexible Fixture, Vacuum Unit for Capacitance Test (Options) Air requirements: Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR) Power supply: 200 V, 220 V, 230 V, 240 V AC single-phase (specified at time of order); 50/60 Hz; maximum power consumption: 5 kVA Dimensions and weight: 1355 mm (53.35 in.) W × 1190 mm (46.85 in.) H × 1265 mm (49.8 in.) D (excluding protruding parts); 1100 kg (2430 lb); 38800 oz; 1275.5 kg

Evaluate high-density package board reliability with super-high-precision probing

FLYING PROBE TESTER FA1813



■ Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	II72 series, CP1072 series, CP1073 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1,000 kΩ DC constant-current resistance measurement: 40.0 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4,000 Ω to 40.0 MΩ Insulation resistance measurement: 1,000 kΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 pF to 10.0 μF Leakage current measurement: 1,000 pA to 100.0 mA High-voltage resistance measurement: 1,000 kΩ to 100.0 GΩ ¹ Capacitor insulation measurement: 1,000 kΩ to 250.0 MΩ ¹ Open measurement: 4,000 Ω to 4,000 MΩ Short measurement: 400.0 mΩ to 40.0 kΩ LSI Connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.0 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.0 pF to 10.0 μF AC constant-voltage inductance measurement: 1,000 pH to 1,000 nH
<Embedded device board test>	Judgment range: 99.9% to >99.9% or absolute value Movement resolution: XY: 0.1 μm / pulse; Z: 1 μm / pulse Minimum pad pitch: Top surface: 32 μm (with CP1075-09) Bottom surface: 44 μm (with CP1075-09) Minimum pad size: Top surface: 2 μm (with CP1075-09) Bottom surface: 4 μm (with CP1075-09) Measurement speed: Max. 76 points/sec. (0.5 mm movements, 4-arm simultaneous probing, capacitance measurement) Testable board size: Thickness: 0.5 mm (0.02 in.) to 2.5 mm (0.10 in.) Outer dimensions: 30 mm (1.18 in.) W × 30 mm (1.18 in.) D to 400 mm (15.75 in.) W × 330 mm (12.99 in.) D Maximum testable area: 398 mm (15.67 in.) W × 304 mm (12.97 in.) D Clamp method: 2-side holder Air requirements: Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR) Power supply: 200 V, 220 V, 230 V, 240 V AC single phase (specified at time of order); 50 Hz/60 Hz; Maximum power consumption: 5 kVA Dimensions and weight: 1355 mm (53.35 in.) W × 1200 mm (47.24 in.) H × 1265 mm (49.8 in.) D (excluding protruding parts); 1130 kg (2489 lb); 38860 oz; 1276.5 kg

- Four-terminal measurement with a minimum pad diameter of 28 μm
- Reduce probe marks in combination with the latest probes
- Defect analysis using Hioki's Process Analyzer

Model No. (Order Code) FA1813 (Horizontal double-sided)

Bare Board and Package Testing

Significantly lower testing costs while maintaining high-speed performance

FLYING PROBE TESTER FA1816



- High-speed pattern testing using the capacitive measurement method
- Reduce probe marks in combination with the latest probes
- Significantly improved operability

Model No. (Order Code) FA1816 (Horizontal single-sided)

■ Specifications Overview

Number of arms	2 (top surface × 2)
Compatible probes	1172 series, CP1072 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 µΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 500.0 MΩ AC constant-voltage capacitance measurement: 100.0 pF to 10.00 µF Leakage current measurement: 1.000 pA to 100.0 mA High-voltage resistance measurement: 1.000 kΩ to 500.0 MΩ Capacitor insulation measurement: 1.000 kΩ to 250.0 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ
Test parameters and measurement for MLCC tests	AC constant-voltage capacitance measurement: 100.0 pF to 100.0 µF
Judgment range	99.9% to +999.9% or absolute value
Minimum pad pitch	40 µm (with CP1075-09)
Minimum pad size	10 µm (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.1 mm movements, 2-arm simultaneous probing, capacitance measurement)
Testable boards	50 mm (1.97 in) W × 50 mm (1.97 in) D to 610 mm (24.02 in) W × 510 mm (20.08 in) D, Thickness 0.1 mm (0.004 in) to 3.2 mm (0.13 in)
Maximum testable area	610 mm (24.02 in) W × 30 mm (20.08 in) D
Air requirements (only with the option for air equipment)	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single phase (specify at time of order), 50 Hz/60 Hz, Maximum power consumption: 3 kVA
Dimensions and mass	1303 mm (51.30 in) W × 1194 mm (47.01 in) H × 1167 mm (45.94 in) D (excluding protruding parts), 900 kg (1974 lb)

Detect Latent Defects on High-Density Printed Wiring Boards with Absolute Reliability

FLYING PROBE TESTER FA1817



■ Specifications Overview

Number of arms	4 (front × 2, rear × 2)
Compatible probes	1172 series, CP1072 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 µΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ ¹ Insulation resistance measurement: 1.000 kΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 pF to 10.00 µF Leakage current measurement: 1.000 pA to 100.0 mA High-voltage resistance measurement: 1.000 kΩ to 100.0 GΩ Capacitor insulation measurement: 1.000 kΩ to 250.0 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ LSI Connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.00 pF to 100.0 µF AC constant-voltage inductance measurement: 1.000 µH to 1.000 mH
Judgment range	99.9% to +999.9% or absolute value
Minimum pad pitch	45 µm (with CP1075-09)
Minimum pad size	15 µm (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable boards	Standard specification: 50 mm (1.97 in) W × 50 mm (1.97 in) H to 610 mm (24.02 in) W × 510 mm (20.08 in) H, Thickness 10 mm (0.39 in) to 3.2 mm (0.13 in) Porous air board damp option: 50 mm (1.97 in) W × 70 mm (2.76 in) H to 610 mm (24.02 in) W × 510 mm (20.08 in) H, Thickness 0.6 mm (0.02 in) to 5.1 mm (0.24 in)
Maximum testable area	604 mm (23.79 in) W × 504 mm (19.84 in) H
Air requirements (only with the option for air equipment)	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specify at time of order), 50 Hz/60 Hz, Maximum power consumption: 3 kVA
Dimensions and mass	1485 mm (58.46 in) W × 1950 mm (76.77 in) H × 800 mm (31.50 in) D, (excluding protruding parts), 1070 kg (2374.5 lb)

Installation area: FA1817 can inspect boards (610 × 510 mm) of the same size as the conventional Model 1271, but the installation area for the equipment is even smaller than the conventional Model 1270 (inspection board size is smaller than on the 1271), contributing to space saving measures. In addition, a back door is available as an option, supporting easier maintenance.

- Optimization of probe movement reduces inspection time by up to 20%
- Reduce probe marks in combination with the latest probes
- Fault analysis using newly developed "Process Analyzer"

Model No. (Order Code) FA1817 (Vertical double-sided)

Bare Board and Package Testing

Complete Electrical Testing of High-Function Boards with a Single Unit. Max. 100 points/sec.

FLYING PROBE TESTER FA1283



Horizontal and both sides

- 15 µm square high precision contact and high speed probing
- Max. 100 points/sec ultra-high speed inspection
- Inspect general bareboards to fine and high density substrates such as flexible substrate and CSP
- Full lineup of functions including capacitance measurement and testing of diodes and other embedded components


Model No. (Order Code) FA1283-01 (without board-carrier)
FA1283-11 (with board-carrier)

■ Specifications Overview

Number of arms	4 (2 each, top and bottom)
Mountable probes	1572 series
Number of test steps	Max. 900,000 steps
Measurement parameters and measurement ranges	Resistance: 40.00 µΩ to 100.0 MΩ Capacitance: 10.00 fF to 40.00 nF Inductance: 10.00 µH to 100.0 mH Diode VZ measurement: 0.000 V to 25.00 V Insulation resistance: 200.0 Ω to 100.0 GΩ Capacitance/Insulation resistance: 200.0 Ω to 10.00 MΩ High voltage resistance: 200.0 Ω to 25.00 GΩ High voltage short resistance: 400.0 mΩ to 400.0 kΩ Leak current measurement: 100.0 mA to 10.00 mA Zener diode VZ measurement: 0.000 V to 25.00 V Digital transistor measurement: 0.000 V to 25.00 V Photo coupler measurement: 0.000 V to 25.00 V Continuity test: 400 mΩ to 1.000 kΩ Open test: 4.000 Ω to 4.000 MΩ Short test: 400.0 mΩ to 40.00 kΩ DC voltage measurement: 40.00 mV to 25.00 V
Judgment range	-99.9% to +99.9% or absolute value
Minimum pad pitch	35µm (with CP1075-09) (when using FA1971-01), 40µm (with CP1075-09)
Minimum pad size	2µm (with CP1075-09) (when using FA1971-01), 10µm (with CP1075-09)
Measurement speed	Max. 100 points/sec (XY movements of 0.1 mm, 4-arm simultaneous probing, when capacitance measurement)
Testable board size	Thickness: 0.1 mm to 2.5 mm (0.10 in) Outer dimensions: 50 mm (1.97 in) W × 50 mm (1.97 in) D to 400 mm (15.75 in) W × 330 mm (12.99 in) D
Maximum testable area	400 mm (15.75 in) W × 324 mm (12.76 in) D
Board clamping	Board 2-side chuck method (with tension function)
Air requirements	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specify at time of order), 50/60 Hz, 5kVA
Dimensions and mass	1360 mm (53.54 in) W × 1200 mm (47.24 in) H × 1280 mm (50.39 in) D, (Excluding protruding parts), 1,100 kg (38,800.7 oz)

1/2 Data Generation Time With New Platform, 3-in-1 Editing Software for Bare Board Testing

FEB-LINE INSPECTION DATA CREATION SYSTEM UA1781

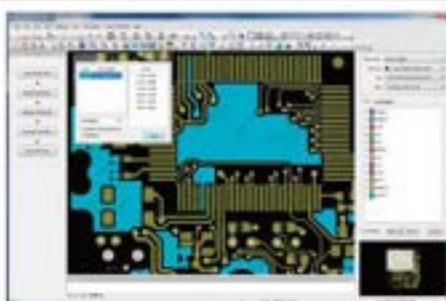

Gerber editing software that embodies the know-how for substrate testing

Built-in commands eliminate need for special know-how

- Easily generate test points even on the inner layer for cavity structures (One-point test-point generation)
- Expanded touch panel functions for printed boards (Optional E7001)
- Support for built-in component boards
- High-precision relay-point deletion functionality that reliably delete only the unnecessary relay-points

Model No. (Order Code) UA1781 (Permanent license version)

■ Specifications Overview

License content	Install CD, license key (USB), instruction manual *Note: Please purchase hardware such as PC and monitor separately.
Supported OS	Windows 10 Pro 64-bit
Data entry function	Gerber file, aperture file, drill file, U-Art database, DXF (optional E7001)
Test data generation function	Net information generation, part test data generation, test point generation, relay-point deletion
Test data output format	SFD, SPDX, NND, IND, CON, COT, COEX, PRTX, LAYOUT

Options

Model No. (Order Code)	Product Name	Remarks
Options		
E7001	FEB-LINE TOUCH PANEL DESIGN EXTENSION SOFTWARE	For the UA1781
E7002	FEB-LINE TEST FIXTURE FUNCTION SOFTWARE	For the UA1781

Note: Inquire separately about setup of the E7001.

Bare Board and Package Testing

Meeting Ever Increasing Demands for Greater Analytical Power, Faster Testing Speeds and Reduced Costs

FLYING PROBE TESTER FA1811



- Achieve both high precision contact and high-speed probing in a space of 10 µm.
- Double test method delivers an operation rate of 100%.
- Full-net insulation continuity test using resistance: x10 max. speed*
- High-speed test using capacitance: x2 max. speed*

(* Compared to the double-sided 4-arm FLYING PROBE TESTER)

Model No. (Order Code) FA1811 (4096 channels built-in)

Testing requires either the CP1165-11 or the E4101.

■ TEST FIXTURE CP1165-11 Specifications

Board dimensions	Square 10 mm (0.39 in) to Square 80 mm (3.15 in)
Supported range of board thicknesses to clamping	0.1 mm (0.004 in) to 5.0 mm (0.20 in)
Notes	Designed for each board
Board clamping	Holder, shutter, and vacuum pump required separately
Supported pad diameter	200 µm or larger, 300 µm or larger when using Kelvin probe
Max. number of pins	8192

■ Specifications Overview

Not CE Marked	Number of arms	2 (Upper: 2)
	Mountable probes	CP1073 series
Measurement parameters and measurement ranges	Resistance measurement:	400.0 µΩ to 40.00 MΩ 4.000 Ω to 4.000 MΩ (T)
	Capacitance measurement:	100.0 fF to 10.00 pF
	MLCC measurement:	100.0 nF to 100.0 µF
	Insulation measurement:	1.000 kΩ to 100.0 GΩ 1.000 kΩ to 250.0 MΩ (T)
	Capacitor insulation measurement:	1.000 kΩ to 10.00 MΩ
	High-voltage resistance measurement:	1.000 kΩ to 100.0 GΩ 1.000 kΩ to 250.0 MΩ (T)
	Leak current measurement:	1.000 µA to 10.00 mA
	Continuity:	400 mΩ to 1.000 kΩ
	Open measurement:	4.000 Ω to 4.000 MΩ
	Short measurement:	400.0 mΩ to 40.00 kΩ
	(T): When measuring via the TEST FIXTURE	
Judgment range	99.9% to +999.9% or absolute value	
Total probing precision	10 µm (Square)	
Probing pitch	Min. 40 µm (when using CP1073-01)	
Supported range of board thicknesses to clamping	Follow option on BGA side	
Probing area	75 mm (2.95 in) × 75 mm (2.95 in)	
Power supply	200 V AC ±10% (three phase) 50/60 Hz (200 V, 220 V AC specify at time of order) Maximum power consumption: 5 kVA	
Dimensions and mass	1300 mm (51.18 in) W × 1670 mm (65.75 in) H × 1700 mm (66.93 in) D (Excluding protruding parts), 2000 kg (70,546.7 oz)	


■ VACUUM UNIT FOR CAPACITANCE TEST E4101 Specifications

Board dimensions	50 mm (1.97 in) W × 90 mm (3.54 in) D to 105 mm (4.13 in) × 250 mm (9.84 in)
Supported range of board thicknesses to clamping	0.1 mm (0.004 in) to 0.8 mm (0.031 in)
Notes	To accommodate the entire range of substrate thickness, it is necessary to replace the spacer for substrate thickness adjustment.
Board clamping	VACUUM PUMP E4006 required separately

Data Creation Software

Data Analysis Software for Detecting Latent Defects on PASS Boards

DATA ANALYSIS SOFTWARE UA1801

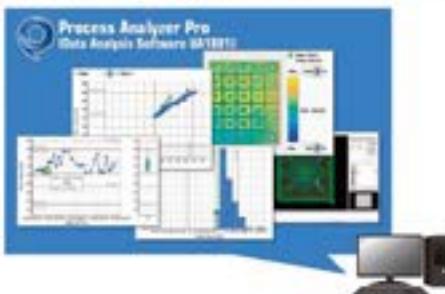

Detect Latent Defects Hidden in PASS Boards

- Perform statistical analysis using the latest AI technologies
- Detect significant points that can cause latent defects
- Provide feedback to improve quality in board production and design processes

Model No (Order Code) UA1801-01 (Limited 1-year license)
UA1801-02 (Unlimited license)

Download the three versions of Process Analyzer here.
Note: The Pro and Free versions use the same application file. To access Pro features, you must purchase a license key.
https://www.hioki.com/en/equipment/0020fa0017_pav/



■ Specifications Overview

License contents	License key (USB) only *Note: Please purchase computer, display and other hardware separately and download the installer and documentation from Hioki's website.
Supported test equipment	FA1813, FA1815-20, FA1817, FA1816, FA1811, FA1281-01, FA1282-11, FA1283-01, FA1283-11, I281, I280-11, I280-12, I281-50, FA1116-03, I116, I116-01, I116-42, I116-42, I116-21, I116-22, I116-23, I116-24, I116-32, I116-42, I116-43, I116-44, I116-45, I116-51, I116-52, I116-53, I116-54, I116-62, I116-71, I116-72, I116-73, I116-74, I116-75, I1270, I271
Operating environment	Operating system: Windows 10 Pro 64-bit; CPU: x64 processor running at 1.0 GHz or better (2.0 GHz or better recommended); memory: 2 GB or better (4 GB or better recommended); other software: Microsoft .NET Framework 4.6 and appropriate language pack.
Supported languages	English, Japanese, Simplified Chinese, Traditional Chinese, Korean

Real-time anomaly monitoring

Process Analyzer Client (E4781)




Client

Adding Process Analyzer Pro's Singularity Detection Function to Inspection Equipment.

Detects latent defects in real time of the same time as normal inspection.

- Supported Products FA1811, FA1813, FA1816, FA1817

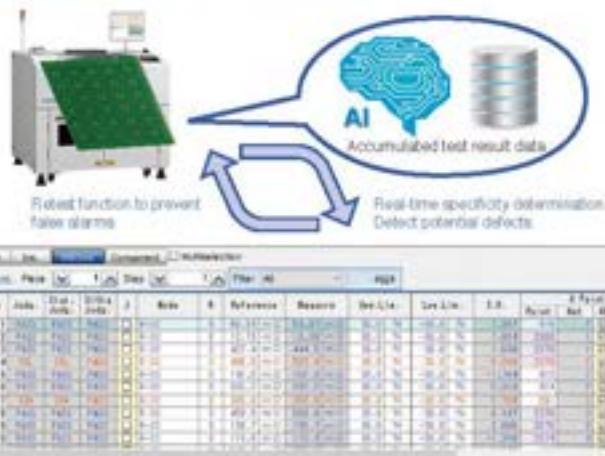

Robust Support for Repair Work Using Simple Operations and Assistive Functionality

FAIL VISUALIZER UA1782



■ Specifications Overview

License content	Install CD, license key (USB), instruction manual *Note: Please purchase hardware such as PC and monitor separately.
Database import	Load UA1780 and U-ART databases
Supported OS	Windows 10 Pro 64-bit
Net highlighting	Display user-specified nets with color highlighting. The user can select whether to display all layers or only top and bottom layers.
Fail list loading with real-time monitoring	Monitor a test result output folder for a testing system at a specified interval and automatically load new test data as it becomes available.

Robust support for repair work through simple operation and assistive functionality

Dedicated visualization software for Hioki electrical testing equipment and data creation systems

- Visualize test results from flying-probe testers
- Pinpoint components and patterns from test result files
- Display the probing positions of test fixtures or test heads for both ICT and bare board testers
- Search for components and nets on device embedded substrates

Model No (Order Code) UA1782 (supports UA1780 database input)
UA1782-01 (supports IPC-D-356 format input)
UA1782-02 (supports CAN & ADR format input)

Populated Board Testing

Electrical Testing Verifies Correct Mounting ----- Populated Board Testing System

FLYING PROBE TESTER FA1240-60



Photo is the FA1240-61

- Quickly complete programs that take into account component height
- Automatic calculation of arm interference (when used with the UA1780)
- Designed to improve probe replaceability, dramatically reducing system downtime caused by probe replacement
- High-speed testing of up to 0.025 sec./step
- Proprietary Hocki lead trace detection reliably detects issues up to and including pseudo-contact
- Provides a superior level of solder quality assurance
- Phase-isolated measurement and guarding functionality are ideal for analog circuits
- Support for active testing (optional feature)
- High-precision probing
- Large testing area of 510 x 460 mm (FA1240-61)
- Standard transport capability
- Automatic alignment function and simple visual test function

CE Compliant model: FA1241-61

Model No. (Order Code) FA1240-61 (for large boards)

FA1240-63 (for medium rack boards)

FA1241-61 (CE compliant model, for large boards)

■ Specifications Overview


	FA1240-61 FA1241-61	FA1240-63
Number of arms	4 (L, ML, MR, R)	
Number of test steps	40,000 (max.)	
Measurement ranges	Resistance: 400 $\mu\Omega$ to 49 M Ω Capacitance: 1 pF to 400 nF Inductance: 1 pH to 100 nH Diode VZ measurement: 0 to 25 V Zener diode VZ measurement: 0 to 25 V, 25 to 80 V (optional feature) Digital transistors: 0 to 25 V Photo couplers: 0 to 25 V Short: 0.4 Ω to 400 k Ω Open: 4 Ω to 40 M Ω DC voltage measurement: 0 to 25 V	
Measurement time	Max. 0.025 sec./step	Max. 0.025 sec./step
Probing precision	Within $\pm 100 \mu\text{m}$ for each arm (X and Y directions)	
Positioning repeatability	Within $\pm 50 \mu\text{m}$ (probing position)	
Inter-probe pitch	Min. 0.15 mm Max. 15 mm (when using 4-terminal probe)	Min. 0.15 mm Max. 0.5 mm (when using 4-terminal probe)
Testable board dimensions	510 mm (20.08 in) W x 460 mm (18.11 in) D	400 mm (15.75 in) W x 330 mm (12.99 in) D
Power supply	200 V AC (single-phase), 50/60 Hz, 6 kVA (FA1241); 230 V AC	200 V AC (single-phase), 50/60 Hz, 5 kVA
Dimensions and mass	1406 mm (55.35 in) H x 1300 mm (51.18 in) W x 1380 mm (54.33 in) D, 1150 kg (40,564.4 oz)	1266 mm (49.64 in) H x 1369 mm (53.90 in) W x 1425 mm (56.10 in) D, 1050 kg (37,637 oz)

FIT-LINE INSPECTION DATA CREATION SYSTEM

UA1780	(software with a four-year license term)
UA1780-01	(software with a one-year license term)
UA1780-11	(one year license renewal)
UA1780-14	(four year license renewal)

Data Creation Software for Populated Board Testing

FIT-LINE INSPECTION DATA CREATION SYSTEM UA1780

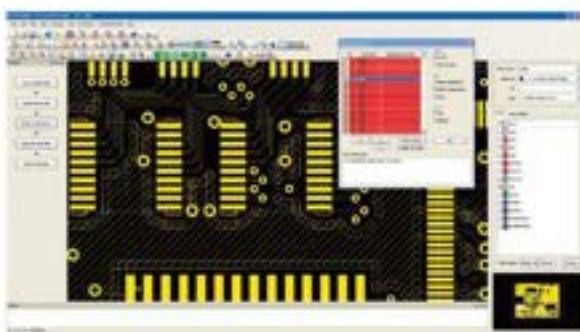

The UA1780 generates data from Gerber data and mounting data while referencing component library information

- No need for camera-based tracing
- No need to visually trace patterns under components
- Easy generation of high-quality test data without boards
- Support for the new FA1240 data format

Thanks to these features, programs can be created with plenty of time in space before the prototyping stage. Anybody can generate high-quality test programs in a short period of time by using set information that has been previously generated from Gerber data and component information libraries. The UA1780 delivers maximum performance when used in conjunction with Hocki's new FA1240-60 flying probe tester.

■ Specifications Overview

Included	Installation CD, license key (USB), instruction manual (> 1 each) *Caution: Computer, monitor, and other hardware not included.
Gerber data input functions	Loading of Gerber files (RS-274X, RS-274D), aperture files, and drill files
Mounting data input functions	Loading of CSV files containing circuit names, layout coordinates, angles of rotation, shape names, and component names Support for operations such as rotation and mirroring, and display of data such as mounting locations
Graphic editing functions	Copying, movement, deletion, and other manipulation of figures
Component library registration functions	Registration of component list displays and component size, height, and pin numbers; registration of test pin pairs, test modes, ratings (thresholds), and upper and lower limit values; duplication of libraries
Test data generation functions	Reverse net generation, test point extraction taking into account components and patterns, automatic movement of test points underneath components, generation of open tests between adjacent pads, etc.
Test point confirmation functions	Display of test points on a graphical screen
Test data output functions	FA1240 files, 1240/1134 files
Data management functions	Saving of databases and management of component libraries

Model No. (Order Code) UA1780 (Software and 4 years license)

UA1780-01 (Software and 1 year license)

UA1780-11 (1 year license)

UA1780-14 (4 years license)

Populated Board Testing

Batch Testing System for Improved Populated Circuit Board Productivity

IN-CIRCUIT TESTER FA1220-02



- Slide-in mechanism simplifies installation and removal of test fixtures, reducing man-hours and workload.
- Extension range of options that reduces setup man-hours and boosts productivity.
- Numerous measurement parameters and detecting defects for a wide variety of inspections.
- Productivity, quality, and safety.
- Data creation support functionality: ATG function.

Model No. (Order Code) FA1220-02

The FA1220-02 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc.

■ FA1220-02 Specifications Overview

Number of test points	Standard: 0 pins (scanner board optional) Max: 2048 pins (expandable in blocks of 128 pins)* <small>* The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.</small>
Number of test steps	Group data: 256 groups Round-robin short/open data: 2048 pins* Macro data: 2048 pins* / 2048 steps (irrespective of pin count) Component data: 10000 steps Charge data: 40 groups Pin contact data: 2048 pins* I _C data: 500 steps (max: 2048 pins/step)* <small>* The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.</small>
Measurement unit	DC voltmeter: 800 µV f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 µA rms to 10 mA rms, 4 ranges HV voltmeter: 25 mV f.s. to 250 V f.s. (Requires EA120 and EA200) HV ammeter: 1.2 µA f.s. to 120 mA f.s. (Requires EA120 and EA200)
Scanner unit	Switch type: analog (Scanner Board EA1201 and EA1202), read relay (Scanner Board EA200) Number of channels: 128 per board Input protection: ±15 V (Scanner Board EA1201 and EA1202), none (Scanner Board EA200)
External I/O	Ethernet (L0/L1) 100Base-TX × 1 (please contact Hücke for communication with external devices)
Control unit	- Measurement control Operating system: Real-time operating system Storage device: SD card (for booting system)
Power supply	Rated supply voltage: 100 to 240 V AC, 50 Hz/60 Hz Maximum power consumption: 1 kW
Dimensions and mass	655 mm (25.79 in) W × 1830 mm (72.21 in) H × 705 mm (27.76 in) D, 310 kg (683.47 lb.)
Included accessories	Instruction Manual × 1, Test lead × 1, Application disc × 1, Positioning screws × 4, Maintenance key (for opening and closing the maintenance door) × 1

Boost Productivity of Populated Circuit Board Testing with the Inline Automatic Testing System

IN-CIRCUIT TESTER FA1220-11



- Installation area about 23% smaller than the previous model. Offers new flexibility for production line layout by saving space.
- Extension range of options that reduces setup man-hours and boosts productivity.
- Numerous measurement parameters and detecting defects for a wide variety of inspections.
- Safeguard people, products, and lines with many safety features.
- Data creation support functionality: ATG function.

Model No. (Order Code) FA1220-11

The FA1220-11 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc.

■ FA1220-11 Specifications Overview

Number of test points	Standard: 0 pins (scanner board optional) Max: 2048 pins (expandable in blocks of 128 pins)* <small>* The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.</small>
Number of test steps	Group data: 256 groups Round-robin short/open data: 2048 pins* Macro data: 2048 pins* / 2048 steps (irrespective of pin count)* Component data: 10000 steps Charge data: 40 groups Pin contact data: 2048 pins* I _C data: 500 steps (max: 2048 pins/step)* <small>* The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.</small>
Measurement unit	DC voltmeter: 800 µV f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 µA rms to 10 mA rms, 4 ranges
Scanner unit	Switch type: analog (EA1201 and EA1202), read relay (EA200) Number of channels: 128 per board Input protection: ±15 V / ±0.5 V (both configurable), EA1201 and EA1202, none (EA200)
External I/O	Ethernet (L0/L1) 100Base-TX × 1 (please contact Hücke for communication with external devices) USB 2.0 × 1
Control unit	- Measurement control Operating system: Real-time operating system Storage device: SD card (for booting system)
Power supply	Rated supply voltage: 100 to 240 V AC, 50 Hz/60 Hz Maximum power consumption: 1 kW Maximum current consumption: 10 A
Dimensions and mass	780 mm (30.71 in) W × 1760 mm (69.29 in) H × 750 mm (29.53 in) D, 390 kg (863.64 lb.)
Included accessories	Instruction Manual × 1, Test lead × 1, Application disc × 1, Positioning screws × 4, Maintenance key (for opening and closing the maintenance door) × 1, Set of transport motor accelerators × 1, Before and after process communication connector set × 2

Populated Board Testing

Embed Electronic Circuit Board Component, Mounting Status, and Function Testing into Existing Equipment

IN-CIRCUIT TESTER FA1220



- Functionality has been consolidated in a single, desktop tower that can be easily embedded in existing equipment
- Extensive function testing
- Electrolytic capacitor and IC reverse insertion detection
- Macro-testing function to increase test efficiency
- Four-terminal low-resistance measurement for stable measurement of low resistance
- High-voltage Zener diode measurement capability up to 100 V (requires options E4204 and E4210)
- Insulation measurement function (requires option E4210)

Model No. (Order Code) FA1220 (Main unit only)

- Data from the legacy IIB1 and IIB2 cannot be converted for use by the IIB8 (FA1220); however, Hioki is unable to supply computers that can run the IIB7 Support Software.
- Data compatibility between the FA1220/FA1221 and legacy products (IIB0-01-03-05-11U-101-01-02-03-05). Although data created for legacy products can be used, such data is not fully compatible with the FA1220/FA1221. It may be necessary to perform stray capacitance acquisition, wiring resistance acquisition, S/D data acquisition, IC data acquisition, and component test debugging. In particular, it may be necessary to reacquire stray capacitance in applications that involve measurement of extremely capacitor values.

■ FA1220 Specifications Overview

Number of test ports	Max. 1024 pins (Can be added in blocks of 128 pins.) Standard: 0 pins (Scanner boards are sold as options.)		
		Round-robin short/open : 1024 pins Component data : Max. 10000 steps Macro data : 1024 pins/1024 steps (regardless of number of pins) IC data : 500 steps (max. 1024 pins/step) Charge data : 40 sets Pin contact data : 1024 pins Group data : 255 groups	
Number of test steps			
Test parameters and measurement ranges	Round-robin short/open : 4 Ω to 400 kΩ (Default: 40 Ω) Macro testing (impedance) : 1 Ω to 10 MΩ Component tests : Possible IC reverse insertion detection : Possible		
Measurement unit	DC voltmeter : 800 μV f.s. to 25 V f.s., 8 ranges DC ammeter : 100 μA f.s. to 250 mA f.s., 9 ranges AC ammeter : 10 μArms f.s. to 10 mA rms f.s., 4 ranges Macro test : Ammeter 10 μ / 100 μ / 1 m / 10 m Arms, 4 ranges		
Scanner unit*2	Software unit : Analog switch (Scanner board E4201, E4202) Number of channels : 128 channels/board (2-H-terminal switchable) Input protection : ±15 V / ±0.5 V (3-wire configurable, Scanner Board E4201/E4202 only)		
External I/O *2	Using I/O Board E4220* : 60 inputs, 56 outputs *1 Hioki plans to update the FA1220/FA1221 to provide functionality for configuring the I/O Board E4205 *2 Sold separately		
Control unit	External computer (sold separately) FA1220: Real-time operating system, LAN for PC connectivity (10 / 100 × 1 port)		
Power supply	100 to 240 V AC (10%), single-phase, 50 Hz / 60 Hz, max. 260 W (with full 1024 pins of scanner boards)		
Dimensions and mass	200 mm (7.87 in) W × 323 mm (12.72 in) H × 296 mm (11.73 in) D, 10 kg (22.7 lb)		
Included accessories	Instruction manual >1, Test leads >1, Power cord >1, Metal fittings >1, Installation CD >1		

SCANNER BOARD E4201 Semiconductor scanner board with guarding; 128 channels per board*2 Cannot be combined with other scanner type boards	SCANNER BOARD E4202 Semiconductor scanner board without guarding; 128 channels per board*2 Cannot be combined with other scanner type boards	SCANNER BOARD E4204 Resistor scanner board, with guarding; 64 channels per board*2 Cannot be combined with other scanner type boards	I/O BOARD E4220 Configurable pin numbers	INTERNAL POWER SUPPLY E4200 Internal 24V power supply for external control use, side outlet to rear of main unit, requires I/O Board E4220	128 DATA COMPOSITION SOFTWARE E1137-05 Check data on a general-purpose computer	SHIELDED SCANNER CABLE E4252 64 pins, single-sided angled type, 2 m (6 ft) length
INSULATION MEASUREMENT FUNCTION E4210 High voltage Zener diode, high voltage measurement, insulation measurement (requires E4204)	PERSONAL COMPUTER UNIT 1913-01 Computer, LCD, monitor, LAN cable, 128 computer application (FA1220 control computer is an option)	UNINTERRUPTIBLE POWER SUPPLY UNIT 1913-02 For computer and LCD	LAN CONNECT UNIT 1913-03 For connecting computer to an external network	I2C TEST UNIT 1900-10 For connecting computer to an external network	CALIBRATION UNIT FOR MEASUREMENT SECTION 1930	CONTROL CABLE E4240 E4205-compatible I/O connector, 64-channel M/F connector, 2 m (6.56 ft) length
ONBOARD PROGRAMMING FUNCTION E4201						RECORDING PAPER 1197 30 mm (1.18 in) × 30 m (9.84 ft), 10 rolls
Model No. (Order Code) FA1220 (Main unit only)						

Multichannel Short/Open Tester that can be Embedded in Your Test Equipment

SHORT-OPEN TESTER FA1221



- Functionality has been consolidated in a single, desktop tower that can be easily embedded in existing equipment
- Specifically designed for short/open testing
- Four-terminal low-resistance measurement for stable measurement of low resistance

Model No. (Order Code) FA1221 (Main unit only)

128 DATA COMPOSITION SOFTWARE E1137-05 Check data on a general-purpose computer	SHIELDED SCANNER CABLE E4252 64 pins, single-sided angled type, 2 m (6 ft) length	CONTROL CABLE E4240 E4205-compatible I/O connector, 64-channel M/F connector, 2 m (6.56 ft) length	RECORDING PAPER 1197 30 mm (1.18 in) × 30 m (9.84 ft), 10 rolls
INTERNAL POWER SUPPLY E4200 Internal 24V power supply for external control use, side outlet to rear of main unit, requires I/O Board E4220	PERSONAL COMPUTER UNIT 1913-01 Computer, LCD, monitor, LAN cable, 128 computer application (FA1220 control computer is an option)	LAN CONNECT UNIT 1913-03 For connecting computer to an external network	UNINTERRUPTIBLE POWER SUPPLY UNIT 1913-02 For computer and LCD

■ FA1221 Specifications Overview

Number of test ports	128 pins (during 4-terminal measurement, up to 32 sets)		
		Round-robin short/open : 128 pins Component data : Max. 10000 steps Macro data : 128 pins/128 steps (regardless of number of pins) IC data : 500 steps (max. 128 pins/step) Charge data : 40 sets Pin contact data : 128 pins Group data : 255 groups	
Test parameters and measurement ranges	Round-robin short/open : 4 Ω to 400 kΩ (Default: 40 Ω) Component tests : Possible		
Component tests	Resistance : 400 μΩ to 40 MΩ Open : 4 Ω to 4 MΩ Short : 400 mΩ to 40 Ω		
Test signals	DC constant voltage : 300 m / 400 mV ; 2 ranges DC constant current : 2 m / 20 mA, 2 ranges		
Measurement unit	DC ammeter : Ammeter 30 μ / 300 μ / 4 m / 40 m Arms, 4 ranges DC voltmeter : 250 m / 2.5 μ / 25 μ / 2.5 m / 25 mA f.s., 6 ranges		
Scanner unit	Analogue software : 128 channels/board (2-H-terminal switchable, no guarding)		
Judgment range	-99.9% to +99.9% or absolute value		
Measurement times	Round-robin short/open : From approx. 0.8 ms per pin Component : From approx. 0.9 ms per step		
Statistics functionality	Defect rate tabulation and graph display test, group, and overall; component test histogram; operating time cumulative and subtotal displays		
External I/O *2	Using I/O Board E4220* : 60 inputs, 56 outputs *1 Hioki plans to update the FA1220/FA1221 to provide functionality for configuring the I/O Board E4205 *2 Sold separately		
Power supply	100 to 240 V AC (10%), single-phase, 50 Hz / 60 Hz, max. 130 W		
Dimensions and mass	200 mm (7.87 in) W × 323 mm (12.72 in) H × 296 mm (11.73 in) D, 10 kg (22.7 lb)		
Included accessories	Instruction manual >1, Test leads >1, Power cord >1, Metal fittings >1, Installation CD >1		

Electrical Measuring Instruments

General Catalog

2024

Model No. (Order Code) Index

Model No. (Order Code) Index

Note: D mark: Discontinued or discontinued scheduled products.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
00A00019	MEASURING LEAD (PEN)	58	For SM7810, DSM-LR010	9451-01	TEMPERATURE PROBE	57	For the BT3554-50 series
00A00021	MEASURING LEAD (PEN)	58	For SM7810, DSM-LR020	9452	CUP TYPE LEAD	-	For the 3209, 3555, 3541, 3543 and similar products
00A00027	MEASURING LEAD (PEN)	58	For SM7810, DSM-LR050	9453	FOUR TERMINAL LEAD	45	For the PM2540 (945-10), BT3554 (100) and similar products
1198	RECORDING PAPER	-	For the 9442 (ST540), 112mm width	9454	ZERO ADJUSTMENT BOARD	45	For the 3209, 3555, 3541 and similar products
3030-10	HITESTER	102		9455	PIN TYPE LEAD	-	For the 3209, 3555, 3541 and similar products
2153	ANALOG INULATION/WITHDRAWING HITESTER	99	Insulation, AC/DC Withdrawing Voltage	9459	BATTERY PACK	81	For the PM3300 series, 3311, 3197, 3405
2157-01	AC GROUNDING HITESTER	61	100-120/200-240 VAC switching	9460	CUP TYPE LEAD WITH TEMPERATURE SENSOR	57	For the BT3554-50 and similar products
2174	ANALOG INULATION/WITHDRAWING HITESTER	66		9461	PIN TYPE LEAD	-	For the 3209, 3555, 3541 and similar products
3244-80	CARD HITESTER	102		9462-10	PIN TYPE LEAD	45	For the PM2540, 3554 and similar products
3245-60	PENCL HITESTER	102		9465-11	PIN TYPE LEAD	45	For the PM3540
3299	POWER SUPPLY	84	For the CT1610 series/CT1710 series/CT1720 series	9465-90	TIP PIN	45	For the PM2540 and similar products (945-10, L2020)
3272	POWER SUPPLY	84	For the CT16100 series/CT2010 series, up to 1	9466	REMOTE CONTROL SWITCH	57	For the BT3554-50 (use with the L2020), 9772, 945-10
3273-50	CLAMP ON PROBE	84	DC to 50 MHz, 500 Arms	9467	LARGE CLIP TYPE LEAD	45	For the PM2540, 3541, 3541/40 and similar products
3274	CLAMP ON PROBE	84	DC to 10MHz, 150 Arms	9478	SHEATH TYPE TEMPERATURE PROBE	41	For the IM5000/IM5100/3447, Pt100
3275	CLAMP ON PROBE	84	DC to 2 MHz, 500 Arms	9500	4 TERMINAL PROBE	48	For the PM2540, 3552-80
3276	CLAMP ON PROBE	84	DC to 100 MHz, 30 Arms	9500-10	4-TERMINAL PROBE	41	For the IM5000/IM5100/3445/25 and similar products
3299-10F	AC CLAMP METER	110	Average rectified	9518-02	GP/IB INTERFACE	54	For the 3157-01
3299-70F	AC CLAMP METER SET	110	3280-10F, CT2020 bundled model	9523-03	RIS-252C INTERFACE	94	For the 3157-01
3297	CLAMP ON AC/DCL HITESTER	108	True RMS	9513	REMOTE CONTROL BOX(SINGLE)	54	For the 3174, 3152/51/52/58 series
3298	CLAMP ON AC/DCL HITESTER	108	Average rectified	9514	REMOTE CONTROL BOX(DUAL)	54	For the 3174, 3152/51/52/58 series
3299-20	CLAMP ON AC/DCL HITESTER	108	True RMS	9515	H.V TEST LEAD	99	For the 3200
3333	POWER HITESTER	70		9521-01	TEMPERATURE SENSOR	-	For the IR455, 3430 series
3333-01	POWER HITESTER	70	Built-in GP-IB	9521-02	TEMPERATURE SENSOR	-	For the 3200 series
3334	AC/DC POWER HITESTER	70		9521-05	TEMPERATURE SENSOR	-	For the IR455, 3430 series
3334-01	AC/DC POWER HITESTER	70	Built-in GP-IB	9521-11	TEMPERATURE SENSOR(9451-01.5m)	-	For the 3200 series
3485-20	VOLTAGE DETECTOR	116		9521-14	TEMPERATURE SENSOR(9451-04.5m)	-	For the 3200 series
3489	ANALOG MO HITESTER	106	Bundled with Standard Test Lead LS787	9521-21	TEMPERATURE SENSOR(9451-01.1m)	-	For the 3200 series
3584-40	C HITESTER	45	Built-in RS-232C interface	9522	CONNECTION CABLE	38	For the BT3552, and similar products
3584-50	C HITESTER	45	Built-in GPIB, RS-232C	9541	CONNECTION CABLE	30	For the LR401-20, 0430-20 and similar products
3584-60	C HITESTER	45	Built-in GPIB, RS-232C	9542	LAN CABLE	25	For the Memory HiCoder, LR401, and similar products
3586-10	C-METER	44	Measurement frequency: 1 MHz and 1 MHz	9557-10	CLAMP ON LEAK SENSOR	95	For the PM2000S, PM2001, PM2002, and similar products
3581	BATTERY HITESTER	55		9580	CLAMP ON SENSOR	95	For the PM2000S, PM2001, PM2002 and similar products
3581-01	BATTERY HITESTER	55	Built-in GP-IB interface	9581	CLAMP ON SENSOR	98	For the PM2000S, PM2001, PM2002 and similar products
3585-20	LIN CABLE HITESTER	94	English model	9586	10 TROPE	25	For the Memory HiCoder series
3800	HIGH VOLTAGE SCANNER	69	For the ST153 and similar products	9586	100 TROPE	25	For the Memory HiCoder series
3868	ANALOG UNIT	19	For MR6000, MR6047A, MR6027, and similar products	9589	CLAMP ON SENSOR	93	For the PM2000S, PM2001, PM2002 and similar products
8867	TEMP. UNIT	19	For MR6001, MR6047A, MR6027, and similar products	9675	CLAMP ON LEAK SENSOR	95	For the PM2000S, PM2001, PM2002 and similar products
8868	HIGH RESOLUTION UNIT	19	For MR6003, MR6047A, MR6027, and similar products	9677	SMD TEST FIXTURE	41	For the IM507-71 and similar products
8879	FREQ. UNIT	19	For MR6003, MR6047A, MR6027, and similar products	9683	CONNECTION CABLE	75	For the PM3300
8871	CURRENT UNIT	19	For MR6003, MR6047A, MR6027, and similar products	9686-01	TERMINATOR(01.5)	94	For the 3205-20
8872	DCRMS UNIT	19	For MR6002, MR6047A, MR6027, and similar products	9686-02	TERMINATOR(06-10)	94	For the 3205-20
8873	LOGIC UNIT	19	For MR6002, MR6047A, MR6027, and similar products	9686-03	TERMINATOR(011-15)	94	For the 3205-20
8875-50	CLAMP ON PROBE	82	BNC output terminal	9690-04	TERMINATOR(016-20)	94	For the 3205-20
8817	HIGH VOLTAGE PROBE	102	For the 3200-10	9694	CLAMP ON SENSOR	98	For the PM2000S, PM2001, PM2002 and similar products
8818-50	CLAMP ON PROBE	82	Wide band, BNC output terminal	9695-02	CLAMP ON SENSOR	98	For the PM2000S, PM2001, PM2002 and similar products
8853	EARTH NETS	115	For the F16001, F12151	9695-03	CLAMP ON SENSOR	98	For the PM2000S, PM2001, PM2002 and similar products
8132-50	CLAMP ON PROBE	82	BNC output terminal	9696	SMD TEST FIXTURE	41	For the IM507-71 and similar products
8140-10	4-TERMINAL PROBE	45	For the 3111200-102 and similar products models	9704	CONVERSION ADAPTER	20	For the MR6004(MF6075), U6050(LP635), PR450
8140-10	4-TERMINAL PROBE	45	For the IM507-05/07/08/09/10 and similar products	9713-01	CAN CABLE	18	512 MB
8151-02	GPIB CONNECTOR CABLE	71	For the PR3030S and similar products	9728	PC CARD 512M	16	1 GB
8185	CONNECTION CORD	25	For the Memory HiCoder and similar products	9729	PC CARD 1G	-	For the IR455, 3455
8186	CONNECTION CORD	25	For the Memory HiCoder and similar products	9750-01	TEST LEAD	-	For the IR455, 3455
8188	INPUT CORD	62	For the 557012, 70110	9750-02	TEST LEAD	-	For the IR455, 3455
8194	TEMPERATURE PROBE	82	For the 557012, 70111	9751-01	ALLIGATOR CLIP	-	For the IR455, 3455
8195	ENCLOSURE PROBE	85	For the ST1554-02 series, 31540105	9751-02	ALLIGATOR CLIP	-	For the IR455, 3455
8199	CONVERSION ADAPTER	25	For Memory HiCoder, the 3205 and similar products	9751-03	ALLIGATOR CLIP	-	For the IR455, 3455
8209	TEST LEAD HOLDER	108	For the 3200-10 and similar products	9758	EXTENSION CABLE	96	For the FT3475-52/51
8219	CONNECTION CABLE	10	For the 9805-02/03	9759	OUTPUT CABLE	96	For the FT3475-52/51
8221	RECORDING PAPER	25	For the 8855-01, 8855-02/05, 8852, 10 rolls	9770	PIN TYPE LEAD	54	For the ST2000, ST3000, 200/300/400 and similar products
8229	RECORDING PAPER	25	For the 8826, 8825, 6 rolls/lot	9770-00	TIP PIN	54	For the 8770, L2102, replacement tip
8229-01	RECORDING PAPER(PERFORATED)	25	For the 8826, 8825, (Perforated) 6 rolls/lot	9771	PIN TYPE LEAD	54	For the ST2000, ST3000, 200/300/400 and similar products
8231	RECORDING PAPER	25	From MR6001, MR6030/01, 02/05/06/07/08/09/10/11/12	9771-00	TIP PIN	54	For the 8771, L2103, replacement tip
8232	RECORDING PAPER	25	For the 8800-10, 8800-10, 80mm width	9772	PIN TYPE LEAD	54	For the PR3030, 3300
8235	RECORDING PAPER	25	For the 8820-10, 8820-10, 60mm width (Circuit-resistant)	9772-00	TIP PIN	46	For the 9772, PM2540(9454), L2100(9735-00/02)
8236-01	RECORDING PAPER	25	For the 8820-10, 8820-10, 60mm width (Circuit-resistant)	9780	BATTERY PACK	20	For the MR6010-20, LR401-20, 0430-20 series
8248	POWER CORD	24	For the 8822 to 9807 coiled	9782	CARRYING CASE	20	For the MR6010-20, LR401-20, 0430-20, 0571-02
8249	CARRYING CASE	94	For the 8805-20	9783	CARRYING CASE	21	For the MR6047 series
8251	TEST FIXTURE	45	For the LCR meter	9784	DC POWER UNIT	21	For the MR6047 series
8251-10	TEST FIXTURE	41	For the IM507-05/07/08/09/10 and similar products	9790-02	GRABBER CLIP	25	For the LR70
8252	TEST FIXTURE	41	For the LCR meter	9790-03	CONTACT PIN	25	For the LR70
8253	TEST FIXTURE	41	For the LCR meter	9794	CARRYING CASE	75	For the PR3030, 3300
8257	Safety TEST DATA MANAGEMENT SOFTWARE	69	For ST1540/01, 51541, 5158 and similar products	9804	MAGNETIC ADAPTER	96	For the CR424/425/425/50, and similar products
8258-10	DC BIAS VOLTAGE UNIT	41	For the IM507-05/07/08/09/10 and similar products	9804-01	MAGNETIC ADAPTER	80	For the LR401 series/PR3030 series and similar products, ad. #1
8272-05	CLAMP ON SENSOR	89	For the 20200-A AC, ME 15W terminal	9804-02	MAGNETIC ADAPTER	80	For the LR401 series/PR3030 series and similar products, ad. #1
8298	CURRENT PROBE	64	For the ST157-01	9809	PROTECTION SHEET	20	For the MR6070-20/08/09/10, LR401-20, 0430-20
8297	CURRENT APPLY PROBE	64	For the ST157-01	9812	SOFT CASE	20	For the MR6070-20/08/09/10, LR401-20, 0430-20
8299	SWITCHED PROBE	67	For the ST15520 and similar products	9830	PC CARD 2G	19	2 GB
8308	CONVERSION CABLE	88	To connect HDM/RL20/10 pin connector to the ST1540/01	BT3554-50	BATTERY TESTER	57	Pin Type Lead not included
8309-01	LOGIC PROBE	25	For the Memory HiCoder, miniature-terminal type	BT3554-51	BATTERY TESTER	57	Bundled with Pin Type Lead L2329
8322	DIFFERENTIAL PROBE	24	For the Memory HiCoder series	BT3554-52	BATTERY TESTER	57	BT3554-51 + Wireless Adapter Z3210
8337	LOGIC PROBE	25	For the MR6047 series, 8800-series, 8855	BT3554-91	BATTERY TESTER	57	BT3554-52 + Wireless Adapter Z3210 (Recommended)
D 8328	POWER CORD	-	For the 8822	BT3558-01	BATTERY TESTER	58	Compact pack up to 60V
8333	LAN COMMUNICATOR	27	For the MR6047 series, MR6047-01 series, 8800	BT3558-02	BATTERY TESTER	58	Medium-size pack up to 100V
8335	WAVE PROCESSOR	27	For the Memory HiCoder series	BT3562-01	BATTERY TESTER	58	Built in GP-IB and analog output
8355	CARRYING CASE	88	For the 8823-10, 8820 series, and similar products	BT3563A	BATTERY TESTER	54	Large pack up to 300V
8390	CARRYING CASE	82	For the 557012, 70111	BT3563-01	BATTERY TESTER	54	Built in GP-IB and analog output
8390	CARRYING CASE	102	For the 8820-10	BT3564	BATTERY TESTER	54	
8398	CARRYING CASE	108	For the 8820/00, 8820-10/20	BT4580	BATTERY IMPEDANCE METER	56	
8415-15	AC ADAPTER	24	For the 8822, 8817 and similar products	BT5525	BATTERY INSULATION TESTER	67	
8444	CONNECTION CABLE	-	For the Power 0442	C0196	CARRYING CASE	115	For the FT3031, FT3151 and similar products
8445-02	AC ADAPTER	81	For the CM7200 and similar products, 100m to 240V AC				
8446	CONNECTION CABLE	-	For the Power 0442				
8447	BATTERY PACK	-	For the 880700, 8820 series				
8451	TEMPERATURE PROBE	57	For the BT3554-50 series				

Model No. (Order Code) Index

Note: D-mark = Discontinued or discontinued scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
C1000	CARRYING CASE	101	For the DT4220 series	CT9557	SENSOR UNIT	88	For the CT8841A, etc., ME15W connector
C1001	CARRYING CASE	96	For the DT4250 series, CT4210 series, FT3040	CT9667-01	AC FLEXIBLE CURRENT SENSOR	92	Φ100 mm (3.94 in)
C1002	CARRYING CASE	96	For the DT4260 series, DT4265 series, DT4270 series, FT3040	CT9667-02	AC FLEXIBLE CURRENT SENSOR	92	Φ150 mm (7.09 in)
C1003	CARRYING CASE	101	For the CM4270 series, and similar products	CT9667-03	AC FLEXIBLE CURRENT SENSOR	92	Φ254 mm (10.00 in)
C1004	CARRYING CASE	102	For the 3044-00	CT9648	CLAMP ON SENSOR	114	For the FT8041, for detection
C1005	CARRYING CASE	110	For the CT6260, CM3201/3205-10F and similar products	CT19000	CONVERSION CABLE	71	For the CT8841, PW8001 and similar products
C1006	CARRYING CASE	95	For the FT4210	CT19001	CONVERSION CABLE	85	For the CT8841A and similar products
C1007	CARRYING CASE	95	Bag type	CT19002	EXTENSION CABLE	85	For the CT8841A and similar products
C1008	CARRYING CASE	114	For the FT8041	CT19004	CONNECTION CABLE	71	For the CT8850, PW8001/PW8001/PW8000
C1009	CARRYING CASE	114	For the FT8041	CT19005	CONVERSION CABLE	75	For the PW8000 and similar products
C1010	CARRYING CASE	106	For the IR5050 and IR5051, IR505	DMT275-01	PRECISION DC VOLTMETER	61	
C1011	CARRYING CASE	90	For the CT7800 series, T700 series	DMT275-02	PRECISION DC VOLTMETER	61	Built-in GP-IB
C1012	CARRYING CASE	90	For the CT7800 series, T700 series	DMT275-03	PRECISION DC VOLTMETER	61	Built-in RS-232C
C1013	CARRYING CASE	80	For the PQ5190, PQ5100, PW5100	DMT276-01	PRECISION DC VOLTMETER	61	
C1014	CARRYING CASE	19	For the MP9880	DMT276-02	PRECISION DC VOLTMETER	61	Built-in GP-IB
C1015	CARRYING CASE	20	For the MP9875	DMT276-03	PRECISION DC VOLTMETER	61	Built-in RS-232C
C1016	CARRYING CASE	81	For the PW3065/PW3070 timer	DM98104P	INTERLOCK CABLE	—	For the SM7110, SM7120, DM-81046542
C1017	CARRYING CASE	45	For the PW3040	DT4221	DIGITAL MULTIMETER	121	V measurement only, for electrical work
C1018	CARRYING CASE	51	For the LR8410	DT4222	DIGITAL MULTIMETER	121	With CR measurement, for general use
C1019	CARRYING CASE	61	For PW3065	DT4223	DIGITAL MULTIMETER	121	With resistance measurement, for electrical work
C1020	CARRYING CASE	80	For the PQ5100 and similar products	DT4224	DIGITAL MULTIMETER	121	With CR measurement, for general use
C1021	CARRYING CASE	19	For the MR6500	DT4252	DIGITAL MULTIMETER	100	10 A direct input
D-C1011	CARRYING CASE	—	For the SP9000	DT4253	DIGITAL MULTIMETER	100	With-aDC, temperature
C1012	CARRYING CASE	23	For the LR8450	DT4255	DIGITAL MULTIMETER	100	With-trend measurement terminals
C1013	CARRYING CASE	23	For the SP7000 series	DT4258	DIGITAL MULTIMETER	100	Multifunctional model, with 10 A direct input
C1014	CARRYING CASE	57	For the DT5554-50 series	DT4261	DIGITAL MULTIMETER	96	Multifunctional, for on-site maintenance
CMD281	AC CLAMP METER	111	Average rectified	DT4261-00	DIGITAL MULTIMETER/WIRELESS ADAPTER	99	Bundled with the Wireless Adapter Z3210
CMD286-50	AC CLAMP POWER METER	82	Wireless Adapter Z3210 not included	DT4261	DIGITAL MULTIMETER	98	Dried and current clamp input terminals
CMD289-90	AC CLAMP POWER METER/WIRELESS ADAPTER	92	Bundled with the Wireless Adapter Z3210	DT4262	DIGITAL MULTIMETER	98	10 A direct input
CMD290	AC CLAMP METER	110	True RMS	DT4900-01	COMMUNICATION PACKAGE (USB)	98	For the DT4200 series, DT4250 series
CMD291	AC CLAMP METER	111	True RMS	DT4910	THERMOCOUPLE(S)	98	For the DT4200 series, DT4250, and similar products
CMA001	AC LEAKAGE CLAMP METER	112	Wireless Adapter Z3210 not included	DT4911	TEST LEAD	121	For the DT4200 series
CMA001-90	AC LEAKAGE CLAMP/WIRELESS ADAPTER	112	Bundled with the Wireless Adapter Z3210	FR-PD	INK PEN	—	For the EPY-1FA
CMA002	AC LEAKAGE CLAMP METER	112	Wireless Adapter Z3210 not included	FT3151	ANALOG EARTH TESTER	115	
CMA002-90	AC LEAKAGE CLAMP/WIRELESS ADAPTER	112	Bundled with the Wireless Adapter Z3210	FT3424	LUX METER	97	
CMA003	AC LEAKAGE CLAMP METER	112	Wireless Adapter Z3210 not included	FT3425	MAGNETIC FIELD METER	97	Built-in Bluetooth® wireless technology
CMA003-90	AC LEAKAGE CLAMP/WIRELESS ADAPTER	112	Bundled with the Wireless Adapter Z3210	FT3450-51	MAGNETIC FIELD METER	98	100 cm²/Sensor bundled
CMA141-50	AC CLAMP METER	115	Wireless Adapter Z3210 not included	FT3450-52	MAGNETIC FIELD METER	98	100 cm²/Sensor, 3 cm²/Sensor bundled
CMA141-90	AC CLAMP METER/WIRELESS ADAPTER	116	Bundled with the Wireless Adapter Z3210	FT3700-20	INFRARED THERMOMETER	95	Long-focus type
CMA371-50	AC/DC CLAMP METER	101	Wireless Adapter Z3210 not included	FT3711-20	INFRARED THERMOMETER	95	Long-focus, precise field type
CMA371-90	AC/DC CLAMP METER/WIRELESS ADAPTER	101	Bundled with the Wireless Adapter Z3210	FT4291	BYPASS DIODE TESTER	95	Built-in Bluetooth® wireless technology
CMA373-50	AC/DC CLAMP METER	107	Wireless Adapter Z3210 not included	FT601-50	EARTH TESTER	115	Wireless Adapter Z3210 not included
CMA373-90	AC/DC CLAMP METER/WIRELESS ADAPTER	107	Bundled with the Wireless Adapter Z3210	FT601-99	EARTH TESTER/WIRELESS ADAPTER	115	Bundled with the Wireless Adapter Z3210
CMA373-91	AC/DC CLAMP METER SET	107	Bundled with the DC High Voltage Probe F2000	FT6041	EARTH TESTER	114	
CMA373-92	AC/DC CLAMP METER SET	107	Bundled with the Wireless Adapter Z3210	FT6041-00	EARTH TESTER	114	Bundled with the FT8047 and CT9648
CMA375-50	AC/DC CLAMP METER	107	Bundled with the Wireless Adapter Z3210	FT6280-50	CLAMP ON EARTH TESTER	113	Wireless Adapter Z3210 not included
CMA375-90	AC/DC CLAMP METER/WIRELESS ADAPTER	107	Bundled with the Wireless Adapter Z3210	FT6280-90	CLAMP ON EARTH TESTER/WIRELESS ADAPTER	113	Bundled with the Wireless Adapter Z3210
CMA375-91	AC/DC CLAMP METER SET	107	Bundled with the DC High Voltage Probe F2000	FT9847	SIGNAL INDUCTION CLAMP	114	For the FT8041, for signal induction
CMA375-92	AC/DC CLAMP METER SET	107	Bundled with the DC High Voltage Probe F2000	IM0523	LOR METER	45	
CM7280	DISPLAY UNIT	91	For the CT7800 series	IM0523A	LOR METER	45	
CM7291	DISPLAY UNIT	91	For the CT7800 series, without built-in Bluetooth® wireless technology	IM0533	LOR METER	44	
CT6280	AC FLEXIBLE CURRENT SENSOR	111	For the CM3091/95, 3200-10F and similar products	IM0533-01	LOR METER	44	Advanced function model
CT6500	CLAMP ON SENSOR	29	For the LR8510, LR8520	IM0536	LOR METER	45	
CT6700	CURRENT PROBE	85	From 1mA, 50MHz bandwidth	IM0536-01	LOR METER	45	Special order products up to 10 MHz
CT6701	CURRENT PROBE	85	From 1mA, 120MHz bandwidth	IM0570	IMPEDANCE ANALYZER	42	
CT6710	CURRENT PROBE	85	From 200A, 50MHz bandwidth	IM0580	CHEMICAL IMPEDANCE ANALYZER	41	For electrochemical components
CT6711	CURRENT PROBE	85	From 200A, 120MHz bandwidth	IM0584-1	IMPEDANCE ANALYZER	40	Connection cable 1 m is bundled
CT6830	AC/DC CURRENT SENSOR	96	2 A AC/DC, ME15W terminal	IM0584-2	IMPEDANCE ANALYZER	40	Connection cable 2 m is bundled
CT6831	AC/DC CURRENT SENSOR	88	20 A AC/DC, ME15W terminal	IM0581-01	IMPEDANCE ANALYZER	40	Connection cable 1 m is bundled
CT6841A	AC/DC CURRENT PROBE	88	20 A AC/DC, ME15W terminal	IM0581-02	IMPEDANCE ANALYZER	40	Connection cable 2 m is bundled
CT6843A	AC/DC CURRENT PROBE	88	200 A AC/DC, ME15W terminal	IM0583-01	IMPEDANCE ANALYZER	39	Connection cable 1 m is bundled
CT6844A	AC/DC CURRENT PROBE	87	500 A AC/DC, ME15W terminal	IM0583-02	IMPEDANCE ANALYZER	39	Connection cable 2 m is bundled
CT6845A	AC/DC CURRENT PROBE	87	5000 A AC/DC, ME15W terminal	IM0585-01	IMPEDANCE ANALYZER	39	Connection cable 1 m is bundled
CT6846A	AC/DC CURRENT PROBE	87	1000 A AC/DC, ME15W terminal	IM0585-02	IMPEDANCE ANALYZER	39	Connection cable 2 m is bundled
CT6862	AC/DC CURRENT PROBE	88	50 A AC/DC, ME15W terminal	IM0587-01	IMPEDANCE ANALYZER	38	Connection cable 1 m is bundled
CT6863	AC/DC CURRENT SENSOR	88	200 A AC/DC, ME15W terminal	IM0587-02	IMPEDANCE ANALYZER	38	Connection cable 2 m is bundled
CT6872	AC/DC CURRENT SENSOR	88	500 A AC/DC, ME15W terminal, 2 m (0.211 ft) cable length	IM6000	EQUIVALENT CIRCUIT ANALYSIS SOFTWARE	42	Factory option software for the IM7570
CT6872-01	AC/DC CURRENT SENSOR	88	500 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length	IM6100	SMD TEST FIXTURE	41	For the IM536, and similar products
CT6873	AC/DC CURRENT SENSOR	88	200 A AC/DC, ME15W terminal, 2 m (0.211 ft) cable length	IM6100	SMD TEST FIXTURE	41	For the IM537, and similar products
CT6873-01	AC/DC CURRENT SENSOR	88	250 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length	IM6200	TEST FIXTURE STAND	36	For the IM750 series
CT6875A	AC/DC CURRENT SENSOR	85	500 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length	IM6201	SMD TEST FIXTURE	36	For the IM750 series
CT6875A-1	AC/DC CURRENT SENSOR	85	500 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length	IM6202	TEST FIXTURE	36	For the IM750 series
CT6876A	AC/DC CURRENT SENSOR	85	1000 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length	IM6501	CONTACT TIPS	41	To replace the tip on the L201
CT6876A-1	AC/DC CURRENT SENSOR	85	1000 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length	IM6902	CONTACT TIPS	41	To replace the tip on the L201
CT6877A	AC/DC CURRENT SENSOR	85	2000 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length	IM6905	CALIBRATION KIT	36	For the IM750 series
CT6877	AC/DC CURRENT SENSOR	85	2000 A AC/DC, ME15W terminal, 10 m (32.81 ft) cable length	IM6906	ADAPTER (3.5mm/3mm)	36	For the IM750 series
CT6904A	AC/DC CURRENT SENSOR	85	500 A AC/DC, ME15W terminal, 3 m (9.84 ft) cable length	IM6912-00	ANALOG MO HIGHLIGHTER	125	500 V/100 MΩ, Test Lead L9707 bundled
CT6904A-1	AC/DC CURRENT SENSOR	85	Speaker protection 6.0Ω, ME15W terminal, 10 m (32.81 ft) cable length	IM6912-20	ANALOG MO HIGHLIGHTER	125	500 V/1000 MΩ, Test Lead L9707 bundled
CT6904A-2	AC/DC CURRENT SENSOR	85	Speaker protection 6.0Ω, ME15W terminal, 20 ft (6.09 m) cable length	IM6912-30	ANALOG MO HIGHLIGHTER	125	1000 V/2000 MΩ, Test Lead L9707 bundled
CT6904A-3	AC/DC CURRENT SENSOR	85	Speaker protection 6.0Ω, ME15W terminal, 20 ft (6.09 m) cable length	IM6953-10	INSULATION TESTER	124	Bundled with Test Lead L9707
CT7044	AC FLEXIBLE CURRENT SENSOR	91	6000 A, φ100 mm (3.94 in)	IM6956-20	INSULATION TESTER	124	Economic model
CT7045	AC FLEXIBLE CURRENT SENSOR	91	6000 A, φ150 mm (5.91 in)	IM6956-21	INSULATION TESTER	124	Economic model, Not CE marked
CT7046	AC FLEXIBLE CURRENT SENSOR	91	6000 A, φ254 mm (10.00 in)	IM6957-50	INSULATION TESTER	125	Wireless Adapter Z3210 not included
CT7116	AC LEAKAGE CURRENT SENSOR	98	For the PQ5100, 60 A, PL14 terminal	IM6957-90	INSULATION TESTER/WIRELESS ADAPTER	125	Bundled with the Wireless Adapter Z3210
CT7128	AC CURRENT SENSOR	95	For the PQ5100, 60 A, PL14 terminal	IM6958	INSULATION TESTER	125	Wireless Adapter Z3210 not included
CT7131	AC CURRENT SENSOR	95	For the PQ5100, 100 A, PL14 terminal	IM6959	HIGH VOLTAGE INSULATION TESTER	125	
CT7136	AC CURRENT SENSOR	95	For the PQ5100, 600 A, PL14 terminal	IM6951	HIGH VOLTAGE INSULATION TESTER	125	For solar PV system
CT7801	AC/DC CURRENT SENSOR	90	100 A AC/DC, φ63 mm (1.30 in)	IM6954-90	HIGH VOLTAGE INSULATION TESTER	125	For solar PV system, bundled with the Z3210
CT7836	AC/DC CURRENT SENSOR	90	600 A AC/DC, φ63 mm (1.30 in)	L0220-01	EXTENSION CABLE	120	
CT7842	AC/DC CURRENT SENSOR	90	2000 A AC/DC, φ63 mm (2.17 in)	L0220-02	EXTENSION CABLE	120	
CT7731	AC/DC AUTO-ZERO CURRENT SENSOR	90	100 A AC/DC, φ63 mm (1.30 in)	L0220-03	EXTENSION CABLE	120	
CT7738	AC/DC AUTO-ZERO CURRENT SENSOR	90	900 A AC/DC, φ63 mm (1.30 in)	L0220-04	EXTENSION CABLE	120	
CT7742	AC/DC AUTO-ZERO CURRENT SENSOR	90	2000 A AC/DC, φ63 mm (2.17 in)	L0220-05	EXTENSION CABLE	120	
CT7742	AC/DC CURRENT SENSOR	89	2 A AC/DC	L0220-06	EXTENSION CABLE	120	
CT7822	AC/DC CURRENT SENSOR	89	20 A AC/DC	L0220-07	EXTENSION CABLE	120	
CT9555	SENSOR UNIT	89	For the CT6841A, etc., ME15W connector	L1000	VOLTAGE CORD	71	For the PW8001, PW8001, PQ5100
CT9556	SENSOR UNIT	89	For the CT6841A, etc., ME15W connector	L1000-05	VOLTAGE CORD	80	For the PQ5100

Model No. (Order Code) Index

Note: D mark: Discontinued or discontinued scheduled model.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
L1002	USB CABLE(A-B)	52	For the DM7216 and similar products	L9845-33	MEASUREMENT CABLE	104	For the FT8041
L1010	CONNECTION CABLE	35	For the LR8512	L9845-52	MEASUREMENT CABLE	104	For the FT8041
L1011	CONVERSION CABLE	24	For the P9000 and similar products	L9848	EARTH NET MODULE	104	For the FT8041
L1011-10	CONVERSION CABLE	24	For the P9000 and similar products	L9850-01	TEST LEAD	104	For the IR5050 and IR5051, red, 5 m (16.4 ft) length
L1012	POWER CABLE	34	Unprocessed ends, 2 m (6.6 ft) length	L9850-02	TEST LEAD	104	For the IR5050 and IR5051, black, 3 m (9.8 ft) length
L1021-01	PATCH CORD	71	For the PR6360 and similar products	L9850-03	TEST LEAD	104	For the IR5050 and IR5051, blue, 3 m (9.8 ft) length
L1021-02	PATCH CORD	71	For the PR6360 and similar products	L9850-11	TEST LEAD	104	For the IR5050 and IR5051, red, 10 m (32.8 ft) length
L1025	VOLTAGE CORD	71	For the PR6051	L9850-12	TEST LEAD	104	For the IR5050 and IR5051, black, 10 m (32.8 ft) length
L1050-01	VOLTAGE CORD	74	1.6 m (5.2 ft) length	L9850-13	TEST LEAD	104	For the IR5050 and IR5051, blue, 10 m (32.8 ft) length
L1050-03	VOLTAGE CORD	74	3 m (9.8 ft) length	L9851-01	ALLIGATOR CLIP	104	For the L9850, red
L2000	4-TERMINAL PROBE	41	For the RM5403/RM5478, RM50610, RM50506	L9851-02	ALLIGATOR CLIP	104	For the L9850, black
L2001	PINCHER PROBE	41	For the RM5425, and similar products	L9851-03	ALLIGATOR CLIP	104	For the L9850, blue
L2002	CLIP TYPE PROBE	56	For the BT4560, 1.5 m (4.92 ft) length	L9862	TEST PIN SET	104	Red and black, for L9850
L2003	PIN TYPE PROBE	56	For the BT4560, 1.5 m (4.92 ft) length	L9910	CONVERSION CABLE	80	For the PQ2030
L2004	CONNECTION CABLE	52	SW1001 and similar products	L98001	HUMIDITY LOGGER	37	Temperature/Humidity each 1ch
L2009	PIN TYPE LEAD	57	For the BT3554-50	L98011	TEMPERATURE LOGGER	37	Temperature 1ch
L2009	PIN TYPE LEAD	48	For the BT3552, BT3550, and RM545	L98031	INSTRUMENTATION LOGGER	36	+mV DC, 1ch
L2001	CLIP TYPE LEAD	46	For the RM5544, RM5545 series	L98041	VOLTAGE LOGGER (50V)	36	+50mV DC
L2002	PIN TYPE LEAD	48	For the RM5544, RM5545 series	L98042	VOLTAGE LOGGER (5V)	36	+5V DC
L2003	PIN TYPE LEAD	48	For the RM5544, RM5545 series	L98043	VOLTAGE LOGGER (50V)	36	+50V DC
L2004	4-TERMINAL LEAD	48	For the RM5544, RM5545 series	L98051	CLAMP LOGGER	36	3ch, clamp sensor is sold separately
L2005	LED COMPARATOR ATTACHMENT	48	For the RM5544, RM5545 series, RM546	L98091	COMMUNICATION ADAPTER	35	For the LP5000 series
L2007	CLIP TYPE LEADS	45	For the RM2043, 204180, 204190 and similar products	L98092-20	DATA COLLECTOR	35	For the LR6000 series
L2008	CONNECTION CABLE	52	SW1001 and similar products	L98101	DATA LOGGER	34	Main unit only, standard model
L2010	PIN TYPE LEAD	58	For the BT3552-01, BT3550-01, BT3548	L98102	DATA LOGGER	34	Main unit only, advanced model
L2010	CLIP TYPE LEAD	67	For the BT3552	L98410-20	WIRELESS LOGGING STATION	31	English model, main unit only
L2031	CLIP TYPE LEAD	67	For the BT3552	L98410-30	WIRELESS LOGGING STATION	-	Chinese model, main unit only
L2032	UNTERMINATED LEAD L2032	67	For the BT3552	L98431-20	MEMORY HLOGGER	34	10-ch, English model
L2033	UNTERMINATED LEAD L2032	67	For the BT3552	L98431-30	MEMORY HLOGGER	-	10-ch, Chinese model
L2039	TEST LEAD	65	For the ST3540, ST5541, MR8000	L98432-20	HEAT FLOW LOGGER	30	10-ch, English model
L2220	CONNECTOR	58	For the SM7110	L98432-30	HEAT FLOW LOGGER	-	10-ch, Chinese model
L2221	CONNECTOR	58	For the SM7100	L98450	MEMORY HLOGGER	32	Standard model (Plug-in model), main unit only
L2230	PIN TYPE LEAD (RED)	58	For the SM7110 and similar products	L98453-01	MEMORY HLOGGER	32	Wireless LAN equipped model, main unit only
L2231	PIN TYPE LEAD (BLACK)	58	For the SM7110 and similar products	L98510	WIRELESS VOLTAGE/TEMP UNIT	31	For the LR6410
L2232	CLIP TYPE LEAD (RED)	58	For the SM7110 and similar products	L98511	WIRELESS UNIVERSAL UNIT	31	For the LR6410
L2233	CLIP TYPE LEAD (BLACK)	58	For the SM7110 and similar products	L98512	WIRELESS PULSE LOGGER	38	2 ch
L2234	OPEN LEAD (RED)	58	For the SM7110 and similar products	L98513	WIRELESS CLAMP LOGGER	38	2 ch, sensor is sold separately
L2235	OPEN LEAD (BLACK)	58	For the SM7110 and similar products	L98514	WIRELESS HUMIDITY LOGGER	38	2 ch, sensor is sold separately
L2250	CLIP TYPE LEAD	68	For the ST403A, ST402B	L98515	WIRELESS VOLTAGE/TEMP/LOGGER	38	2 ch, sensor is sold separately
L2252	UNPROCESSED LEAD CABLE	68	For the ST403A	L98520	WIRELESS FUNGAL LOGGER	38	Humidity sensor is sold separately
L4030	CONNECTION CABLE SET	98	For the DT4250 series, DT4250 series	L98530	WIRELESS VOLTAGE/TEMP/UNIT	38	For the LR6450-01
L4031	EXTENSION CABLE SET	25	For the L4030L, 4R40	L98531	WIRELESS UNIVERSAL UNIT	38	For the LR6450-01
L4032	TEST PIN SET	68	For the L4030L, 4R40	L98532	WIRELESS VOLTAGE/TEMP/UNIT	38	For the LR6450-01
L4033	CONTACT PIN SET	68	For the L4030L, DT4010, DT4020 series, DT4250 series	L98533	WIRELESS HIGH SPEED VOLTAGE UNIT	38	For the LR6450-01
L4034	SMALL ALLIGATOR CLIP SET	68	For the L4030L, L4030, DT4010, DT4020 series, DT4250 series	L98534	WIRELESS STRAIN UNIT	38	For the LR6450-01
L4035	ALLIGATOR CLIP SET	25	For the L4030L, 4R40 (DT4250 series, DT4250 series)	L98535	WIRELESS CAN UNIT	38	For the LR6450-01
L4036	BUS BAR CLIP SET	68	For the L4030L, 4R40 (DT4250 series, DT4250 series)	L98536	WIRELESS CURRENT MODULE	38	For the LR6450-01
L4037	MAGNETIC ADAPTER SET	68	For the L4030L, 4R40 (DT4250 series, DT4250 series)	L98551	HUMIDITY SENSOR	37	For the LR6001
L4038	TEST PIN SET	68	For the L4030L (DT4250 series, DT4250 series)	L98552	HUMIDITY SENSOR	37	For the LR6001
L4039	BREAKER PIN SET	68	For the L4030L (DT4250 series, DT4250 series)	L98553	HUMIDITY SENSOR	37	For the LR6001
L4040	CONNECTION CABLE SET	25	For the MR8000	L98601	TEMPERATURE SENSOR	37	For the LR6001
L4043	CONNECTION CABLE SET	99	For the P2000	L98602	TEMPERATURE SENSOR	37	For the LR6001
L6000	OPTICAL CONNECTION CABLE	71	For the PW80001, PW8001	L98603	TEMPERATURE SENSOR	37	For the LR6011
L6001	OPTICAL CONNECTION CABLE	34	For the LR8101, LR8102, 1 m (3.3 ft) length	L98604	TEMPERATURE SENSOR	37	For the LR6011
L6002	OPTICAL CONNECTION CABLE	34	For the LR8101, LR8102, 10 m (32.8 ft) length	L98611	TEMPERATURE SENSOR	37	For the LR6011
L6004	OUTPUT CORD	25	For Memory HiCoder, CM7290 and similar products	L98612	TEMPERATURE SENSOR	37	For the LR6011
L6005	OUTPUT CORD	25	For Memory HiCoder, CM7290 and similar products	L98613	TEMPERATURE SENSOR	37	For the LR6011
L6006	OUTPUT CORD	25	For Logger, CM7290 and similar products	L98621	TEMPERATURE SENSOR	37	For the LR6011
L6007	CONNECTION CABLE	112	For the CM4003	L98631	TEMPERATURE SENSOR	37	For the LR6011
L7017-10	TEST LEAD	62	For the ST3712, ST37 series, 3158	L98681	TEMPERATURE SENSOR	37	For the LR6011
L7017	CONNECTION CORD	25	For the Memory HiCoder series	L98691	CONNECTION CABLE	36	For the LR6041, LR6042, LR6043 and LR6051
L7018	CONNECTION CORD	25	For the Memory HiCoder series	L98700	WALL-MOUNTED HOLDER	36	For the LR6000 series (cannot use with the LR5051)
L7017-10	TEST LEAD	60	For the PR6000, PR6000, CM7290 and similar products	MR8000	MEMORY HCORDER	16	Main unit only, input modules up to 8 units
L7017-30	TEST LEAD	102	For the 3000, 10, 2010, 3120-10, and similar products	MR8000-01	MEMORY HCORDER	16	Ball-in-resistor waveform calculation and other functions
L7018	TEST LEAD	108	For the 3200, 3300, 3350 series	MR8740	MEMORY HCORDER	22	Max. 54ch, 860MHz memory, main unit only
L7017	CONNECTION CORD	25	1.6 m (5.2 ft) length	MR8741	MEMORY HCORDER	22	Max. 180ch, 100MHz memory, main unit only
L7017-01	CONNECTION CORD	74	3 m (9.8 ft) length	MR8700	WAVEFORM GENERATOR UNIT	42	For the MR6047A and similar products
L7017-02	CONNECTION CORD	74	10 m (32.8 ft) length	MR8791	PULSE GENERATOR UNIT	42	For the MR6047A and similar products
L7043	GRABBER CLIP	24	For the Memory HiCoder, L4000/9187, 9522	MR8827	MEMORY HCORDER	31	Max. 53ch, 512MHz memory, main unit only
L7057	CONNECTION CORD	67	For the CM2000-50 and similar products	MR8847-51	MEMORY HCORDER	21	Max. 16ch, 64MHz memory, main unit only
L7030	TEST LEAD	68	For the DT4000 series, CM4000 series and similar products	MR8847-62	MEMORY HCORDER	21	Max. 54ch, 860MHz memory, main unit only
L7030-50	VOLTAGE CORD	71	For the PW80001, PW8001, PW8000	MR8847-53	MEMORY HCORDER	21	Max. 16ch, 256MHz memory, main unit only
L7030-53	VOLTAGE CORD	81	For the PW80001 series, 3158 series, and similar products	MR8870-20	MEMORY HCORDER	20	3-ch, English model
L7030-55	VOLTAGE CORD	-	For the 3157	MR8870-30	MEMORY HCORDER	20	3-ch, Chinese model
L7030	POWER CABLE	25	For the SP7100	MR8875	MEMORY HCORDER	20	Max. 16-600ch, 32MHz memory, main unit only
L7031	USB CABLE	23	For the SP7100	MR8880-20	MEMORY HCORDER	19	4-ch, printer unit option, English model
L7037	RS-232C CABLE	67	For the BT3552	MR8880-21	MEMORY HCORDER	19	4-ch, printer unit option, Chinese model
L7039	CONVERSION CABLE	-	Bundled with the L98691 For the MR8000 and similar products	MR8901	ANALOG UNIT	26	For the MR6075
L7077	TEST LEAD	108	For the PR6000, PR6010 series, PR6100 series	MR8902	VOLTAGE/TEMP/UNIT	26	For the MR6075
L7077-01	BREAKER PIN	108	For the L98691 (PR6050 series, PR6100 series)	MR8903	STRAIN UNIT	26	For the MR6075
L7079-10	TEST LEAD WITH REMOTE SWITCH (RED)	108	For the PR6050 series, PR6100 series	MR8904	CAN UNIT	26	For the MR6075
L7079-11	TEST LEAD SET WITH REMOTE SWITCH	108	For the PR6050 series, PR6100 series	MR8905	ANALOG UNIT	26	For the MR6075
L7079-90	TIP PIN	108	For the L98691 (PR6050 series, PR6100 series)	MR8906	DIGITAL VOLTMETER UNIT	61	For the MR6050, MR6100, MR6145, MR627, and similar products
L7079-92	BREAKER PIN	108	For the L98691 (PR6050 series, PR6100 series)	MR8900	PRINTER UNIT	16	For the MR6060
L7090	CONNECTION CORD	25	For the Memory HiCoder series	MR9221-91	LOGIC PROBE	25	For the Memory HiCoder, miniature terminal type
L7090-01	ALLIGATOR CLIP	25	For the L98691 (For the Memory HiCoder series)	P-1201A	FELT PEN (RED)	-	For the PR6111 series, PR6100 series, EPR-3000 series
L7095-01	CONNECTION CABLE	62	For the MR8000, MR8000 and similar products	P-1201B	FELT PEN (RED)	-	For the PR61000 series, EPR-3000 series
L7095-02	CONNECTION CABLE	62	For the L98691, MR8000 and similar products	P-1201C	FELT PEN (RED)	-	For the PR61000 series, EPR-3000 series
L7096	CONNECTION CABLE	67	For the DT3424, DT3425	P-1202A	FELT PEN (GREEN)	-	For the PR6111 series, PR6100 series, EPR-3000 series
L7040	AUXILIARY EARTHING-ROD	115	For the PR6001, DT3151	P-1202C	FELT PEN (GREEN)	-	For the PR6111 series, PR6100 series, EPR-3000 series
L7041	MEASUREMENT CABLE	115	For the PR6001, DT3151	P-1203A	FELT PEN (BLUE)	-	For the PR6111 series, PR6100 series, EPR-3000 series
L7042-11	MEASUREMENT CABLE	115	For the PR6001, DT3151	P-1203C	FELT PEN (BLUE)	-	For the PR61000 series, EPR-3000 series
L7042-22	MEASUREMENT CABLE	115	For the PR6001, DT3151				
L7043-51	MEASUREMENT CABLE	115	For the PR6001, DT3151				
L7043-52	MEASUREMENT CABLE	115	For the PR6001, DT3151				
L7044	MEASUREMENT CABLE	115	For the PR6001, DT3151				
L7045-31	MEASUREMENT CABLE	114	For the PR6041				

Model No. (Order Code) Index

Note: D-mark = Discontinued or discontinued scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
P-1205A	FET PEN (BROWN)	—	For the INR-9000 series, EPR-2000 series	SE-10	RECORDING PAPER	25	For the PR6111, PR6112, EPR-3500 series, EPR-100
P-1205A	FET PEN (BLACK)	—	For the INR-9000 series	SE-102-2	RECORDING PAPER	25	For the PR6111, PR6112, EPR-3500 series, EPR-100
P2000	DC HIGH VOLTAGE PROBE	99	2000 V compatible	SF-10C02-35	—	25	For the INR-9000
P9000-01	DIFFERENTIAL PROBE	24	For the Memory HiCorder series, WavePRO	SF-10P02-45	—	25	For the PR6100
P9000-02	DIFFERENTIAL PROBE	24	For the Memory HiCorder series, WavePRO	SF1001	POWERLOGGER VIEWER	81	For the PR6300/33/35 series, 2100 series
PD3129	PHASE DETECTOR	117	—	SF4000	GENNECT One	118	Application for Windows
PD3129-1B	PHASE DETECTOR	117	Large clips	SF4071	GENNECT Cloud	119	Mobile app for iOS
PD3129-31	PHASE DETECTOR	—	Chinese model	SF4072	GENNECT Cloud	119	Mobile app for Android
PD3129-32	PHASE DETECTOR	—	Large clips, Chinese model	SF4100	GENNECT Cloud	116	Free plan with basic functions
PD3250-51	DIGITAL PHASE DETECTOR	116	Wireless Adapter Z3210 not included	SF4181-01	GENNECT Cloud Standard	116	GENNECT Cloud Standard 1-month license
PD3250-90	DIGITAL PHASE DETECTOR/WIRELESS ADAPTER	116	Bundled with the Wireless Adapter Z3210	SF4181-03	GENNECT Cloud Standard	118	GENNECT Cloud Standard 3-month license
PQ100	POWER QUALITY ANALYZER	79	Main unit, current sensor is sold separately	SF4181-12	GENNECT Cloud Standard	118	GENNECT Cloud Standard 12-month license
PQ100-01	POWER QUALITY ANALYZER KIT	79	Kit includes 600 A sensor x 2 and other options	SF4182-01	GENNECT Cloud Pro	118	GENNECT Cloud Pro 1-month license
PQ100-02	POWER QUALITY ANALYZER KIT	79	Kit includes 600 A sensor x 4 and other options	SF4182-03	GENNECT Cloud Pro	118	GENNECT Cloud Pro 3-month license
PQ100-04	POWER QUALITY ANALYZER KIT	79	Kit includes 6000 A sensor x 4 and other options	SF4182-12	GENNECT Cloud Pro	118	GENNECT Cloud Pro 12-month license
PQ100	POWER QUALITY ANALYZER	79	Main unit, current sensor is sold separately	SG-10Z	—	25	For the PR1-250 series
PQ100-02	POWER QUALITY ANALYZER KIT	79	Kit includes 600 A sensor x 4 and other options	SH-02-T1	—	25	For the PR1-210
PQ100-04	POWER QUALITY ANALYZER KIT	79	Kit includes 6000 A sensor x 4 and other options	SM7110	SUPER MEGOMM METER	59	1 ch, 1000 V output
PR-1RD	SOFT PEN (RED)	—	For the EPR-15/152/13/13/2/133	SM7120	SUPER MEGOMM METER	59	1 ch, 2000 V output
PR-2GN	SOFT PEN (GREEN)	—	For the EPR-15/152/13/13/2/133	SM7420	SUPER MEGOMM METER	59	4ch, Dedicated micro-current measurement
PR3335	POWER METER	77	Built-in LAN, RS-232C	SM7810	SUPER MO HITESTER	58	100/110V AC power supply
PR3335-01	POWER METER	77	Built-in LAN, GPIB	SM7810-20	SUPER MO HITESTER	58	230V AC power supply
PR3335-02	POWER METER	77	Built-in LAN, RS-232C, DIN output	SM7800-51	POWER SOURCE UNIT	58	100V AC power supply
PR3335-03	POWER METER	77	Built-in LAN, RS-232C, external sensor terminal	SM7800-52	POWER SOURCE UNIT	58	100V AC power supply
PR3335-04	POWER METER	77	Built-in LAN, RS-232C, GPIB, DIN output, external sensor terminal	SM7800-53	POWER SOURCE UNIT	58	100V AC power supply
PR3336	POWER METER	78	2ch	SM7800-54	POWER SOURCE UNIT	58	100V AC power supply
PR3336-01	POWER METER	78	2ch, built-in GPIB	SM7800-55	POWER SOURCE UNIT	58	100V AC power supply
PR3336-02	POWER METER	78	2ch, built-in DIN output	SM7800-56	POWER SOURCE UNIT	58	100V AC power supply
PR3336-03	POWER METER	78	2ch, built-in GPIB, DIN output	SM7800-57	POWER SOURCE UNIT	58	100V AC power supply
PR3337	POWER METER	78	3ch	SM7800-58	POWER SOURCE UNIT	58	100V AC power supply
PR3337-01	POWER METER	78	3ch, built-in GPIB	SM7800-61	POWER SOURCE UNIT	58	220V AC power supply
PR3337-02	POWER METER	78	3ch, built-in DIN output	SM7800-62	POWER SOURCE UNIT	58	220V AC power supply
PR3360-20	CLAMP ON POWER LOGGER	81	English model, main unit only	SM7800-63	POWER SOURCE UNIT	58	220V AC power supply
PR3360-21	CLAMP ON POWER LOGGER	81	English model, with harmonic analysis function	SM7800-64	POWER SOURCE UNIT	58	220V AC power supply
PR3360-26	CLAMP ON POWER LOGGER	—	Chinese model, main unit only	SM7800-65	POWER SOURCE UNIT	58	220V AC power supply
PR3360-31	CLAMP ON POWER LOGGER	—	Chinese model, with harmonic analysis function	SM7800-66	POWER SOURCE UNIT	58	220V AC power supply
PR3365-28	CLAMP ON POWER LOGGER	80	English model, main unit only	SM7800-67	POWER SOURCE UNIT	58	220V AC power supply
PR3365-30	CLAMP ON POWER LOGGER	—	Chinese model, main unit only	SM7800-68	POWER SOURCE UNIT	58	220V AC power supply
PR3390-01	POWER ANALYZER	74	—	SM9001	SIMPLYONE RECORDING WORKSTATION	60	For the SM-6200 series
PR3390-02	POWER ANALYZER	74	GPIB input	SME-8302	TRIAC/SCR/IGBT/IGBT/HVM/SCR/HVM	60	For the SM9001 (SM-6200 series)
PR3390-02	POWER ANALYZER	74	GPIB input, motor analysis	SME-8302	TRIAC/SCR/IGBT/IGBT/HVM/SCR/HVM	60	For the SM9001 (SM-6200 series)
PR3390-01	POWER ANALYZER	72	1ch	SME-8310	PLATE SAMPLE ELECTRODE	60	—
PR3390-02	POWER ANALYZER	72	2ch	SME-8311	ELECTRODE FOR FLAT SAMPLE	60	—
PR3390-03	POWER ANALYZER	72	3ch	SME-8320	WEIGHT ELECTRODE	60	—
PR3390-04	POWER ANALYZER	72	4ch	SME-8330	Liquid sample electrode	60	—
PR3390-05	POWER ANALYZER	72	5ch	SME-8340	SHIELDING BOX	60	—
PR3390-06	POWER ANALYZER	72	6ch	SME-8380	ELECTRODE FOR CHIP CAPACITOR	60	—
PR3390-11	POWER ANALYZER	72	1ch, motor analysis, DIN output	SP7001	NON-CONTACT CAN SENSOR	23	Sensor box only, supports CAN FD / CAN signals
PR3390-12	POWER ANALYZER	72	2ch, motor analysis, DIN output	SP7001-00	NON-CONTACT CAN SENSOR	23	Supports CAN FD/CAN signals, SP7001, SP7002, SP7003
PR3390-13	POWER ANALYZER	72	3ch, motor analysis, DIN output	SP7001-05	NON-CONTACT CAN SENSOR	23	Supports CAN FD/CAN signals, SP7001, SP7002, SP7003
PR3390-14	POWER ANALYZER	72	4ch, motor analysis, DIN output	SP7002	NON-CONTACT CAN SENSOR	23	Sensor box only, supports CAN signals
PR3390-15	POWER ANALYZER	72	5ch, motor analysis, DIN output	SP7002-00	NON-CONTACT CAN SENSOR	23	Supports CAN signals, SP7002, SP7002, SP7003
PR3390-16	POWER ANALYZER	72	6ch, motor analysis, DIN output	SP7100	CAN INTERFACE	23	For the SP7001, SP7002
PR3390-01	POWER ANALYZER	79	—	SP7150	CAN INTERFACE	23	For the SP7001, SP7002
PR3390-02	POWER ANALYZER	79	DIN output	SP9200	SIGNAL PROBE	23	For the SP7001, SP7002, screw type
PR3390-03	POWER ANALYZER	79	CAN	SP9250	SIGNAL PROBE	23	For the SP7001, SP7002, trigger type
PR3390-04	POWER ANALYZER	79	Optical link	SP9900	SLIP CABLE	23	For the SP7001
PR3390-05	POWER ANALYZER	79	DIN output, Optical link	SR-2	STANDARD RESISTOR	60	—
PR3390-06	POWER ANALYZER	79	CAN, Optical link	SS7912	DC SIGNAL SOURCE	62	—
PR3390-11	POWER ANALYZER	79	Motor analysis	SS7912-50	BATTERY CELL VOLTAGE GENERATOR	52	—
PR3390-12	POWER ANALYZER	79	Motor analysis, DIN output	ST4020A	COMMUNICATION PACKAGE	12	For the SS7912
PR3390-13	POWER ANALYZER	79	Motor analysis, CAN	ST5630	INSULATION TESTER	60	—
PR3390-14	POWER ANALYZER	79	Motor analysis, Optical link	ST5630-01	INSULATION TESTER	67	Built-in external I/O output
PR3390-15	POWER ANALYZER	79	Motor analysis, DIN output, Optical link	ST5640	LEAK CURRENT HITESTER	66	Built-in BCD output
PR3390-16	POWER ANALYZER	79	Motor analysis, CAN, Optical link	ST5641	LEAK CURRENT HITESTER	66	For medical-use and electrical devices
PR3390-01	POWER ANALYZER	79	Motor analysis, Optical link	ST9000	DISCHARGE DETECTION UPGRADE	66	For medical-use and electrical devices
PR3390-02	POWER ANALYZER	79	Motor analysis, DIN output, Optical link	SW1001	SWITCH MAINFRAME	52	3 slots
PR3390-03	POWER ANALYZER	81	For the PW3390/PW3390S	SW1002	SWITCH MAINFRAME	52	12 slots
PR3390-05	VOLTAGE LINE POWER ADAPTER	81	For the PW3390	SW9001	MULTIPLEXER MODULE	52	For SW1001 and similar products
PR3390-06	GPS BOX	80	For the PW318L/PW318	SW9002	MULTIPLEXER MODULE	52	For SW1001 and similar products
PR3390-07	SAFETY VOLTAGE SENSOR	81	For PW3395	U7001	2.5MHz INPUT UNIT	71	For the PW3391
PR3390-03	AC/DC CURRENT BOX	75	For the PW6001/PW601/PW6040, 3-ch	U7005	15MHz INPUT UNIT	71	For the PW6001
PR3390-04	AC/DC CURRENT BOX	75	For the PW6001/PW601/PW6040, 4-ch	U8300	SSD UNIT	21	For the MR8527, factory option
PR3390-10	ELCTRODE RESISTANCE MEASUREMENT SYSTEM	51	System product	U8301	SSD UNIT	21	For the MR8547A, factory option
PR3542	RESISTANCE HITESTER	50	—	U8302	SSD UNIT	19	For the MR8500, factory option
PR3542-01	RESISTANCE HITESTER	50	Built-in GPIB interface	U8303	SSD UNIT	19	For the MR8500, factory option
PR3542-02	RESISTANCE METER	50	—	U8305	PRINTER UNIT	21	For the MR8527, factory option
PR3542-01	RESISTANCE METER	50	Built-in GPIB interface	U8550	VOLTAGE/TEMP UNIT	33	For the LR6450, LR6450-01
PR3543	RESISTANCE HITESTER	49	—	U8551	UNIVERSAL UNIT	33	For the LR6450, LR6450-01
PR3543-01	RESISTANCE HITESTER	49	Built-in GPIB interface	U8552	VOLTAGE/TEMP UNIT	33	For the LR6450, LR6450-01
PR3544	RESISTANCE METER	49	No interface	U8553	HIGH SPEED VOLTAGE UNIT	33	For the LR6450, LR6450-01
PR3544-01	RESISTANCE METER	49	Built-in EXI I/O, RS-232C, USB	U8554	STRAIN UNIT	33	For the LR6450, LR6450-01
PR3545	RESISTANCE METER	45	—	U8555	CAN UNIT	33	For the LR6450, LR6450-01
PR3545A-1	RESISTANCE METER	47	Single-channel model	U8556	CURRENT MODULE	33	For the LR6450, LR6450-01
PR3545A-2	RESISTANCE METER	47	Support for the multiplexer unit	U8700	ARBITRARY WAVEFORM GENERATOR UNIT	62	For the MR8547A and similar products
PR3545-01	RESISTANCE METER	49	Built-in GPIB interface	U8754	VIR GENERATOR UNIT	62	For the MR8547A and similar products
PR3545-02	RESISTANCE METER	48	Support for the multiplexer unit	U8949	STRAIN UNIT	19	For the MR8500, MR8541A, MR8527, and similar products
PR3548	RESISTANCE METER	45	—	U8974	HIGH VOLTAGE UNIT	19	For the MR8500 and similar products
PR3609	MAINTENANCE TOOL	51	For the PR62010	U8975	4CH ANALOG UNIT	19	For the MR8500 and similar products
PR36010-01	FOUR-POINT ARRAY PROBE	48	For the PR62545 series	U8976	HIGH SPEED ANALOG UNIT	19	For the MR8500 and similar products
PR36010-02	FOUR-POINT ARRAY PROBE	48	For the PR62545 series	U8977	3CH CURRENT UNIT	19	For the MR8500 and similar products
SA2631-01	3-DAY LICENSE	51	License card, for the Slurry Analytical System	U8978	4CH ANALOG UNIT	19	For the MR8500 and similar products
SA2631-03	30-DAY LICENSE	51	License card, for the Slurry Analytical System	U8979	CHARGE UNIT	19	For the MR8500 and similar products
SA2631-05	365-DAY LICENSE	51	License card, for the Slurry Analytical System	U9001	DIGITAL VOLTMETER UNIT	61	For the MR8743-00
SA9001	ELECTRODE CELL	51	For the Slurry Analytical System	VT1005	AC/DC HIGH VOLTAGE DIVIDER	74	For the PW6001, PW6001, PW3390
SA9002	TEST FIXTURE	51	For the Slurry Analytical System	Z1000	BATTERY PACK	19	For the MR8500, LR6450 series

Model No. (Order Code) Index

Note: D mark: Discontinued or discontinued scheduled model.

Model No.	Name	Page	Note
Z1002	AC ADAPTER	19	For the MR660, MR675, PQ2100
Z1003	BATTERY PACK	20	For the MR675, PQ2100/PW3100, PQ5100
Z1005	AC ADAPTER	20	For the MR670/9570, LR6421/9400 series
Z1006	AC ADAPTER	21	For the PW3500 series
Z1007	BATTERY PACK	21	For the LR6410 and similar products
Z1008	AC ADAPTER	21	For the LR6410, PW3500 series, PW300 and similar products
Z1009	FIXED STAND	21	For the LR6410 series
Z1013	AC ADAPTER	29	For the SP7001, SU7002, CM4028
Z1014	AC ADAPTER	28	For the LR6450 and similar products
Z1015	AC ADAPTER	34	For the LR6101, LR6102
Z2000	HUMIDITY SENSOR	31	For the LR6410/95400 series
Z2001	TEMPERATURE SENSOR	46	For the PW3545 series and similar products
Z2002	TEMPERATURE SENSOR	45	For the PW3548
Z2003	AC ADAPTER	36	For the LR6512 series
Z2005	TEMPERATURE SENSOR	56	For the BT4540, 1 m (3.28 ft) length
Z2010	HUMIDITY SENSOR	36	For the LR6514
Z2011	HUMIDITY SENSOR	36	For the MR6540, MR5250/53 series
Z3000	GP-IB INTERFACE	56	For the MR6540, MR5250/53 series
Z3001	RS-232C INTERFACE	56	For the MR6540, MR5250/53 series
Z3002	LAN INTERFACE	41	For the MR6540, MR5250/53 series
Z3003	MULTIPLEXER UNIT	48	For the PW3545-02, input scanner
Z3010	WIRELESS ADAPTER	119	For the CM4061, FT6031-50 etc.
Z3030	WIRELESS LAN ADAPTER	58	For the LR6530 series
Z4001	SD MEMORY CARD 2GB	19	For the PG2104, PQ2100, MR675 and similar products
Z4003	SD MEMORY CARD	19	For the PG2106, PG2102, MR675 and similar products, 32GB
Z4006	USB DRIVE	19	For the MR6600 and similar products, 16GB
Z5003	CONTACT ADAPTER	—	For the FT3425, FT3406
Z5004	MAGNETIC STRAP	80	For the PG2106, PG2102, PW3000 series and similar products
Z5008	THERMALLY CONDUCTIVE TAPE	—	For the Z2812s, 20 sheets set
Z5010	CONVERSION ADAPTER	58	For the SM710, SM730 and similar products, custom order product
Z5029	MAGNETIC STRAP	118	For the PG2104-50, DT4250/4280 series
Z5021	PROBE POWER UNIT	19	For the MR6600, battery option
Z5022	SHOULDER STRAP	115	For the FT3151
Z5023	EXTENSION CART	87	For the FT3424, FT3425
Z5038	O ADJ BOARD	54	For the L2100, L2110 (BT3004) and similar products
Z5040	FIXED STAND	38	For the LR6450, LR6450-01
Z5041	PROTECTOR	45	For the BT3554-50 series
Z5042	PROTECTOR	103	For the IR4250
Z5050	FUSE SET	57	For the BT3554-50 series

Model No. Name

Model No. Name

Model No. Note

Model No. Note

Model No. (Order Code) Index

Note: D-mark: Discontinued or discontinuation scheduled models.

Model No. Name

Page Note

Model No. Name

Page Note

Product warranties

HIOKI products are generally covered by a three-year warranty.

Product warranty	In the event HIOKI is responsible for the failure of a product during the warranty term beginning on the date of purchase (or beginning in the month the product was manufactured if the date of purchase is unclear), we will repair or replace the product free of charge.
Warranty scope	We check products on a standalone basis to verify their specifications, performance, and functionality. Although we verify proper operation of components that are connected to HIOKI products in standard configurations, we ask that customers verify proper operation of their HIOKI products when connected to other manufacturers' products. The scope of HIOKI's warranty is limited to HIOKI products. Connected devices and issues caused by connected devices are considered outside the scope of the warranty. In the event of physical damage, any compensation that might be provided by HIOKI is limited to the purchase price of the product.
Accuracy guarantee	For products with an accuracy guarantee, we guarantee the level of accuracy indicated in the specifications for a certain period of time following shipment from the factory. In the event of an accuracy defect during that period of time, we will adjust the product free of charge.

Calibration and repair service

Calibration Expiration (Calibration Interval)	Values obtained on the date of calibration are used as the calibration results. When calibration expires (i.e., the calibration interval) depends on the customer's operating conditions and environment. Consequently, the customer is ultimately responsible for determining calibration expiration while taking into account the calibration interval recommended by Hioki.
Recommended calibration interval	Hioki recommends that each product's accuracy guarantee period be treated as the recommended calibration interval.
Guarantee after Calibration Service*	If a customer reports a loss of accuracy after calibration while the instrument in question is covered by the recommended calibration interval and we are able to verify the issue, we will adjust the instrument free of charge. (If the product is subject to a regular calibration request, we will adjust it as part of the calibration fee.)
Guarantee Conditions	<ul style="list-style-type: none">• If a loss of accuracy is caused by a part's having reached its service life or deteriorated, fees will apply to the repair.• If the loss of accuracy is deemed likely to have been caused by damage or by the operating or storage environment, fees will apply to the repair.• If a product is deemed likely to experience a loss of accuracy after shipment, for example due to the end of the repair period, we may contact the customer and decline to offer a guarantee.• The guarantee applies to products that are calibrated at Hioki.
Guarantee of repaired products	If, within six months of the original repair, HIOKI is responsible for an issue requiring an additional repair (a repair of the same issue) of a product that has been used as described in its user manual, we will repair it free of charge.
Repair term	We may improve products or switch models without notice in order to enhance the competitiveness of our products and our productivity. We will repair discontinued products for a minimum of five years from the date of their discontinuation, although we may elect to propose that the customer switch to an alternative model if it is difficult to repair a product due to social or economic conditions. Once five years have passed since a product's discontinuation, we will only accept inspection and calibration requests for that product if we are able to perform that work in-house.

*1: Not all products are covered by this guarantee.

Quality of HIOKI's calibration and repair service



80 years of history and fine-grained, expert service

Technicians performing calibration, adjustment, and repair work undergo in-house training to ensure they possess the specialized expertise and skills that such work demands.

Precise calibration and adjustment guidelines compiled by product designers


We determine everything from the procedures for measuring instrument functionality checks to calibration points based on the results of reviews conducted by designers who are well versed in the characteristics of products' internal circuitry and the principles that underlie their operation. In this way, we are able to provide optimal, extensive calibration and adjustment service as only the manufacturer can.

Highly reliable service that's traceable to national standards

The standard devices we use to calibrate and adjust products are all linked to national standards, ensuring that we can issue inspection reports with accurate, reliable calibrated values.

Comprehensive calibration and repair service with fast turnaround

If we discover a malfunction or failure during the calibration process, we'll contact you to let you know where the problem is and what's necessary to address it. If you wish, we'll then repair the product. This capability eliminates unnecessary back-and-forth so you can put your product back to work as soon as possible.

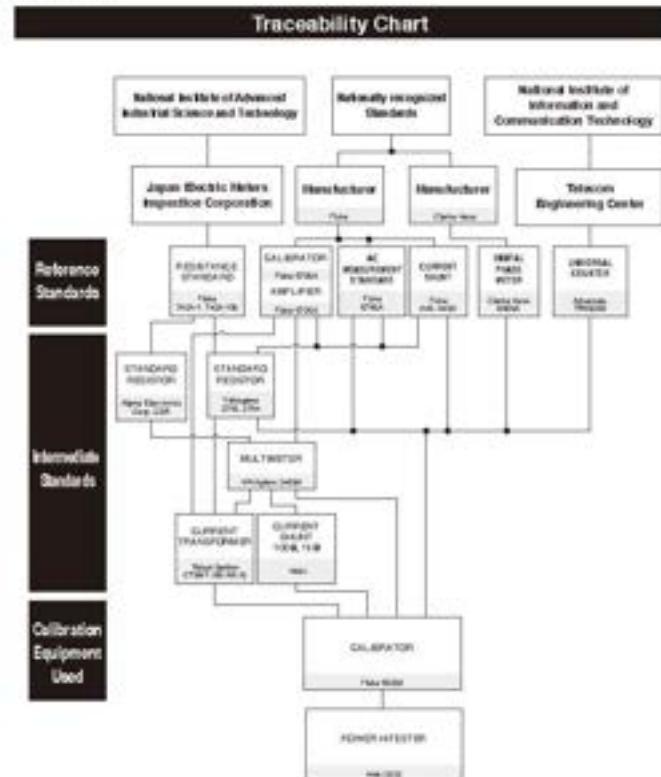

Calibration and Repair Service

(1) Service content

HIOKI's calibration services were updated effective April 2022.

"Calibration Services"


When an instrument is calibrated and its measured values are found not to satisfy internal HIOKI standards, the instrument is adjusted. Through the ongoing use of calibration services offered as only an instrument manufacturer can, customers are able to use their instruments with peace of mind while maintaining their precision.

This calibration service will allow us to return products to customers with minimal downtime, since there are no work interruptions.

Notes

If you do not wish your instrument to be adjusted, please let us know when you request calibration. Your product will be returned without adjustment, even if the calibration report indicates a FAIL judgment (non-compliance).

*This service does not extend to products that cannot be adjusted or to discontinued products.

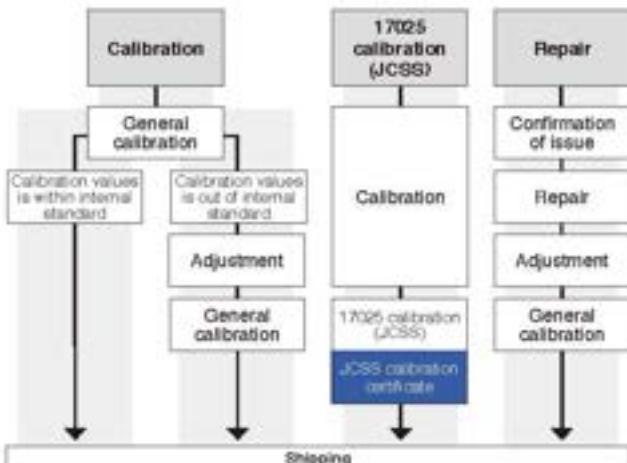

*JCSS calibration is also available as a standalone service.

(2) Documents we can issue and their content

Sample documents are also available on HIOKI's website.



- Calibration results
- Judgment



- Calibration certificate declaration
- Information about equipment used in calibration



- Calibration results
- Inaccuracies
- Coverage factor
- Calibration certificate declaration
- IAO-MRA, IA Japan, and JCSS logos



- Calibration certificate declaration
- Information about lighting standards



An overview tracing HIOKI product groups to national standards via individual standard devices.



A detailed diagram tracing a particular product model to national standards via individual standard devices.

Calibration

Calibration provides a way to check the condition of a measuring instrument by comparing the ideal value indicated by a standard device with the value indicated by the instrument being calibrated.

Adjustment

Calibration values will be optimized so that the instrument satisfies HIOKI's internal standards.

If an instrument is adjusted as part of calibration service

Values are optimized so that they satisfy HIOKI's internal standards to reduce the risk that they will subsequently exceed the tolerance.

Adjustment is performed since the tolerance is anticipated to be exceeded during the next calibration.



Difference between general calibration and 17025 calibration (JCSS)



This is the mark of the calibration service provider registration program based on the Measurement Act. JCSS-accredited service providers are registered under the JCSS. JCSS member: HIOKI E.E. CORPORATION is an International MRA-accredited service provider. JCSS's accreditation number is JCSS 010.

JCSS calibration is a type of third-party-accredited calibration based on ISO/IEC 17025. General calibration is a type of calibration determined by HIOKI based on ISO 9001. HIOKI can issue calibration certificates bearing the JCSS mark for instruments that have undergone JCSS certification, and they are valid internationally since they are international MRA-compliant.

Differences in calibration points

General calibration

Calibration is performed for all parameters that need to be checked in order to maintain the performance of the measuring instrument as determined by the product designer.

17025 calibration (JCSS)

Calibration is performed using points registered as the JCSS calibration range and selected by the customer.

Differences in information on calibration documents

General calibration

- Calibration results: Included on inspection report.
- Inaccuracies: Not included.
- Traceability chart: Yes

17025 calibration (JCSS)

- Calibration results: Included on calibration certificate.
- Inaccuracies: Included on calibration certificate.
- Traceability chart: No (JCSS and other logos certify traceability)

Service capability and warranty duration

You can find out whether HIOKI accepts repair and calibration requests for your instrument, associated lead times if so, and the information listed below simply by entering the product model number on HIOKI's website.

Product Model	Availability of repair and calibration service
Results	Calibration Interval
Product warranty period	Date production discontinued

Sales and service network

● HQ ● Regional Group HQ ● Office of Group Companies



HIOKI
HIOKI E.E. CORPORATION

HEADQUARTERS
81 Koizumi,
Ueda, Nagano 396-1192 Japan
<http://www.hioki.com>



DISTRIBUTED BY

GETROTECH

Fone: (11) 2673-1111 / 2942-1212
e-mail: vendas@getrotech.com.br
Website: www.getrotech.com.br